




EWAD950BJYNN/A+OPLN+OPTP


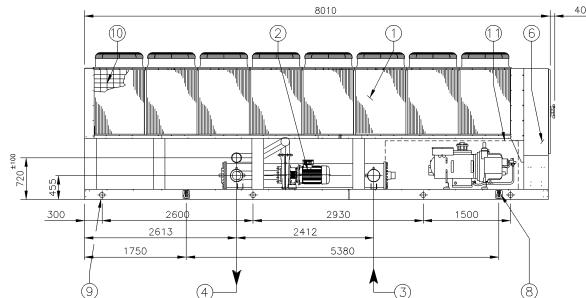


Legend

- ① Condenser coil
- ② Evaporator
- ③ Evaporator water inlet
- ④ Evaporator-pump water outlet victaulic connection for 139.7 O.D. tube
- ⑤ Victaulic connections for 219.1 O.D. tube
- ⑥ Operating and control panel
- ⑦ 360x150 slot for power and control panel connection
- ⑧ 4 lifting shackles
- ⑨ 8 isolator mounting holes 25 mm DIA.
- ⑩ Coil protection guards (optional)
- ⑪ Compressors enclosure (optional)

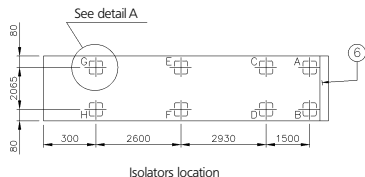

Detail "A" rubber isolator



Version	Condenser type	Weight KG		Isolators load KG							
		Shipping	Operating	A	B	C	D	E	F	G	H
EWAD950BJYNN/A+OPTP	Aluminium	6695	6940	1044	1129	1110	1185	832	847	404	389
EWAD950BJYNN/A+OPRN+OPTP	Acrylic coated										
EWAD950BJYNN/A+OPLN+OPTP	Aluminium	6935	7180	1104	1189	1170	1245	832	847	404	389
	Acrylic coated										
EWAD950BJYNN/A+OPTP	Rubber isolators	Type (q/ty)		786010-m (4 Pz)				786011-m (2 Pz)		786011-m (2 Pz)	
EWAD950BJYNN/A+OPRN+OPTP											
EWAD950BJYNN/A+OPLN+OPTP											