




EWAD950BJYNN/A+OPLN

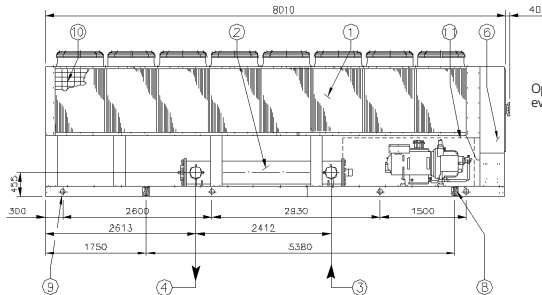



Fan arrangements and minimum clearance requirements

Legend

- ① Condenser coil
- ② Evaporator
- ③ Evaporator water inlet
- ④ Evaporator water outlet
- ⑤ Victaulic connections for 219.1 O.D. tube
- ⑥ Operating and control panel
- ⑦ 360x150 slot for power and control panel connection
- ⑧ 4 lifting shackles
- ⑨ 8 isolator mounting holes 25 mm DIA.
- ⑩ Coil protection guards (optional)
- ⑪ Compressors enclosure (optional)

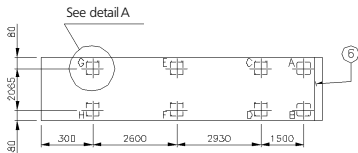

Isolators location



Version	Condenser type	Weight KG		Isolators load KG							
		Shipping	Operating	A	B	C	D	E	F	G	H
EWAD950B/JYNN/A	Aluminium	6155	6400	1065	1150	875	950	750	765	430	415
EWAD950B/JYNN/A+OPRN	Acrylic coated										
EWAD950B/JYNN/A+OPLN	Aluminium	6395	6640	1125	1210	935	1010	750	765	430	415
	Acrylic coated										
EWAD950B/JYNN/A	Rubber isolators	Type (g/ty)		786010-m (4 Pz)				786010-w (4 Pz)			
EWAD950B/JYNN/A+OPRN											
EWAD950B/JYNN/A+OPLN											