



EWAPC14AJYNN/A


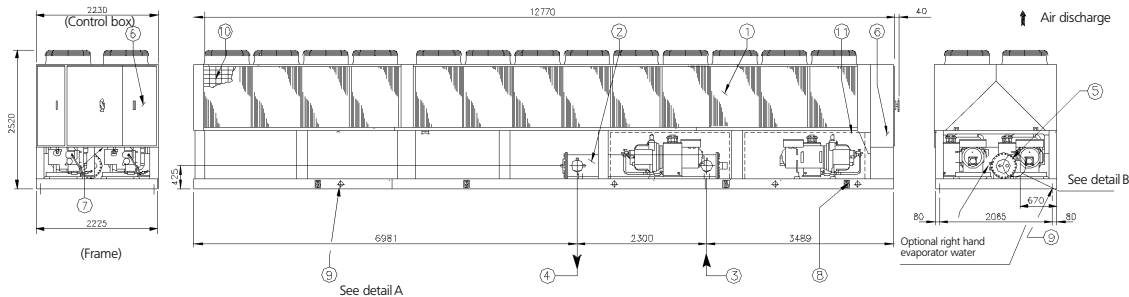


Legend

- ① Condenser coil
- ② Evaporator
- ③ Evaporator water inlet
- ④ Evaporator water outlet
- ⑤ Victaulic connections for 219.1 O.D. tube
- ⑥ Operating and control panel
- ⑦ 360x150 slot for power and control panel connection
- ⑧ 8 lifting shackles
- ⑨ 12 isolator mounting holes 25 mm DIA.
- ⑩ Coil protection guards (optional)
- ⑪ Compressors enclosure (optional)

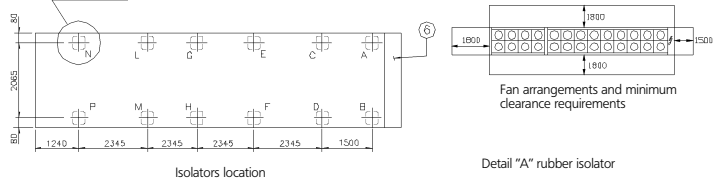

Detail "A" rubber isolator

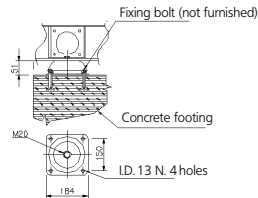

Version	Condenser type	Weight KG		Isolators' load KG											
		Shipping	Operating	A	B	C	D	E	F	G	H	L	M	N	P
EWAPC14A/YNN/A	Aluminium	9925	10400	1140	1140	955	955	1385	1385	570	570	510	510	640	640
EWAPC14A/YNN/A+OPRN	Acrylic coated														
EWAPC14A/YNN/A+OPLN	Aluminium	10285	10760	1200	1200	1035	1035	1425	1425	570	570	510	510	640	640
	Acrylic coated														
EWAPC14A/YNN/A	Rubber isolators	Type (q/t/y)													
EWAPC14A/YNN/A+OPRN															
EWAPC14A/YNN/A+OPLN															