


2AMX50G


unit (mm)

Drain outlet
(I.D. ϕ 15,9 hose for connection)


4 holes for anchor bolts (M8 or M10)

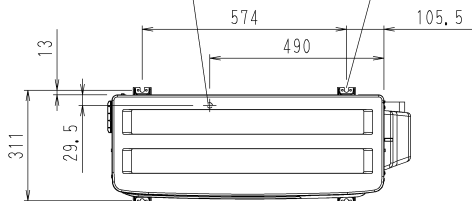

Handle

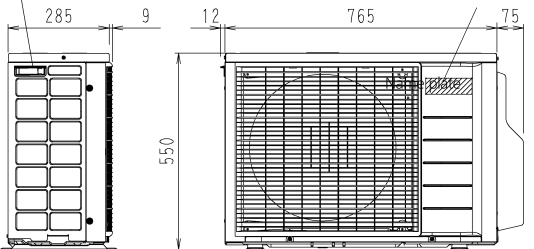


Name plate



Minimum space for air passage

Wall height on air outlet side = less than 1200

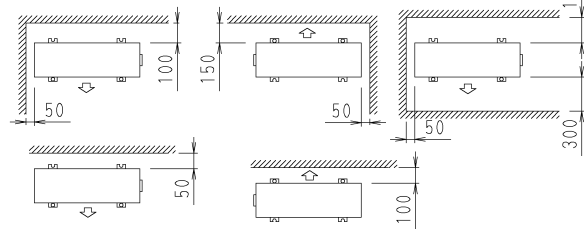


<room A>

2-Terminal strip with earth terminal

Liquid stop valve (ϕ 6,4CuT)
Gas stop valve (ϕ 9,5CuT)

Outdoor thermistor

Service port



<room B>

Liquid stop valve (ϕ 6,4CuT)

Gas stop valve (ϕ 12,7CuT)

In case of removing stop valve cover

