



R-32 BLUEEVOLUTION

Decarbonisation of buildings made easy: Benefit from leading VRV 5 technology!



VRV 5 S-series

VRV 5 Heat Recovery

VRV 5 Heat Pump



We're on a mission to build a sustainable legacy

It is in our DNA to provide safe, healthy and comfortable spaces throughout the building life cycle using world-leading technology. Driven by a dedication to achieve net zero CO₂ emissions by 2050, we work together with our partners and customers in helping to create a world with healthier indoor air and minimal environmental impact

Our sustainability values

Supporting decarbonisation

Our solutions are designed to **support your sustainable goals by reducing the CO₂ footprint of buildings**, whether they are new builds or renovation.



We continuously develop products with lower CO₂ footprint



We maximise real life seasonal efficiency, delivered in a transparent and trustworthy way



We reuse materials where possible, including refrigerants

A collective journey

Together with our partners and customers, we are working towards the sustainable transformation of our buildings. We provide expert **support and peace of mind** throughout the building life cycle, ensuring **future-proof** solutions for a healthier planet.



We help to make the right choice based on the total lifecycle impact of the solutions



Our team of experts provide in-depth knowledge in the use of EPDs, green building schemes, etc.



AI predictive monitoring of our systems, keeps running costs low and maximises uptime

Building for the future

As market leaders in total solutions, we are constantly **innovating to meet your changing needs** and offer you a comfortable, healthy and safe environment.



With our wide range of reliable solutions, our experts can meet even the most complex demands



Making fresh air supply and filtration an integral part of our solution ensures maximum well being



Our solutions are in line with or ahead of legislation, proving you complete peace of mind



Benefits of R-32

Already used on large scale, R-32 can be implemented today and make a significant step towards decarbonising buildings.


- **Lower Global Warming Potential (GWP):** only 1/3rd of R-410A
- **Lower refrigerant charge:** up to 15% less compared to R-410A
- **Higher energy efficiency,** greatly reducing the indirect CO₂ eq. impact
- **Single component refrigerant,** easy to handle and recycle.



Ahead of the new F-gas regulation

- All VRV 5 investments made are **fully future-proof** and the best answer to decarbonize buildings today!

2024 F-gas regulation timeline (until review date 2030)

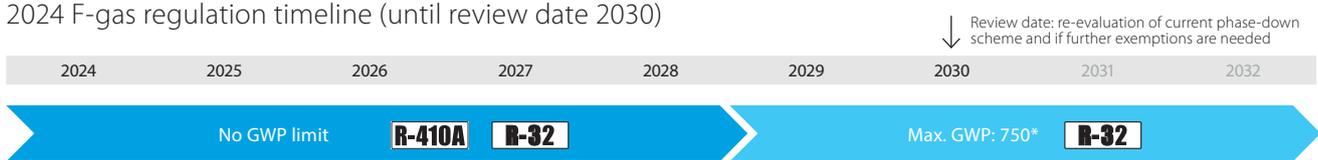

* With safety exemptions
Confirmed timings considering available quota



Servicing of existing equipment remains possible for the entire lifetime of the products



Benefits of VRV systems

VRV systems offer commercial buildings maximum design flexibility and comfort thanks to the advantages of direct expansion (DX) systems:



More responsive

- **Immediate reaction** to changing conditions helps avoid overheating
- **Highly efficient:** Only 2 energy transfer steps are needed (from air to refrigerant, and from refrigerant to air)¹



Quick and easy to install:

- **All-in-one box solution** without any requirement for field supplied equipment (e.g. gauges, pumps and valves)
- **Limited space requirements:** All components are integrated, and refrigerant piping is compact

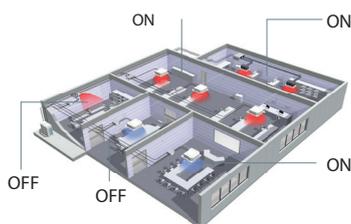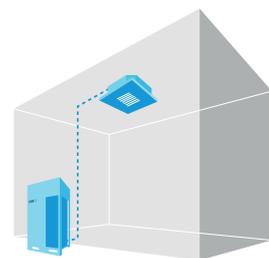

Precise zone control:

- Only provide heating or cooling **where needed**
- **High comfort levels:** Individual control and simultaneous cooling and heating for perfect personal environment

Complete building solution

- Including smart cloud controls, ventilation, ...
- Fully integrated fresh air solution with energy recovery, air purification, humidification and air discharge temperature control
- Smart central control and energy optimization via the cloud



Decarbonisation made easy



Top sustainability



Market-leading seasonal efficiency

- SCOP up to 200.5%
- SEER up to 324.5%
- Tested with real life indoor units



Full transparency of total life cycle impact

- The available EPD certification outlines the environmental impact of VRV 5 over its lifetime
- Ideal for green building certification



Reduced direct CO₂ impact with 71% compared to R-410A systems

- 68% lower Global Warming Potential
- 15% less refrigerant charge
- Single component refrigerant
- Reduced F-gas tightness inspections

For detailed information on the specifications of a particular range, please consult the product pages in this catalog.

An R-32 system for every VRV application

- Unmatched outdoor unit range
- 3 different models
- Capacity from 12.1 up to 87.5 kW

 12.1kW ↔ 78.5kW
 14.2kW ↔ 87.5kW



VRV 5 S-series

VRV 5 Heat Recovery

VRV 5 Heat Pump

Ultra-flexible



- Down to -20°C in heating
- Up to +52°C in cooling

Wide operation range



- 165m longest length
- 90m height difference
- 1,000m total length
- Compatible with Tightfit, fireless copper pipe connector

Wide piping flexibility to tackle any VRV application



- Sound pressure down to 39 dB(A)
- Increased installation space flexibility
- Easier project design

5 low sound steps



- Ideal for monovalent heating
- Available on all multi combination models

Continuous heating during defrost



Unique Shîrudo Technology provides full peace of mind out of the box



- No need for complex calculations to select safety measures
- No additional installation and commissioning work
- No visual impact of additional sensors etc.
- No additional work and considerations in case of layout changes
- No periodic safety checks

Check out the Shirudo Technology video!

What is included in Shîrudo Technology?

- **Complete peace of mind** as all refrigerant control measures are factory-integrated, ensuring compliance to the IEC60335-2-40 product standard, 3rd party certified



Leak detection sensor in every indoor unit



Audible & visual alarm in Madoka controller



Shutoff valves in the outdoor unit or SV box




Specially developed algorithms

- Full **validation** of your project via our Xpress software

Widest R-32 portfolio

Match any application



- Meet any comfort and aesthetical demand
- 11 unit models in 96 variations
- Capacities from 1.1 kW in cooling, up to 31.5 kW in heating



Widest range of dedicated R-32 indoor units on the market



Easily integrates fresh air units

- Plug & play ventilation solutions from 150 up to 140.000 m³/h
- For indoor (in-ceiling or floor) and outdoor installation
- Wide choice of filtration options to optimise IAQ
- Offers different energy recovery, air purification, humidification and air discharge temperature control options



Connectable to all Daikin smart controls

- Onecta app**
- intuitive control, no matter where you are



- Daikin Cloud Plus**
- Smart centralized control & energy optimisation
- AI Predictive maintenance indicates when maintenance or replacements are needed
- Remote site access enables to optimize and monitor the system without the need for an on-site visit



Excellent support


Wide network of experts with specialised advice

**BREEM
LEED**

Maximise your BREEM/LEED score with expert support from design to execution



Our WebXpress software with visual floorplan interface makes design easy and ensures compliance with product standards

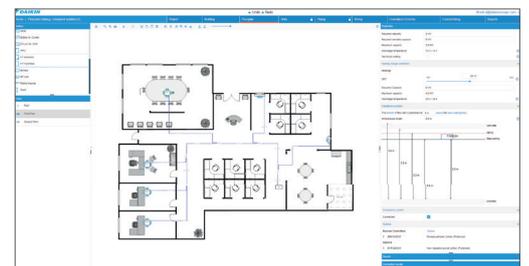



Outdoor units

Cases

REYA-A | VRV 5 Heat Recovery

BS-A | Multi branch selector for VRV 5 Heat Recovery

NEW RXYA-A | VRV 5 Heat Pump

NEW RXYSA-AV1/AY1 | VRV 5 S-series

SV-A | Optional Shut off valve box for VRV 5 Heat Pump

Technical benefits

p. 12

p. 14

p. 16

p. 18

p. 20

p. 21

p. 22

VRV 5 outdoor unit overview

Capacity class (kW)

Model	Product name	4	5	6	8	10	12	13	14	16	18	20	22	24	26	28	VRV indoor units HRV units VAM	HRV units EKVDX	AHU connection	Air curtains	Remarks	
Cooling Capacity					22.4	28.0	33.5	36.4	40.0	45.0	50.4	56.0	61.5	67.4	73.5	78.5						
Heating Capacity					25.0	31.5	37.5	41.0	45.0	50.0	56.5	63.0	69.0	75.0	82.5	87.5						
Air-cooled heat recovery VRV 5 heat recovery	<ul style="list-style-type: none"> Reduced CO₂ equivalent thanks to the use of lower GWP refrigerant R-32 Top sustainability over the entire lifecycle „Free“ heating through heat recovery Tackle small room applications thanks to Shirudo Technology The perfect personal comfort thanks to simultaneous cooling and heating 		REYA-A				●	●	●		●	●	●	●								
									●	●		●	●	●	●	●	●	●		○	○	○
Air-cooled heat pump NEW VRV 5 heat pump	<ul style="list-style-type: none"> Reduced CO₂ equivalent thanks to the use of lower GWP refrigerant R-32 Top sustainability over the entire lifecycle Tackle any room thanks to Shirudo Technology 		RXYA-A				●	●	●		●	●	●	●								
										●	●		●	●	●	●				○	○	○
Air-cooled VRV 5 S-series	<ul style="list-style-type: none"> Reduced CO₂ equivalent thanks to the use of lower GWP refrigerant R-32 Top sustainability over the entire lifecycle Unique low -height single fan range Tackle small room applications thanks to Shirudo technology 		RXYS-A AV1/AY1	1~	●	●	●															
				3~	●	●	●	●	●	●												

● Single unit, ● Multi combination

> Standard total system connection ratio limit: 50 ~ 130%

Decarbonisation in practice

Learn how Daikin experts assist customers to reach their sustainability and comfort targets, while staying in budget

“A landmark project meeting the highest standards, the Meylan Arteparc sets the bar for designing future-proof buildings that consistently deliver on *energy performance and comfort*”



Arteparc office complex

Daikin VRV heat pumps contribute to low carbon footprint and is awarded with the HQE excellent label

Location: Grenoble, France
Type: New built, commercial complex
Project size: 25,000m²
Total outdoor units: 115



Challenges:

- Achieve HQE BBC (Low Carbon Building) certification label
- Provide an HVAC system to offset the increased CO₂ emissions, caused by additional use of concrete

Daikin solution:

- **Close co-operation** between design office and Daikin design support
- In-depth study to **optimize the air flows** of the full installation to maximize system performance and user experience
- Daikin's VRV5 with R-32 was crucial to support the required offsetting of CO₂, with a **whole life carbon reduction of 27%** compared to R-410A solutions





“Daikin offers 24/7 monitoring with predictive maintenance for *complete peace-of-mind*. Issues are solved before they occur, maximizing room availability and customer satisfaction.”

Victoria hotel, Park Plaza

Location: Amsterdam, The Netherlands

Type: Refurbishment, Hotel

Project size: 7 floors, 150 rooms, 25m²/room


Total outdoor units: 12

Challenges:

- Provide a future proof, low carbon solution
- Keep historical building outlook intact
- Provide total peace of mind

Daikin solution:

- Implementation of **VRV 5 heat recovery**, using lower GWP refrigerant R-32 boosting efficiency thanks to the re-use of excessive heat from rooms in cooling, to heat up rooms in need of heating
- The **modular and compact** concept of VRV outdoor units and very small piping made it the best solution to keep the historical value of the building.
- With **Shirudo Technology** all legislative requirements are factory integrated, keeping additional design work to a minimum

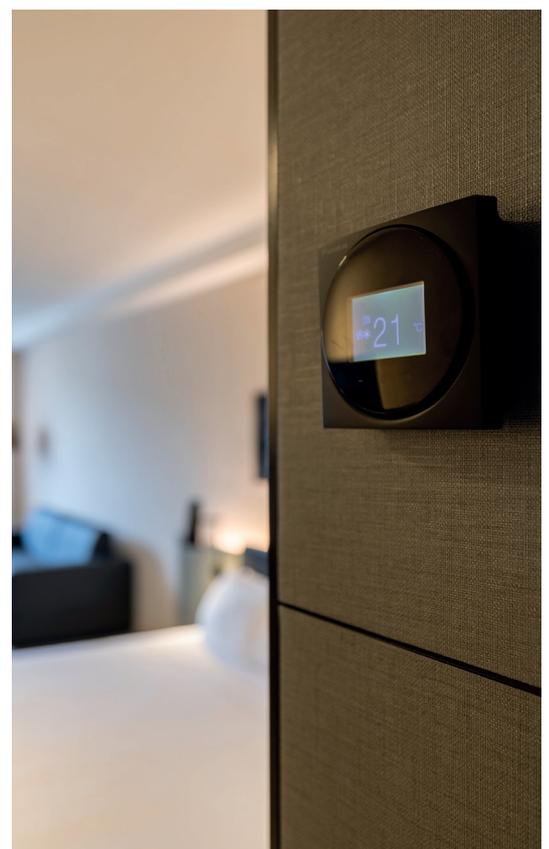


VRV 5 Heat Recovery

Best efficiency and comfort solution


- Reduced CO₂ equivalent thanks to the use of lower GWP R-32 refrigerant and lower refrigerant charge
- Single component refrigerant, easy to re-use and recycle
- Greatest sustainability over the entire lifecycle, thanks to market leading real-life seasonal efficiency
- “Free” heating through efficient 3-pipe heat recovery, transferring heat from areas requiring cooling to areas requiring heating
- Tackle small room applications, thanks to Shīrudo technology
- Specially designed indoor units for R-32, ensuring low sound and maximum efficiency
- Simultaneous cooling and heating for the perfect personal comfort of guests/tenants
- Maximum installation flexibility with piping lengths up to 165 meters and a total length of 1,000 meters
- Sound pressure down to 40 dB(A) thanks to 5 low sound steps
- ESP up to 78 Pa to allow ducting
- Wide operation range of up to +46°C in cooling and down to -20°C in heating
- Incorporates VRV IV standards & technologies: Variable Refrigerant Temperature, continuous heating, 7 segment display and full inverter compressors, 4-side heat exchanger, refrigerant cooled PCB, new DC fan motor



“Free” heating through heat recovery



Simultaneous cooling & heating for maximum comfort



3-pipe technology: up to 15% more efficient compared to 2-pipe system

More details and final information can be found by scanning or clicking the QR codes.

REYA-A



Outdoor unit		REYA	8A	10A	12A	14A	16A	18A	20A	
Capacity range		HP	8	10	12	14	16	18	20	
Cooling capacity	Prated,c	kW	22.4	28.0	33.5	40.0	45.0	50.4	56.0	
Heating capacity	Prated,h	kW	22.4	28.0	33.5	40.0	45.0	50.4	56.0	
	Max. 6°CWB	kW	25.0	31.5	37.5	45.0	50.0	56.5	63.0	
Recommended combination			4 x FXFA50A2VEB	4 x FXFA63A2VEB	6 x FXFA50A2VEB	1 x FXFA50A2VEB + 5 x FXFA63A2VEB	4 x FXFA63A2VEB + 2 x FXFA80A2VEB	3 x FXFA50A2VEB + 5 x FXFA63A2VEB	8 x FXFA63A2VEB	
ηs,c		%	290.8	282.6	285.3	306.1	281.0	280.6	262.2	
ηs,h		%	161.5	170.2	176.4	168.3	167.5	172.5	162.7	
SEER			7.35	7.14	7.21	7.73	7.10	7.09	6.63	
SCOP			4.11	4.33	4.49	4.28	4.26	4.39	4.14	
Maximum number of connectable indoor units			64							
Indoor index connection	Min.		100	125	150	175	200	225	250	
	Max.		260	325	390	455	520	585	650	
Dimensions	Unit	HeightxWidthxDepth	mm			1,685x930x765			1,685x1,240x765	
Weight	Unit		kg			213		296		319
Sound power level	Cooling	Nom.	dBA	78.3	78.8	82.5	78.7	83.7	83.4	87.9
Sound pressure level	Cooling	Nom.	dBA	56.3	58.0	60.8	58.1	61.4	63.0	67.0
Operation range	Cooling	Min.~Max.	°CDB						-5~-46	
	Heating	Min.~Max.	°CWB						-20~-16	
Refrigerant	Type/GWP					R-32/675.0				
	Charge	kg/TCO ₂ Eq	9.00/6.08						10.6/7.16	
Piping connections	Liquid	OD	mm	9.52		12.7				
	Gas	OD	mm	19.1		22.2			28.6	
	HP/LP gas	OD	mm	15.9		19.1			22.2	
	Total piping length	System Actual	m	1,000						
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415							
Current - 50Hz	Maximum fuse amps (MFA)	A	20	25	32	40		50		

Completely redesigned BSSV boxes for faster installation and easier servicing



REYA8-12A

Outdoor unit System		REYA	10A	13A	16A	18A	20A	22A	24A	26A	28A	
System	Outdoor unit module 1		REMA5A			REYA8A		REYA10A	REYA8A	REYA12A		
	Outdoor unit module 2		REMA5A	REYA8A		REYA10A	REYA12A		REYA16A	REYA14A	REYA16A	
Capacity range		HP	10	13	16	18	20	22	24	26	28	
Cooling capacity	Prated,c	kW	28.0	36.4	44.8	50.4	55.9	61.5	67.4	73.5	78.5	
Heating capacity	Prated,h	kW	28.0	36.4	44.8	50.4	55.9	61.5	67.4	73.5	78.5	
	Max. 6°CWB	kW	32.0	41.0	50.0	56.5	62.5	69.0	75.0	82.5	87.5	
Recommended combination			4 x FXFA63A2VEB	3 x FXFA50A2VEB + 3 x FXFA63A2VEB	4 x FXFA63A2VEB + 2 x FXFA80A2VEB	4 x FXFA50A2VEB + 4 x FXFA63A2VEB	10 x FXFA50A2VEB	6 x FXFA50A2VEB + 4 x FXFA63A2VEB	4 x FXFA50A2VEB + 4 x FXFA63A2VEB + 2 x FXFA80A2VEB	7 x FXFA50A2VEB + 5 x FXFA63A2VEB	6 x FXFA50A2VEB + 4 x FXFA63A2VEB + 2 x FXFA80A2VEB	
ηs,c		%	301.9	296.5	293.0	287.5	287.6	283.6	283.4	296.2	282.8	
ηs,h		%	160.6	161.5	170.9	170.5	172.2	173.3	165.2	172.0	171.5	
SEER			7.62	7.49	7.40	7.26	7.27	7.17	7.16	7.48	7.15	
SCOP			4.09	4.11	4.35	4.34	4.38	4.41	4.20	4.38	4.36	
Maximum number of connectable indoor units			64									
Indoor index connection	Min.		125	163	200	225	250	275	300	325	350	
	Max.		325	423	520	585	650	715	780	845	910	
Piping connections	Liquid	OD	mm	9.52	12.7						15.9	
	Gas	OD	mm	19.1	22.2						28.6	
	HP/LP gas	OD	mm	15.90	19.10						22.20	
	Total piping length	System	Actual	m	500						1,000	
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415									
Current - 50Hz	Maximum fuse amps (MFA)	A	40			50		63				
Outdoor unit module			REMA				5A					
Dimensions	Unit	HeightxWidthxDepth	mm									
			1,685x930x765									
Weight	Unit		kg									
			213									
Fan	External static pressure	Max.	Pa									
			78									
Sound power level	Cooling	Nom.	dB(A)									
			78.3									
Sound pressure level	Cooling	Nom.	dB(A)									
			56.3									
Operation range	Cooling	Min.~Max.	°CDB									
			-5~46									
Refrigerant	Heating	Min.~Max.	°CWB									
			-20~16									
Refrigerant	Type/GWP		R-32/675.0									
	Charge		kg									
			9.00/6.08									
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415									
Current - 50Hz	Maximum fuse amps (MFA)	A	20									


Actual number of connectable indoor units depends on the indoor unit type and the connection ratio restriction for the system (50% ≤ CR ≤ 130%) | Contains fluorinated greenhouse gases

Multi branch selector (BSSV) - for VRV 5 Heat Recovery


Completely redesigned for faster installation
and easier servicing

Easy installation thanks to

VRV 5: only 24 brazings point and no joint kits

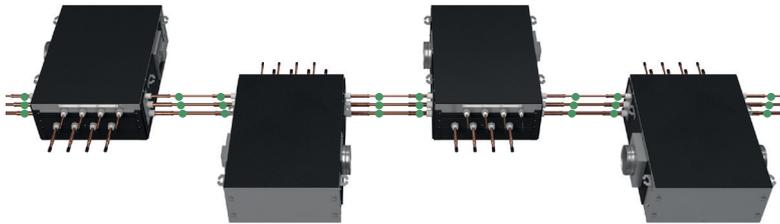


VRV IV: 39 brazing points and 3 joint kits

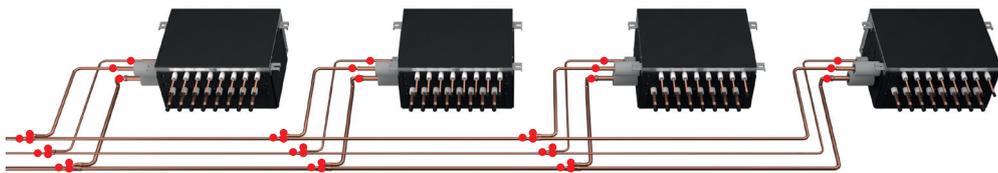

Easy servicing in false ceilings thanks to sliding down PCB



Limited ceiling void required as the box can be installed
at just 5mm from the ceiling

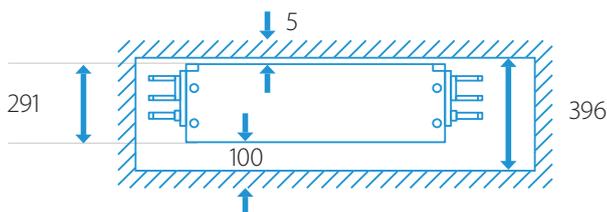

- Unique range of multi BS boxes allowing efficient 3-pipe heat recovery
- NEW** • No limitation on room size, thanks to Shîrudo Technology (1)
- NEW** • Faster installation thanks to Refrigerant Flow Through reducing the number of brazing points and joint kits
- NEW** • Easy servicing in false ceilings thanks to sliding down PCB
- NEW** • Limited ceiling void required as the box can be installed at just 5mm from the ceiling
- NEW** • Quick on-site settings, indication of service parameters and easy read out of errors thanks to 7 segment display
- Up to 16kW capacity available per port
- Connect up to 250 class unit (28kW) by combining 2 ports
- No limit on unused ports allowing phased installation
- Faster installation thanks to open port connection
- Allows multi tenant applications
- Connectable to REYA-A heat recovery units



More details and final information can be found by scanning or clicking the QR codes.

BS-A14AV1B

Branch selector		BS	4A14AV1B	6A14AV1B	8A14AV1B	10A14AV1B	12A14AV1B
Maximum number of connectable indoor units			20	30	40	50	60
Maximum number of connectable indoor units per branch					5		
Number of branches			4	6	8	10	12
Maximum capacity index of connectable indoor units			400	600		750	
Maximum capacity index of connectable indoor units per branch					140 (250 if 2 ports are combined)		
Dimensions	Unit	HeightxWidthxDepth	mm	291x600x845	291x1,000x845		291x1,400x845
Weight	Unit		kg	40	56	65	83
Casing	Material				Galvanised steel plate		
Piping connections	Outdoor unit or Refrigerant Flow Through	Liquid	Type		Brazing connection		
			OD	mm	9.52(2)/12.7(2)/15.9		
		Gas	Type		Brazing connection		
			OD	mm	15.9(2)/19.1(2)/22.2(2)/28.6		
	Indoor unit	Discharge gas	Type		Brazing connection		
			OD	mm	12.7(2)/15.9(2)/19.1(2)/22.2		
		Liquid	Type		Brazing connection		
			OD	mm	6.35(3)/9.52(4)		
Gas	Type		Brazing connection				
	OD	mm	9.52(5)/12.7(6)/15.9(4)				
	Drain			VP20 (I.D. 20/O.D. 26)			
BS units connected in Refrigerant Flow Through	Maximum allowed amount of BS units			4			
	Maximum total number of ports of BS units			16			
	Maximum total capacity index of indoor unit			750			
Sound absorbing thermal insulation			Urethane foam, polyethylene foam				
BS box system safety requirements	Dust connection diameter on unit		mm	160.0			
	Dust connection positions			Left/Right			
Power supply	Phase			1~			
	Frequency		Hz	50			
	Voltage		V	220-440			
	Maximum fuse amps (MFA)		A	15			

Contains fluorinated greenhouse gases | (1) Refer to Xpress selection software to ensure compliance to specific product standard.

VRV 5 Heat Pump

Daikin's solution for comfort & low energy consumption

- Reduced CO₂ equivalent thanks to the use of lower GWP R-32 refrigerant and lower refrigerant charge
- Single component refrigerant, easy to re-use and recycle
- Greatest sustainability over the entire lifecycle, thanks to market leading real-life seasonal efficiency
- Tackle small room applications without any additional measures, thanks to Shîrudo Technology
- Specially designed indoor units for R-32, ensuring low sound and maximum efficiency
- Like for like R-410A installation flexibility with piping lengths up to 165 meters and a total length of 1,000 meters
- Sound pressure down to 40 dB(A) thanks to 5 low sound steps
- ESP up to 78 Pa to allow ducting
- Wide operation range of up to +46°C in cooling and down to -20°C in heating
- Incorporates VRV standards & technologies: Variable Refrigerant Temperature, continuous heating, 7 segment display and full inverter compressors, 4-side heat exchanger, refrigerant cooled PCB



Wide piping flexibility to tackle any VRV application



5 low sound steps



Flexibility to take care of every room



More details and final information can be found by scanning or clicking the QR codes.

RXYA-A

Outdoor unit		RXYA	8A	10A	12A	14A	16A	18A	20A	
Capacity range		HP	8	10	12	14	16	18	20	
Cooling capacity	Prated,c	kW	22.4	28.0	33.5	40.0	45.0	50.4	56.0	
Heating capacity	Prated,h	kW	22.4	28.0	33.5	40.0	45.0	50.4	56.0	
	Max.	kW	25.0	31.5	37.5	45.0	50.0	56.5	63.0	
Recommended combination			4xFXFA50A2VEB	4xFXFA63A2VEB	6xFXFA50A2VEB	1xFXFA50A2VEB + 5xFXFA63A2VEB	4xFXFA63A2VEB + 2xFXFA80A2VEB	3xFXFA50A2VEB + 5xFXFA63A2VEB	8xFXFA63A2VEB	
η _{s,c}		%	287.3	279.3	278.7	302.2	276.6	271.6	257.6	
η _{s,h}		%	161.1	170.4	179.5	170.2	170.2	170.2	161.4	
SEER			7.26	7.06	7.04	7.67	6.99	6.87	6.52	
SCOP			4.11	4.33	4.49	4.28	4.26	4.39	4.14	
Maximum number of connectable indoor units									64	
Indoor index connection	Min.		100	125	150	175	200	225	250	
	Max.		260	325	390	455	520	585	650	
Dimensions	Unit	HeightxWidthxDepth	mm			1,685x1,240x765				
Weight	Unit		kg			297		320		
Sound power level	Cooling	Nom.	dBA	78.3	78.8	82.5	79.5	83.7	83.4	87.9
	Heating	Nom.	dBA	79.4	80.7	83.3	82.9	86.3	85.1	89.6
Sound pressure level	Cooling	Nom.	dBA	56.3	58.0	60.8	59.0	61.6	63.0	67.0
Operation range	Cooling	Min.~Max.	°CDB	-5 ~46						
	Heating	Min.~Max.	°CWB	-20 ~16						
Refrigerant	Type/GWP		R-32/675.0							
	Charge	kg/TCO _{Eq}	9.00/6.08			10.6/7.16				
Piping connections	Liquid	OD	mm			12.7				
	Gas	OD	mm			19.1		22.2		28.6
	Total piping length	System Actual	m							1,000
	Phase/Frequency/Voltage		Hz/V							3N~/50/380-415
Current - 50Hz	Maximum fuse amps (MFA)	A	20	25	32	40		50		



Outdoor unit System		RXYA	10A	13A	16A	18A	20A	
System	Outdoor unit module 1		RYMA5A			RXYA8A		
	Outdoor unit module 2		RYMA5A	RXYA8A		RXYA10A	RXYA12A	
Capacity range		HP	10	13	16	18	20	
Cooling capacity	Prated,c	kW	28	36.4	44.8	50.4	55.9	
Heating capacity	Prated,h	kW	28	36.4	44.8	50.4	55.9	
	Max.	kW	32	41	50	56.5	62.5	
Recommended combination			4xFXFA63A2VEB	3xFXFA50A2VEB + 3xFXFA63A2VEB	4xFXFA63A2VEB + 2xFXFA80A2VEB	4xFXFA50A2VEB + 4xFXFA63A2VEB	10xFXFA50A2VEB	
η _{s,c}		%	299.1%	293.8%	281.9%	284.1%	283.2%	
η _{s,h}		%	160.6%	161.5%	170.9%	170.5%	172.2%	
SEER			7.55	7.42	7.12	7.18	7.16	
SCOP			4.09	4.11	4.35	4.34	4.38	
Maximum number of connectable indoor units					64			
Indoor index connection	Min.		125	163	200	225	250	
	Max.		325	423	520	585	650	
Sound power level	Cooling	dB(A)	81.3	81.3	81.3	81.6	83.9	
Sound pressure level	Cooling	dB(A)	59.3	59.3	59.3	60.2	62.1	
Piping connections	Liquid	OD	mm	9.5	12.7	12.7	12.7	
	Gas	OD	mm	19.1	22.2	28.6	28.6	
	Equilizing pipe			19.1	19.1	19.1	19.1	
	Total piping System	Actual	m			500		
Power supply	Name				Y1			
	Phase/Frequency/Voltage	Hz/V			3N~/50/380-415			
Current - 50Hz	Maximum fuse amps (MFA)	A	40	40	40	50	50	
Outdoor unit		RXMA	5A					
Dimensions	Unit	HeightxWidthxDepth	mm	1,685x930x765				
Weight	Unit		kg	214				
Sound power level	Cooling	Nom.	dB(A)	78.3				
	Heating	Nom.	dB(A)	79.4				
Sound pressure level	Cooling	Nom.	dB(A)	56.3				
Operation range	Cooling	Min.~Max.	°CDB	-5 ~46				
	Heating	Min.~Max.	°CWB	-20 ~16				
Refrigerant	Type/GWP			R-32/675.0				
	Charge		kg/TCO _{Eq}	9.00/6.08				
Current - 50Hz	Phase/Frequency/Voltage	Hz/V		3N~/50/380-415				
	Maximum fuse amps (MFA)	A		20				

Actual number of connectable indoor units depends on the indoor unit type and the connection ratio restriction for the system (50% ≤ CR ≤ 130%) | Contains fluorinated greenhouse gases

VRV 5 S-series

Lower CO₂ equivalent and market-leading flexibility

- Reduced CO₂ equivalent thanks to the use of lower GWP R-32 refrigerant and lower refrigerant charge
- Top sustainability over the entire lifecycle, thanks to market leading real-life seasonal efficiency
- Low-height single fan range
- Easy to transport thanks to lightweight and compact design
- Wide access area to easily reach all key components
- Tackle small room applications without any additional measures, thanks to Shīrudo technology
- Specially designed indoor units for R-32, ensuring low sound and maximum efficiency



RXYSА-AV1_AY1



5 low sound steps



Flexibility to take care of every room



- 10 dB(A)!

Sound enclosure for VRV5 S-series

- Specially designed for RXYSА4-5-6AV1/AY1
- Fully optimized and tested in Daikin Factory
- Outdoor unit sound reduction up to -10 dB(A) on Sound Power values
- Very low capacity and pressure drop
- Fast & easy installation & servicing



More details and final information can be found by scanning or clicking the QR codes.

RXYSА-AV1



RXYSА-AY1




			4AV1	5AV1	6AV1	4AY1	5AY1	6AY1	8AY1	10AY1	12AY1	
Capacity range		HP	4	5	6	4	5	6	8	10	12	
Cooling capacity	Prated,c	kW	12.1	14.0	15.5	12.1	14.0	15.5	22.4	28.0	33.5	
	Prated,h	kW	12.1	14.0	15.5	12.1	14.0	15.5	22.4	28.0	33.5	
Heating capacity	Max.	kW	14.2	16.0	18.0	14.2	16.0	18.0	25.0	31.5	37.5	
Recommended combination			3x FXSA25A2VEB + 1x FXSA32A2VEB	4x FXSA32A2VEB	2x FXSA32A2VEB + 2x FXSA40A2VEB	3x FXSA25A2VEB + 1x FXSA32A2VEB	4x FXSA32A2VEB	2x FXSA32A2VEB + 2x FXSA40A2VEB	4x FXSA50A2VEB	4x FXSA63A2VEB	6x FXSA50A2VEB	
SEER			8.2	7.7	7.6	7.9	7.4	7.3	6.4	6.9	6.5	
SCOP			5.1	4.7	4.7	4.9	4.5	4.5	4.4	4.4	4.6	
ηs,c		%	324.5	306.1	301.0	312.5	294.8	289.9	251.4	274.2	255.8	
ηs,h		%	200.5	185.7	183.6	193.1	178.8	176.8	173.8	173.8	182.6	
Dimensions	HxWxD	mm	869x1,100x460						1,430x940x320		1,615x940x460	
Weight		kg	102						144		180	
Sound power level	Cooling	dB(A)	67.0	68.1	69.0	67.0	68.1	69.0	73.2	74.0	76.1	
	Heating	dB(A)	69.0	70.0	71.0	69.0	70.0	71.0	73.5	74.0	76.0	
Sound pressure level	Cooling	dB(A)	49.0	51.0			49.0	51.0		58.1	57.0	60.0
Operation range	Cooling	Min °C	-5 ~ 46						-5 ~ 52			
	Heating	Max °C	-20 ~ 16						-20 ~ 15.5			
Refrigerant	Type/GWP		R-32 / 675.0						R-32 / 675.0			
	Charge	tCO ₂ eq/ kg	3.40/2.30						5.2/3.51		7/4.73	
Piping connections	Liquid OD	mm	9.52						9.5		12.7	
	Gas OD	mm	15.9						19.1		22.2	
	H/P/LP gas OD	mm										
	Tot. pip. length	Sys. actual	300						300			
Power supply	Phase/Freq./ Voltage	Hz/V	1~/50/220-240			3N~/50/380-415			3N~/50/380-415			
Current - 50Hz	Max. fuse amps (MFA)	A	32			16			25		32	

Optional Shut off valve box (SV) for VRV 5 Heat Pump

To tackle even the most stringent applications in a future proof way

- For the vast majority of applications the factory integrated measures tackle the IEC requirements.
- In case of very small rooms an optional SV box ensures compliance to IEC60335-2-40 for any room.
- No limitation on room size
- Fast installation thanks to Refrigerant Flow through reducing the number of brazing points and joint kits
- Easy servicing in false ceilings thanks to sliding down PCB
- Limited ceiling void required as the box can be installed at just 5mm from the ceiling
- Connect up to 250 class unit (28kW) to 1-port SV box or by combing 2 ports on multi SV box
- Connectable to RXYA-A and RXYSA8-10-12AY1 units

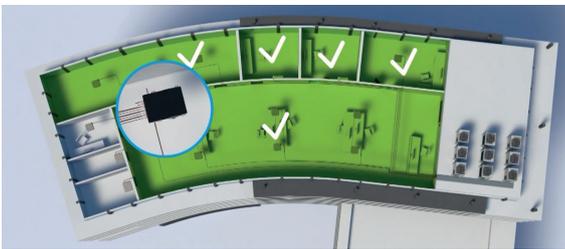

SV4A14A

Combination table

	RXYSA8-10-12AY1	RXYA-A
SV1A25A	Ⓟ	Ⓟ
SV4A14A	Ⓟ	Ⓟ
SV6A14A	Ⓟ	Ⓟ
SV8A14A	Ⓟ	Ⓟ



More details and final information can be found by scanning or clicking the QR codes.

SV-A

Branch selector		BS	SV1A25AJV1B	SV*A14AJV1B	
Maximum number of connectable indoor units			5	20	30
Maximum number of connectable indoor units per branch				5	40
Number of branches			1	4	6
Maximum capacity index of connectable indoor units			250	400	600
Maximum capacity index of connectable indoor units per branch			250		140
Dimensions	Unit	HeightxWidthxDepth	291x600x845		291x1,000x845
Piping connections	Outdoor unit or Refrigerant Flow Through	Liquid	Type	Brazing connection	
			OD	9.52 (1), 12.7 (1), 15.9	
		Gas	Type	Brazing connection	
		OD	15.9 (1), 19.1 (1), 22.2, 28.6 (1)		
	Indoor unit	Liquid	Type	Brazing connection	
			OD	6.35 (2), 9.52 (3)	
Gas		Type	Brazing connection		
	OD	9.52 (4), 12.7 (5), 15.9 (3)			
	Drain		VP20 (I.D. 20/O.D. 26)		
Units connected in Refrigerant Flow Through	Maximum allowed amount of BS/SV units.		4		
	Maximum total number of ports of BS/SV units		16		
	Maximum total capacity index of indoor unit		650		
Sound absorbing thermal insulation	Polyethylene foam				
Power supply	Phase		1~		
	Frequency		Hz		
	Voltage		V		
	Maximum fuse amps (MFA)		A		

Contains fluorinated greenhouse gases

VRV 5 - Technical benefits




7-segment display for quick and accurate error diagnostics

- Outdoor unit display for quick on-site settings and easy read out of errors
- Indication of service parameters for checking basic functions




Asymmetric fan design

- High ESP up to 78Pa to allow ducting
- Low sound levels down to 40 dB(A)




Refrigerant-cooled PCB

- Reliable cooling because it is not influenced by ambient air temperature
- Smaller switchbox for smoother air flow through the heat exchanger, increasing heat exchange efficiency by 5%



4-sided, 3-row heat exchanger

- Thanks to the large surface of the heat exchanger (up to 235m²) VRV units are compact, light and highly efficient



Unmatched piping flexibility

- Longest length up to 165m
- Total length 1,000m



New inverter compressor

- Specifically developed for R-32 refrigerant
- Back pressure control increasing efficiency in low load operation





New casing design with 4 handles for easy carrying



New asymmetric fan design

- Two high ESP settings
- Low sound levels



Compact dimensions

- Easy to transport thanks to compact size and single-fan design




Specially designed grille

- Low pressure drop
- No risk for accidental reach of the fan

Refrigerant cooled PCB

- With integrated:
 - cool/heat selector input
 - 7-segment display for quicker and more precise error and setting reading



Unique 3-row heat exchanger

- Contributes to top seasonal efficiency



New stop valves

- Repositioned to allow front or side connection
- Brazed for increased reliability



Unique Daikin swing compressor

- No abrasion possible
- No refrigerant leak possible
- High seasonal efficiencies



Indoor units

VRV 5 indoor unit benefit overview	p. 27
FXFA-A Round flow cassette	p. 28
FXZA-A Fully flat cassette	p. 30
NEW FXKA-A Ceiling mounted corner cassette	p. 31
BAE20A Auto cleaning filter for concealed ceiling units	p. 32
FXDA-A Slim concealed ceiling unit	p. 33
FXSA-A Concealed ceiling unit with medium ESP	p. 34
FXMA-A Concealed ceiling unit with high ESP	p. 35
FXAA-A Wall mounted unit	p. 36
FXHA-A Ceiling suspended unit	p. 37
FXUA-A 4-way blow ceiling suspended unit	p. 38
NEW CYA-DK-F/C/R Biddle air curtains	p. 40

VRV 5 indoor unit overview

Capacity class (kW)

Type	Model	Product name	10	15	20	25	32	40	50	63	71	80	100	125	140	200	250		
Ceiling mounted cassette	UNIQUE Round flow cassette	360° air discharge for optimum efficiency and comfort > Auto cleaning function ensures high efficiency > Intelligent sensors save energy and maximize comfort > Flexibility to suit every room layout > Lowest installation height in the market! > Widest choice ever in decoration panel designs and colors 			●	●	●	●	●	●		●	●	●				●	
	UNIQUE Fully flat cassette	Unique design that integrates fully flat into the ceiling > Perfect integration in standard architectural ceiling tiles > Blend of iconic design and engineering excellence > Intelligent sensors save energy and maximize comfort > Small capacity unit developed for small or well-insulated rooms > Flexibility to suit every room layout			●	●	●	●	●	●									
	NEW 1-way blow cassette	1-way blow unit for corner installation > Compact dimensions enable installation in narrow ceiling voids > Flexible installation thanks to different air discharge options > New modern decoration panel				●	●	●	●	●									●
Concealed ceiling	Slim concealed ceiling unit	Slim design for flexible installation > Compact dimensions enable installation in narrow ceiling voids > Medium external static pressure up to 44Pa > Only grilles are visible > Small capacity unit developed for small of well-insulated rooms > Reduced energy consumption thanks to DC fan motor		●	●	●	●	●	●	●									
	Concealed ceiling unit with medium ESP	Slimmest yet most powerful medium static pressure unit on the market! > Slimmest unit in class, only 245mm > Low operating sound level > Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths > Automatic air flow adjustment function measures the air volume and static pressure and adjusts it towards the nominal air flow, guaranteeing comfort			●	●	●	●	●	●			●	●	●	●			
	Concealed ceiling unit with high ESP	ESP up to 270 Pa, ideal for extra large sized spaces > Optimum comfort guaranteed no matter the length of ductwork or type of grilles, thanks to automatic air flow adjustment > Large capacity unit: up to 31.5 kW heating capacity											●	●	●	●	●	●	
	Wall mounted unit	For rooms with no false ceilings nor free floor space > Flat, stylish front panel is more easy to clean > Small capacity unit developed for small of well-insulated rooms > Reduced energy consumption thanks to DC fan motor > The air is comfortably spread up- and downwards thanks to 5 different discharge angles			●	●	●	●	●	●									
	Ceiling suspended unit	For wide rooms with no false ceilings nor free floor space > Ideal for comfortable air flow in wide rooms thanks to Coanda effect > Rooms with ceilings up to 3.8m can be heated or cooled very easily! > Can easily be installed in both new and refurbishment projects > Can even be mounted in corners or narrow spaces without any problem						●		●			●						
UNIQUE 4-way blow ceiling suspended unit	Unique Daikin unit for high rooms with no false ceilings nor free floor space > Rooms with ceilings up to 3.5m can be heated up or cooled down very easily! > Can easily be installed in both new and refurbishment projects > Flexibility to suit every room layout								●		●		●						
Cooling capacity (kW)⁽¹⁾				1.1	1.7	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	11.2	14.0	16.0	22.4	28.0	
Heating capacity (kW)⁽²⁾				1.3	1.9	2.5	3.2	4.0	5.0	6.3	8.0	9.0	10.0	12.5	16.0	18.0	25.0	31.5	

UV Streamer kit


Available summer '24

Auto cleaning filter option

(1) Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m
 (2) Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m

Biddle air curtains **NEW**

Type	Product name	Model
Free-hanging	CYA-S/M/L-DK-F	 <p>Easy wall mounted installation > Connectable to ERQ and VRV units > Unified range for R-32 and R-410A refrigerant > Payback period of less than 1.5 years compared to installing an electric air curtain</p>
Cassette	CYA-S/M/L-DK-C	 <p>Mounted into a false ceiling leaving only the decoration panel visible > Connectable to ERQ and VRV units > Unified range for R-32 and R-410A refrigerant > Payback period of less than 1.5 years compared to installing an electric air curtain</p>
Recessed	CYA-S/M/L-DK-R	 <p>Neatly concealed in the ceiling > Connectable to ERQ and VRV units > Unified range for R-32 and R-410A refrigerant > Payback period of less than 1.5 years compared to installing an electric air curtain</p>

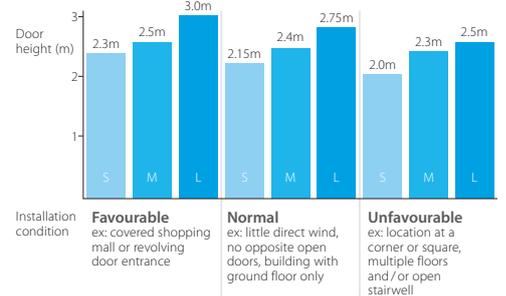




Round flow cassette



4-way blow ceiling suspended unit

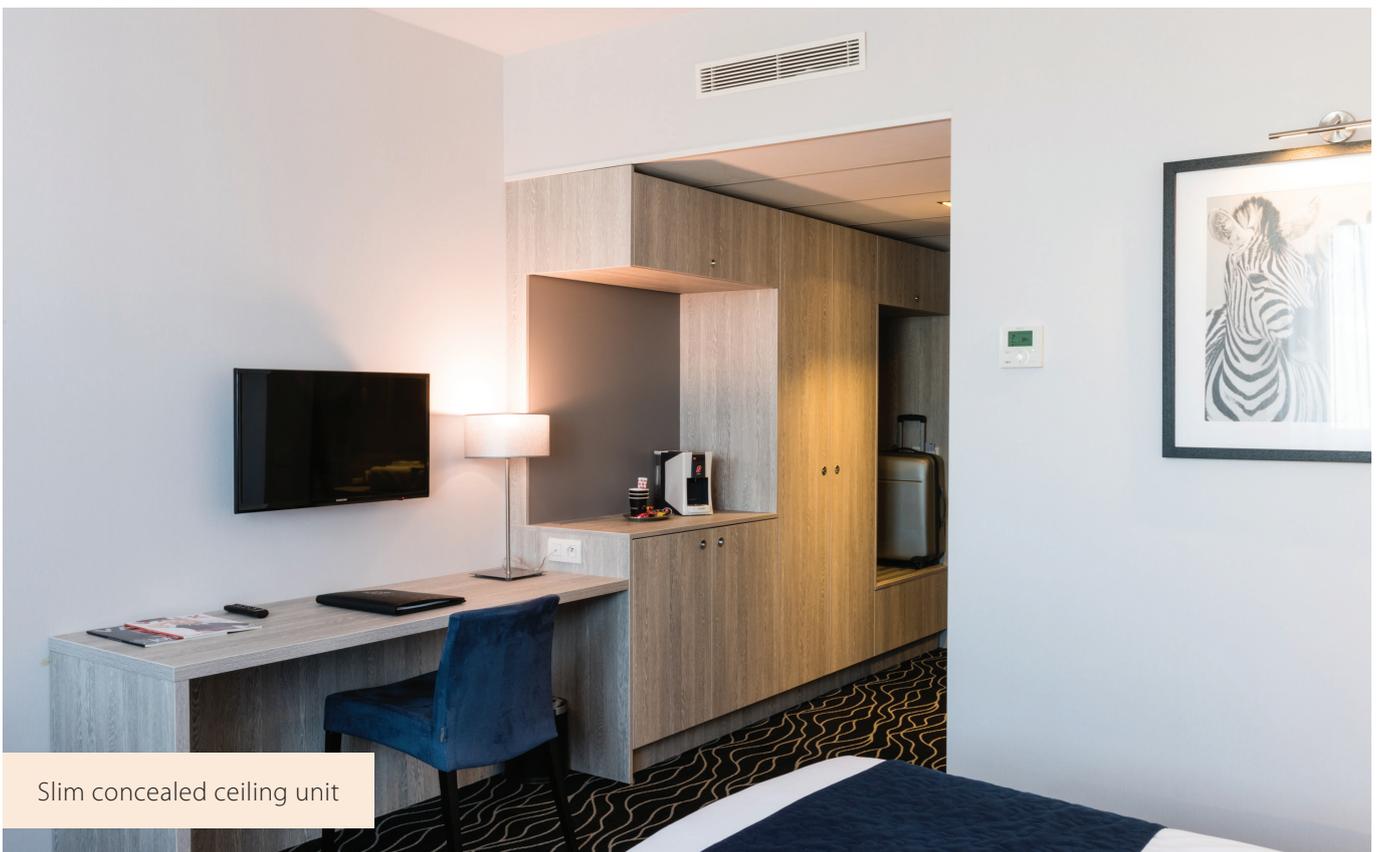

Slim concealed ceiling unit

VRV 5 indoor unit benefit overview

			Ceiling mounted cassette units			Concealed ceiling units			Wall mounted unit	Ceiling suspended units	
			FXFA-A	FXZA-A	FXKA-A	FXDA-A	FXSA-A	FXMA-A	FXAA-A	FXHA-A	FXUA-A

We care		Home leave operation	Maintains the indoor temperature at your specified comfort level during absence, thus saving energy.	●	●	●	●	●	●	●	●	
		Fan only	The unit can be used as fan, blowing air without heating or cooling.	●	●	●	●	●	●	●	●	
		Auto cleaning filter	The filter automatically cleans itself. Simplicity of upkeep means optimum energy efficiency and maximum comfort without the need for expensive or time-consuming maintenance.	○			○					
		Floor and presence sensor	The presence sensor directs the air away from any person detected in the room, when the air flow control is on. The floor sensor detects the average floor temperature and ensures an even temperature distribution between ceiling and floor.	○	○						● NEW	
Comfort		Draught prevention	When starting to warm up or when the thermostat is off, the air discharge direction is set horizontally and the fan to low speed, to prevent draught. After warming up, air discharge and fan speed are set as desired.	●	●	●					●	
		Whisper quiet	Daikin indoor units are whisper quiet. Also the outdoor units are guaranteed not to disturb the quiet of the neighbourhood.	●	●		●	●	●		●	
		Auto cooling-heating changeover	Automatically selects cooling or heating mode to achieve the set temperature.	●	●	●	●	●	●	●	●	
Air treatment		UV Streamer kit	Purifies the air of pollutants such as viruses, bacteria, fine dust (PM1.0), odours, allergens, etc ensuring a healthy and hygienic indoor environment	●								
		Air filter	Removes airborne dust particles to ensure a steady supply of clean air.	○ (2) <small>(Optional high efficiency filter ePM10 60%)</small>	● (2)	● (2)	● (2)	● (2)	● (2)	● (2)	● (2)	
Humidity control		Dry programme	Allows humidity levels to be reduced without variations in room temperature.	●	●	●	●	●	●	●	●	
Air flow		Ceiling soiling prevention	Prevents air from blowing out too long in horizontal position, to prevent ceiling stains.	●	●	●						
		Vertical auto swing	Possibility to select automatic vertical moving of the air discharge flaps for efficient air and temperature distribution throughout the room.	●	●	●			●	●	●	
		Fan speed steps	Allows to select up to the given number of fan speed.	5 + auto	3 + auto	3 + auto	3	3 + auto	3 (50-125) 3 + auto (200-250)	3 + auto	3	3 + auto
		Individual flap control	Individual flap control via the wired remote controller enables you to easily fix the position of each flap individually, to suit any new room configuration. Optional closure kits are available as well.	●	●							●
Remote control & timer		Onecta controller (BRP069CS1)	Control your indoor climate from any location via smartphone or tablet.	○	○	○	○	○	○	○	○	
		Weekly timer	Can be set to start heating or cooling anytime on a daily or weekly basis.	○	○	○	○	○	○	○	○	
		Infrared remote control	Starts, stops and regulates the air conditioner from a distance.	○ (1)	○ (1)		○ (1)	○ (1)	○ (1)	○ (1)	○ (1)	
		Wired remote control	Starts, stops and regulates the air conditioner.	● (3)	● (3)	● (3)	● (3)	● (3)	● (3)	● (3)	● (3)	
		Centralised control	Starts, stops and regulates several air conditioners from one central point.	○	○	○	○	○	○	○	○	
Other functions		Auto-restart	The unit restarts automatically at the original settings after power failure.	●	●	●	●	●	●	●	●	
		Self-diagnosis	Simplifies maintenance by indicating system faults or operating anomalies.	●	●	●	●	●	●	●	●	
		Drain pump kit	Facilitates condensation draining from the indoor unit.	●	●	●	●	●	○	○	●	
		Multi tenant	The indoor unit's main power supply can be turned off when leaving the hotel or office building.	○ (4)	○ (4)	○ (4)	○ (4)	○ (4)	○ (4)	○ (4)	○ (4)	

(1) Must be combined with Madoka wired remote controller.

(3) BRC1H52W/S/K is a required option

● standard ○ optional

(2) Pre filter

(4) Only in combination with REYA outdoors



Complete indoor comfort, including pure air

- Maximum comfort thanks to 360° air discharge and intelligent sensors
- Widest ever choice in panels to match any interior



presence sensor

floor sensor



Black auto cleaning panel Black designer panel Full white standard panel White designer panel

- Auto cleaning panel keeps the filter free of dust for maximum efficiency



- NEW** • UV streamer kit
 - Purifies the air of pollutants such as viruses, bacteria, fine dust PM1, odours, allergens, etc ensuring a healthy and hygienic indoor environment
 - Unique catch & clean approach includes an ISO ePM1 60% (F7) filter, UV-C light and Streamer technology
 - Can be retrofitted into existing installations



99.9%

of viruses removed in 30 minutes, thanks to Daikin's unique

Catch & Clean approach

Tested at Intertek

Results based on tests performed in the laboratories of Intertek, in a 28m³ room. Daikin's Round flow cassette (FXFQ125B) removes more than 99.9% of enveloped viruses such as Corona viruses.

* Additional details regarding this function can be found in the unit technical manual.



28m³

Tested according to real life sized room





View full test report:



Round flow cassette

360° air discharge for optimum efficiency and comfort

- Optimised design for R-32 refrigerant
- Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs.
- Two optional intelligent sensors improve energy efficiency and comfort
- Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- Bigger flaps and unique swing pattern improve equal air distribution
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- Lowest installation height in the market: 214mm for class 20-63
- **NEW** UV streamer kit, purifies the air of pollutants such as viruses, bacteria, fine dust (PM1.0), odours, allergens, etc ensuring a healthy and hygienic indoor environment
- Optional fresh air intake
- Standard drain pump with 675mm lift increases flexibility and installation speed

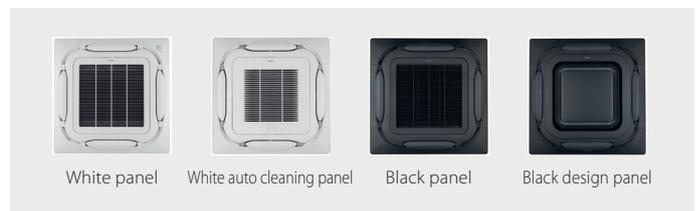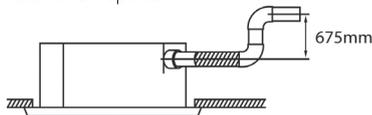

More details and final information can be found by scanning or clicking the QR codes.





Indoor Unit			FXFA	20A	25A	32A	40A	50A	63A	80A	100A	125A	
Cooling capacity	Total capacity	At high fan speed	kW	2.20	2.80	3.60	4.50	5.60	7.10	9.00	11.20	14.00	
	Heating capacity	At high fan speed	kW	2.50	3.20	4.00	5.00	6.30	8.00	10.00	12.50	16.00	
Power input - 50Hz	Cooling	At high fan speed	kW	0.017			0.018	0.023	0.028	0.045	0.078	0.103	
	Heating	At high fan speed	kW	0.017			0.018	0.023	0.028	0.045	0.078	0.103	
Dimensions	Unit	HeightxWidthxDepth	mm	204x840x840						246x840x840		288x840x840	
Weight	Unit		kg	18		19		21		24		26	
Casing	Material			Galvanised steel plate									
Decoration panel	Model			Standard panels: BYCQ140E2W1 - white with grey louvers / BYCQ140E2W1W - full white / BYCQ140E2W1B - black Auto cleaning panels: BYCQ140E2GFW1 - white / BYCQ140E2GFW1B - black Designer panels: BYCQ140E2P - white / BYCQ140E2PB - black									
	Dimensions	HeightxWidthxDepth	mm	Standard panels: 65x950x950 / Auto cleaning panels: 148x950x950 / Designer panels: 106x950x950									
Fan	Weight		kg	Standard panels: 5.5 / Auto cleaning panels: 10.3 / Designer panels: 6.5									
	Air flow rate - 50Hz	Cooling	At high / medium high / medium / medium low / low fan speed	m ³ /min	12.8/11.8/10.7/9.8/8.9			14.8/13.7/12.6/11.5/10.4	15.1/14.0/12.8/11.8/10.7	16.6/15.0/13.3/12.0/10.7	23.3/21.7/19.3/16.5/13.8	28.8/25.1/21.2/17.5/13.8	33.0/30.2/27.4/24.0/20.6
	Heating	At high / medium high / medium / medium low / low fan speed	m ³ /min	12.8/11.8/10.7/9.8/8.9			14.8/13.7/12.6/11.5/10.4	15.1/14.0/12.8/11.8/10.7	16.6/15.0/13.3/12.0/10.7	23.3/21.7/19.3/16.5/13.8	29.0/25.1/21.2/17.5/13.8	33.0/30.2/27.4/24.0/20.6	
Air filter	Type			Resinnet									
Sound power level	Cooling	At high fan speed	dB(A)	49.0			51.0		53.0	55.0	60.0	61.0	
Sound pressure level	Cooling	At high / medium high / medium / medium low / low fan speed	dB(A)	31.0/30.0/29.0/29.5/28.0			33.0/32.0/31.0/30.0/29.0		35.0/34.0/33.0/32.0/30.0	38.0/36.0/34.0/32.0/30.0	43.0/41.0/37.0/34.0/30.0	45.0/43.0/41.0/39.0/36.0	
	Heating	At high / medium high / medium / medium low / low fan speed	dB(A)	31.0/30.0/29.0/29.5/28.0			33.0/32.0/31.0/30.0/29.0		35.0/34.0/33.0/32.0/30.0	38.0/36.0/34.0/32.0/30.0	43.0/41.0/37.0/34.0/30.0	45.0/43.0/41.0/39.0/36.0	
Refrigerant	Type/GWP			R-32/675.0									
Piping connections	Liquid	OD	mm	6.35						9.52			
	Gas	OD	mm	9.52			12.70			15.90			
	Drain			VP25 (O.D. 32 / I.D. 25)									
Power supply	Phase/Frequency/Voltage			1~/50/60/220-240/220									
Current - 50Hz	Maximum fuse amps (MFA)		A	6									
Control systems	Infrared remote control			BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB									
	Wired remote control			BRC1H52W/S/K									

Contains fluorinated greenhouse gases

Fully flat cassette

Unique design in the market that integrates fully flat into the ceiling

- Optimised design for R-32 refrigerant
- Fully flat integration in standard architectural ceiling tiles, leaving only 8mm
- Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- Two optional intelligent sensors improve energy efficiency and comfort
- 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- Optional fresh air intake
- Standard drain pump with 630mm lift increases flexibility and installation speed

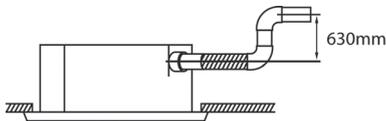

More details and final information can be found by scanning or clicking the QR codes.

FXZA-A

Indoor Unit				FXZA	15A	20A	25A	32A	40A	50A
Cooling capacity	Total capacity	At high fan speed		kW	1.70	2.20	2.80	3.60	4.50	5.60
		At low fan speed		kW						
Heating capacity	Total capacity	At high fan speed		kW	1.90	2.50	3.20	4.00	5.00	6.30
		At low fan speed		kW						
Power input - 50Hz	Cooling	At high fan speed		kW	0.018		0.020	0.019	0.029	0.048
		At low fan speed		kW	0.018		0.020	0.019	0.029	0.048
Dimensions	Unit	HeightxWidthxDepth		mm	260x575x575					
Weight	Unit			kg	15.5		16.5		18.5	
Casing	Material	Galvanised steel plate								
Decoration panel	Model	BYFQ60C4W1W								
	Colour	White (N9.5)								
	Dimensions	HeightxWidthxDepth		mm	46x620x620					
	Weight	kg								
Decoration panel 2	Model	BYFQ60C4W1S								
	Colour	SILVER								
	Dimensions	HeightxWidthxDepth		mm	46x620x620					
	Weight	kg								
Decoration panel 3	Model	BYFQ60B3W1 + wire harness EKRS23								
	Colour	WHITE (RAL9010)								
	Dimensions	HeightxWidthxDepth		mm	55x700x700					
	Weight	kg								
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m ³ /min	8.5/7.0/6.5	8.7/7.5/6.5	9.0/8.0/6.5	10.0/8.5/7.0	11.5/9.5/8.0	14.0/12.5/10.0
			At high / medium / low fan speed	m ³ /min	8.5/7.0/6.5	8.7/7.5/6.5	9.0/8.0/6.5	10.0/8.5/7.0	11.5/9.5/8.0	14.0/12.5/10.0
Air filter	Type	Resin net								
Sound power level	Cooling	At high fan speed		dBA	49		50	51	54	60
		At low fan speed		dBA						
Sound pressure level	Cooling	At high / medium / low fan speed		dBA	31.5/28.0/25.5	32.0/29.5/25.5	33.0/30.0/25.5	33.5/30.0/26.0	37.0/32.0/28.0	43.0/40.0/33.0
		At high / medium / low fan speed		dBA	31.5/28.0/25.5	32.0/29.5/25.5	33.0/30.0/25.5	33.5/30.0/26.0	37.0/32.0/28.0	43.0/40.0/33.0
Refrigerant	Type/GWP	R-32/675.0								
Piping connections	Liquid	OD	mm		6.35					
	Gas	OD	mm		9.52		12.70			
	Drain	VP20 (I.D. 20/O.D. 26)								
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/60/220-240/220						
Current - 50Hz	Maximum fuse amps (MFA)	A		6						
Control systems	Infrared remote control	BRC7F530W (white panel) / BRC7F530S (grey panel) / BRC7EB530W (standard panel) (1)								
Control systems	Wired remote control	BRC1H52W/S/K								

Dimensions do not include control box | (1) Must be combined with Madoka wired remote controller | Contains fluorinated greenhouse gases

Ceiling mounted corner cassette

1-way blow unit for corner installation

- Optimised design for R-32 refrigerant
- Compact dimensions enable installation in narrow ceiling voids (only 200mm height)
- NEW • New modern decoration panel
- NEW • The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control
- Optional fresh air intake
- Standard drain pump increases flexibility and installation speed

New design!



More details and final information can be found by scanning or clicking the QR codes.

FXKA-A

Indoor Unit		FXKA		20	25	32	40	50	63
Cooling capacity	Total capacity	At high fan speed	kW	2.2	2.8	3.6	4.5	5.6	7.1
	Heating capacity	Total capacity	At high fan speed	kW	2.5	3.2	4	5	6.3
Power input - 50Hz	Cooling	At high fan speed	kW	0.024	0.024	0.033	0.038	0.055	0.118
	Heating	At high fan speed	kW	0.024	0.024	0.033	0.038	0.055	0.118
Dimensions	Unit	HeightxWidthxDepth	mm	200x840x470			200x1.240x470		
Weight	Unit		kg	17	17	18	23	23	23
Casing	Material	Galvanised steel plate							
Decoration panel	Model				BYK32G			BYK63G	
	Dimensions	HeightxWidthxDepth	mm	80x950x550			80x1.350x550		
Fan	Weight	kg							
	Airflow rate	Cooling	At high / medium / low fan speed	m³/min	7.1/6/5		8.5/7.3/6	12.9/11/9.1	15.5/13.2/11
Air filter	Type	Resin net							
Sound power level	Cooling	At high fan speed	dB(A)	52	53	54	56	58	68
Sound pressure level	Cooling	At high / medium / low fan speed	dB(A)	36/33/30	37/34/31	38/35/32	40/37/34	42/40/37	54/51/48
	Heating	At high / medium / low fan speed	dB(A)	38/35/32	39/36/33	40/37/34	42/39/36	44/42/39	55/52/49
Refrigerant	Type/GWP	R-32/675							
Piping connections	Liquid	OD	mm	6.35					
	Gas	OD	mm	9.52				12.7	
	Drain	VP25 (O.D. 32/I.D. 25)							
Power supply			Hz/V	1~/50/60/220-240/220					
Current - 50Hz	Maximum fuse amps (MFA)		A	6					

Contains fluorinated greenhouse gases

Blue cells contain preliminary Data





Auto cleaning filter for concealed ceiling units

The unique automatic cleaning filter achieves higher efficiency and comfort with lower maintenance costs

Reduce running costs

- Automatic filter cleaning ensures low maintenance costs because the filter is always clean

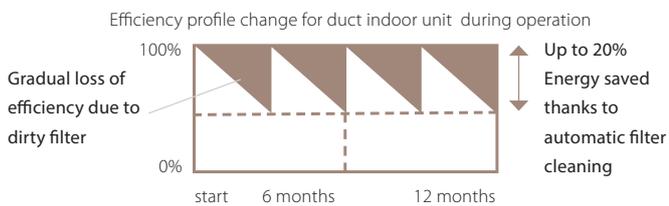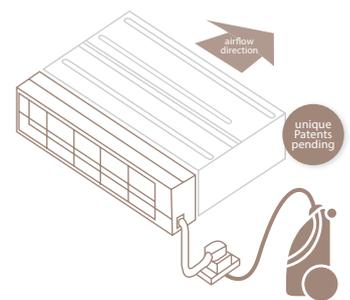

Minimal time required for filter cleaning

- The dust box can be emptied with a vacuum cleaner for fast and easy cleaning
- No more dirty ceilings

Improved indoor air quality

- Optimum airflow eliminates draft and insulates sound

Superb reliability

- Prevents clogged filters for seamless operation

Unique technology

- Unique and innovative filter technology inspired by the Daikin auto cleaning cassette



How does it work?

- Scheduled automatic filter cleaning
- Dust collects in a dust box that's integrated into the unit
- The dust can easily be removed with a vacuum cleaner



Combination table

	Split / Sky Air				VRV						
	FDXM-F9				FXDA-A/FXDQ-A3						
	25	35	50	60	15	20	25	32	40	50	63
BAE20A62	•	•			•	•	•	•			
BAE20A82									•	•	
BAE20A102			•	•							•

Specifications


	BAE20A62	BAE20A82	BAE20A102
Height (mm)	210		
Width (mm)	830	1,030	1,230
Depth (mm)	188		

Slim concealed ceiling unit


Slim design for flexible installation

- Optimised design for R-32 refrigerant
- 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- Compact dimensions, can easily be mounted in a ceiling void of only 240mm



SERIE A (15, 20, 25, 32)

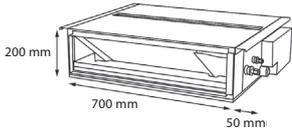

- Medium external static pressure up to 44Pa facilitates unit use with flexible ducts of varying lengths
- Discretely concealed in the wall: only the suction and discharge grilles are visible
- Optional auto cleaning filter option ensures maximum efficiency, comfort and reliability by regular filter cleaning
- Flexible installation, as the air suction direction can be altered from rear to bottom suction

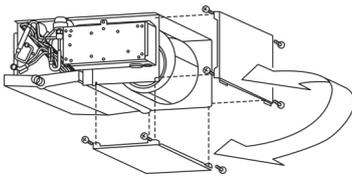

- Standard drain pump with 600mm lift increases flexibility and installation speed

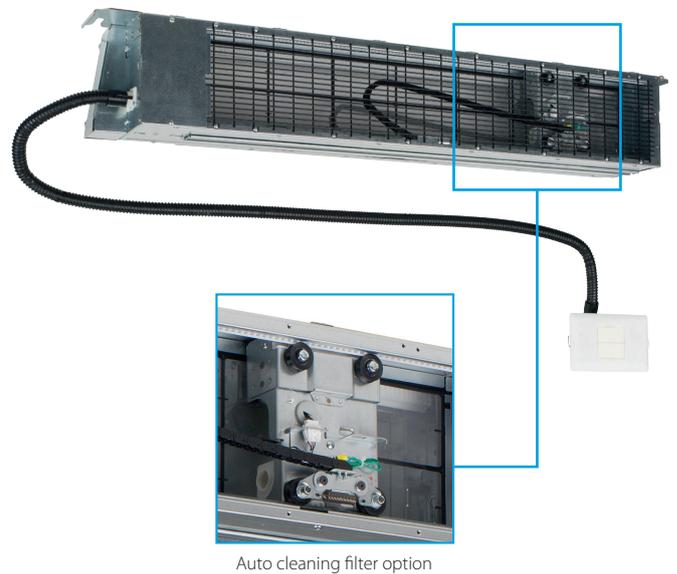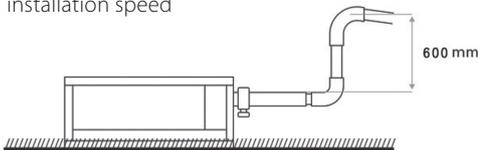

Auto cleaning filter option



More details and final information can be found by scanning or clicking the QR codes.

FXDA-A

Indoor Unit				FXDA	10A	15A	20A	25A	32A	40A	50A	63A
Cooling capacity	Total capacity	At high fan speed	kW	1.10	1.70	2.20	2.80	3.60	4.50	5.60	7.10	
Heating capacity	Total capacity	At high fan speed	kW	1.30	1.90	2.50	3.20	4.00	5.00	6.30	8.00	
Power input - 50Hz	Cooling	At high fan speed	kW	0.026	0.035		0.030	0.035	0.038	0.049	0.058	
	Heating	At high fan speed	kW	0.026	0.035		0.030	0.035	0.038	0.049	0.058	
Required ceiling void >			mm	240								
Dimensions	Unit	HeightxWidthxDepth	mm	200x750x620				230	200x950x620		200x1,150x620	
Weight	Unit		kg	22.0				23.0	26.5		30.5	
Casing	Material			Galvanised steel								
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m ³ /min	5.2/4.9/4.7	6.5/6.2/5.8		8.0/7.2/6.4		10.5/9.5/8.5	12.5/11.0/10.0	16.5/14.5/13.0
		Heating	At high / medium / low fan speed	m ³ /min	5.2/4.9/4.7	6.5/6.2/5.8		8.0/7.2/6.4		10.5/9.5/8.5	12.5/11.0/10.0	16.5/14.5/13.0
	External static pressure - 50Hz	Factory set / High	Pa				10/30			15/44		
Air filter	Type			Removable / washable								
Sound power level	Cooling	At high fan speed	dBA	48	50		51		52	53	54	
		At high / medium / low fan speed	dBA	29.0/28.0/26.0	32.0/31.0/27.0		33.0/31.0/27.0		34.0/32.0/28.0	35.0/33.0/29.0	36.0/34.0/30.0	
Sound pressure level	Heating	At high / medium / low fan speed	dBA	29.0/28.0/26.0	32.0/31.0/27.0		33.0/31.0/27.0		34.0/32.0/28.0	35.0/33.0/29.0	36.0/34.0/30.0	
Refrigerant	Type/GWP			R-32/675.0								
Piping connections	Liquid	OD	mm	6								
		Gas	OD	mm	9.52				12.70			
	Drain			VP20 (I.D. 20/O.D. 26)								
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/60/220-240/220								
Current - 50Hz	Maximum fuse amps (MFA)	A		6								
	Infrared remote control			BRC4C65 (1)								
Control systems	Wired remote control			BRC1H52W/S/K								

(1) Must be combined with Madoka wired remote controller | Contains fluorinated greenhouse gases


Concealed ceiling unit with medium ESP

Slimmest yet most powerful medium static pressure unit on the market

- Optimised design for R-32 refrigerant
- Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge





- Quiet operation: down to 25dBA sound pressure level
- Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- Discretely concealed in the wall: only the suction and discharge grilles are visible
- 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- Optional fresh air intake
- Fresh air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required
- Standard built-in drain pump with 625mm lift increases flexibility and installation speed

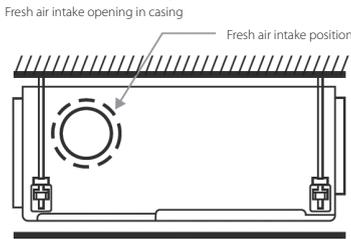

* Brings in up to 10% of fresh air into the room

- Standard built-in drain pump with 625mm lift increases flexibility and installation speed

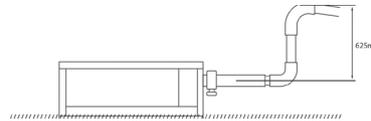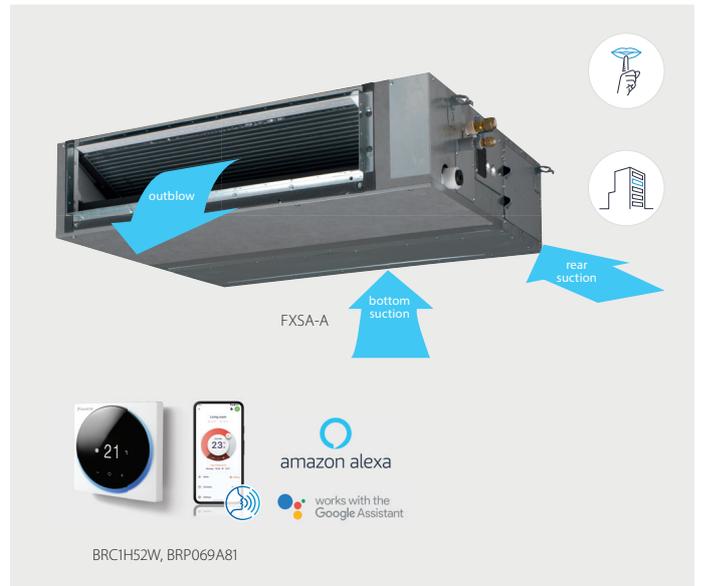


Automatic Airflow

Adjustment function

Automatically selects the most appropriate fan curve to achieve the unit's nominal air flow within ±10%

Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance * the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature
Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster

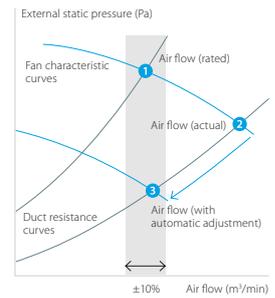

More details and final information can be found by scanning or clicking the QR codes.

FXSA-A



Indoor Unit			FXSA	15A	20A	25A	32A	40A	50A	63A	80A	100A	125A	140A	
Cooling capacity	Total capacity	At high fan speed	kW	1.70	2.20	2.80	3.60	4.50	5.60	7.10	9.00	11.20	14.00	16.00	
	Heating capacity	Total capacity	At high fan speed	kW	1.90	2.50	3.20	4.00	5.00	6.30	8.00	10.00	12.50	16.00	18.00
Power input - 50Hz	Cooling	At high fan speed	kW	0.046			0.049	0.094	0.096	0.106	0.143	0.176	0.216	0.272	
	Heating	At high fan speed	kW	0.046			0.049	0.094	0.096	0.106	0.143	0.176	0.216	0.272	
Dimensions	Unit	HeightxWidthxDepth	mm	245x550x800			245x700x800			245x1,000x800			245x1,400x800		245x1,550x800
Weight	Unit		kg	23.5			24.0	28.5	29.0	35.5	36.5	46.0	47.0	51.0	
Casing	Material			Galvanised steel plate											
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m³/min	8.7/7.5/6.5	9.0/7.5/6.5	9.5/8.0/7.0	15.0/12.5/11.0	15.2/12.5/11.0	21.0/18.0/15.0	23.0/19.5/16.0	32.0/27.0/23.0	36.0/31.5/26.0	39.0/34.0/28.0	
		Heating	At high / medium / low fan speed	m³/min	8.7/7.5/6.5	9.0/7.5/6.5	9.5/8.0/7.0	15.0/12.5/11.0	15.2/12.5/11.0	21.0/18.0/15.0	23.0/19.5/16.0	32.0/27.0/23.0	36.0/31.5/26.0	42.5/34.0/28.0	
	External static pressure - 50Hz	Factory set / High	Pa	30/150			40/150			50/150					
Air filter	Type			Resin net											
Sound power level	Cooling	At high fan speed	dBA	54			55	60	59	61	64				
	Heating	At high / medium / low fan speed	dBA	29.5/28.0/25.0	30.0/28.0/25.0	31.0/29.0/26.0	35.0/32.0/29.0	33.0/30.0/27.0	35.0/32.0/29.0	37.0/34.0/31.0	37.0/34.0/31.0	40.0/37.0/33.0	41.5/38.0/34.0		
Refrigerant	Type/GWP			R-32/675.0											
	Piping connections	Liquid OD	mm	6.35			9.52			15.90					
	Gas OD	mm	9.52			12.70			15.90						
	Drain			VP20 (I.D. 20/O.D. 26), drain height 625 mm											
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220											
Current - 50Hz	Maximum fuse amps (MFA)		A	6											
Control systems	Infrared remote control			BRC4C65 / BRC4C66 (1)											
	Wired remote control			BRC1H52W/S/K											


(1) Must be combined with Madoka wired remote controller | Contains fluorinated greenhouse gases

Concealed ceiling unit with high ESP

Ideal for large sized spaces ESP up to 250 Pa


- Optimised design for R-32 refrigerant
- High external static pressure up to 250Pa facilitates extensive duct and grille network
- Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- Discretely concealed in the wall: only the suction and discharge grilles are visible
- Fresh air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required (50-125 class)

Fresh air intake opening in casing

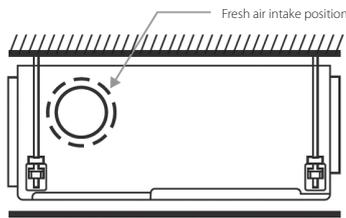


* Brings in up to 10% of fresh air into the room

- Flexible installation, as the air suction direction can be altered from rear to bottom suction (50-125 class)

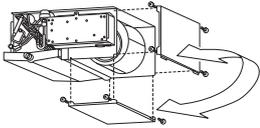

- Standard built-in drain pump with 625mm lift increases flexibility and installation speed (optional for 200-250)

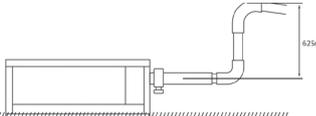

- Large capacity unit: up to 31.5 kW heating capacity




Automatic Airflow Adjustment function

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within ±10%

Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance * the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature
Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster

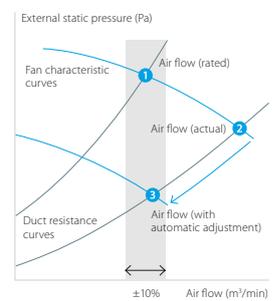

More details and final information can be found by scanning or clicking the QR codes.

FXMA-A

Indoor Unit				FXMA	50A	63A	80A	100A	125A	200A	250A
Cooling capacity	Total capacity	At high fan speed	kW	5.6	7.1	9.0	11.2	14.0	22.4	28.0	
		Nom.	kW						22.4	28.0	
Heating capacity	Total capacity	At high fan speed	kW	6.3	8.0	10.0	12.5	16.0	25.0	31.5	
		Nom.	kW						25.0	31.5	
Power input - 50Hz	Cooling	At high fan speed	kW	0.125	0.140	0.198	0.191	0.254	0.54	0.65	
	Heating	At high fan speed	kW	0.125	0.140	0.198	0.191	0.254	0.54	0.65	
Required ceiling void >			mm	350							
Dimensions	Unit	HeightxWidthxDepth	mm	300x1,000x700			300x1,400x700		470x1,490x1,100		
Weight	Unit		kg	35			46		105	115	
Casing	Material			Galvanised steel plate							
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m ³ /min	18.0/16.5/15.0	19.5/17.5/16.0	25.0/22.5/20.0	32.0/27.0/23.0	36.0/30.0/26.0	62/48/41	74/64/52
		Heating	At high / medium / low fan speed	m ³ /min	18.0/16.5/15.0	19.5/17.5/16.0	25.0/22.5/20.0	32.0/27.0/23.0	36.0/30.0/26.0	62/48/41	74/64/52
	External static pressure - 50Hz	Factory set / High / Low	Pa	100/200/-					150/250/50		
Air filter	Type			Resin net							
Sound power level	Cooling	At high / medium / low fan speed	dBA	61.0/60.0/58.0	64.0/61.0/59.0	67.0/64.0/62.0	65.0/61.0/56.0	70.0/66.0/62.0	75/74/72	76/75/73	
	Sound pressure level	Cooling	At high / medium / low fan speed	dBA	41.0/39.0/37.0	42.0/40.0/38.0	43.0/41.0/39.0		44.0/42.0/40.0	48/46.5/45	
	Heating	At high / medium / low fan speed	dBA	41.0/39.0/37.0	42.0/40.0/38.0	43.0/41.0/39.0		44.0/42.0/40.0	48/46.5/45		
Refrigerant	Type/GWP			R-32/675							
Piping connections	Liquid	OD	mm	6.35					9.52		
	Gas	OD	mm	12.70			15.90		19.1		
	Drain			VP25 (I.D. 25/O.D. 32)					BSP1		
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/60/220-240/220					1~/50/60/220-240/220-230		
Current - 50Hz	Maximum fuse amps (MFA)	A					6				
Control systems	Infrared remote control			BRC4C65 / BRC4C66					BRC4C65		
	Wired remote control			BRC1H52W/S/K							

Contains fluorinated greenhouse gases

Wall mounted unit

For rooms with no false ceilings nor free floor space

- Optimised design for R-32 refrigerant
- Flat, stylish front panel blends easily within any interior décor and is easier to clean
- Can easily be installed in both new and refurbishment projects
- The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control
- Maintenance operations can be performed easily from the front of the unit



3 fan speeds available!



More details and final information can be found by scanning or clicking the QR codes.

FXAA-A



Indoor Unit				FXAA	15A	20A	25A	32A	40A	50A	63A	
Cooling capacity	Total capacity	At high fan speed		kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1	
		At high fan speed		kW	1.9	2.5	3.2	4.0	5.0	6.3	8.0	
Power input – 50Hz	Cooling	At high fan speed		kW	0.017	0.019	0.028	0.030	0.025	0.033	0.050	
		At high fan speed		kW	0.025	0.029	0.034	0.035	0.030	0.039	0.060	
Dimensions	Unit	HeightxWidthxDepth			mm	290x795x266				290x1,050x269		
		Weight			kg	12				15		
Fan	Air flow rate – 50Hz	Cooling	At high/medium/low fan speed		m ³ /min	7.1/6.8/6.5	7.9/7.2/6.5	8.3/7.4/6.5	9.4/8.0/6.5	12.2/11.0/9.8	14.2/12.6/10.9	18.2/15.5/12.9
			Heating	At high/medium/low fan speed		m ³ /min	7.8/7.1/6.5	8.6/7.5/6.5	9.0/7.7/6.5	9.9/8.2/6.5	12.2/11.0/9.8	15.2/13.7/12.1
Air filter	Type			Removable / washable								
Sound power level	Cooling	At high fan speed		dBA	51.0	52.0	53.0	55.0		58.0	63.0	
		Sound pressure level	At high/medium/low fan speed		dBA	32.0/30.5/28.5	33.0/31.0/28.5	35.0/32.0/28.5	37.5/33.0/28.5	37.0/35.5/33.5	41.0/38.5/35.5	46.5/42.5/38.5
Refrigerant	At high/medium/low fan speed		dBA	33.0/31.0/28.5	34.0/31.5/28.5	36.0/32.5/28.5	38.5/33.5/28.5	38.0/36.0/33.5	42.0/39.0/35.5	47.0/43.0/38.5		
	Piping connections	Type/GWP			R-32/675.0							
Liquid		OD		mm	6.35							
Gas		OD		mm	9.52				12.70			
	Drain			VP13 (I.D. 15/O.D. 18)								
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240							
Current – 50Hz	Maximum fuse amps (MFA)			A	6							
Control systems	Infrared remote control			BRC7EA630 (1)								
	Wired remote control			BRC1H52W/S/K								

(1) Must be combined with Madoka wired remote controller | Contains fluorinated greenhouse gases


Ceiling suspended unit

For wide rooms with no false ceilings nor free floor space

- Optimised design for R-32 refrigerant
- Ideal for comfortable air flow in wide rooms thanks to Coanda effect: up to 100° discharge angle

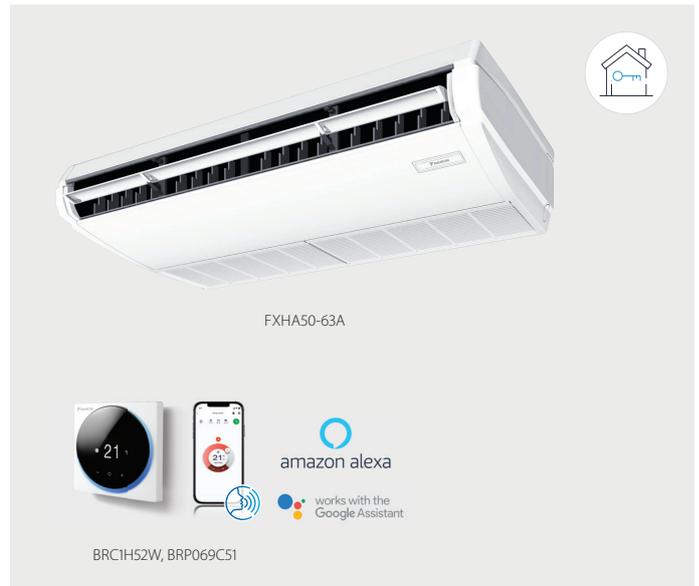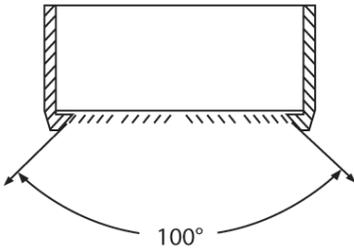

- Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily without capacity loss
- Can easily be installed in both new and refurbishment projects
- Can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space

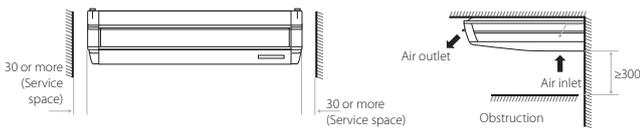

- Fresh air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required
- Fresh air intake opening in casing



* Brings in up to 10% of fresh air into the room

- Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating.



More details and final information can be found by scanning or clicking the QR codes.

FXHA-A


Indoor Unit		FXHA		32A	50A	63A	100A
Cooling capacity	Total capacity	At high fan speed		kW	3.6	5.6	7.1
	Nom.			kW	3.6	5.6	7.1
Heating capacity	Total capacity	At high fan speed		kW	4.0	6.3	8.0
	Nom.			kW	4.0	6.3	8.0
Power input - 50Hz	Cooling	At high fan speed		kW	0.033	0.037	0.051
	Heating	At high fan speed		kW	0.033	0.037	0.051
Dimensions	Unit	HeightxWidthxDepth		mm	235x960x690	235x1,270x690	235x1,590x690
Weight	Unit			kg	28	36	43
Casing	Material	Resin, sheet metal					
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m ³ /min	12.5/11.0/10.0	16.0/14.0/12.5	17.5/15.0/13.0
		Heating	At high / medium / low fan speed	m ³ /min	12.5/11.0/10.0	16.0/14.0/12.5	17.5/15.0/13.0
Air filter	Type	Resinnet					
Sound power level	Cooling	At high / medium / low fan speed		dB(A)	54.0/52.0/49.0	54.0/52.0/50.0	55.0/53.0/52.0
	Heating	At high / medium / low fan speed		dB(A)	36.0/34.0/31.0	36.5/34.5/33.0	37.0/35.0/34.0
Sound pressure level	Cooling	At high / medium / low fan speed		dB(A)	36.0/34.0/31.0	36.5/34.5/33.0	37.0/35.0/34.0
	Heating	At high / medium / low fan speed		dB(A)	36.0/34.0/31.0	36.5/34.5/33.0	37.0/35.0/34.0
Refrigerant	Type/GWP	R-32/675					
Piping connections	Liquid	OD	mm		6.35		9.52
	Gas	OD	mm		9.52	12.7	15.9
	Drain			VP20			
Power supply	Phase/Frequency/Voltage			Hz/V			
Current - 50Hz	Maximum fuse amps (MFA)			A			
Control systems	Infrared remote control		BRC7GA56 / BRC7GA53-9				
	Wired remote control		BRC1H52W/S/K / BRC1H82W/S/K				

Contains fluorinated greenhouse gases


4-way blow ceiling suspended unit

Unique Daikin unit for high rooms with no false ceilings nor free floor space



- Optimised design for R-32 refrigerant
- Even rooms with ceilings up to 3.5m can be heated up or cooled down very easily without capacity loss
- Can easily be installed in both new and refurbishment projects
- Two optional intelligent sensors improve energy efficiency and comfort
- Individual flap control: flexibility to suit every room layout without changing the location of the unit!



- Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating.
- Optimum comfort guaranteed with automatic air flow adjustment to the required load
- 5 different discharge angles between 0 and 60° can be programmed via the remote control

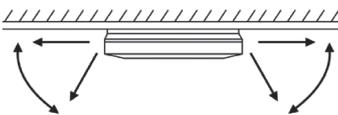

- Standard drain pump with 720mm lift increases flexibility and installation speed

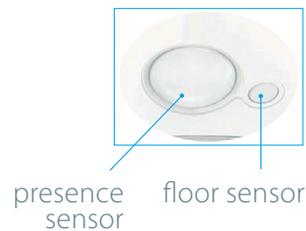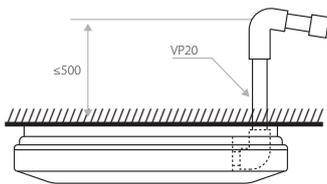

More details and final information can be found by scanning or clicking the QR codes.


FXUA-A



Indoor Unit		FXUA		50A	71A	100A	
Cooling capacity	Total capacity	At high fan speed	kW	5.6	8.0	11.2	
		Nom.	kW	5.6	8.0	11.2	
Heating capacity	Total capacity	At high fan speed	kW	6.3	9.0	12.5	
		Nom.	kW	6.3	9.0	12.5	
Power input - 50Hz	Cooling	At high fan speed	kW	0.029	0.055	0.117	
	Heating	At high fan speed	kW	0.029	0.055	0.117	
Dimensions	Unit	HeightxWidthxDepth	mm	198x950x950			
Weight	Unit		kg	27		28	
Casing	Material			Resin			
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m ³ /min	17.0/14.5/13.0	22.5/18.5/16.0	31.0/25.5/21.0
		Heating	At high / medium / low fan speed	m ³ /min	17.0/14.5/13.0	22.5/18.5/16.0	31.0/25.5/21.0
Air filter	Type			Resin net			
Sound power level	Cooling	At high / medium / low fan speed	dBA	55.0/53.0/51.0	58.0/56.0/54.0	65.0/62.0/58.0	
		At high / medium / low fan speed	dBA	37.0/35.0/33.0	40.0/38.0/36.0	47.0/44.0/40.0	
Sound pressure level	Heating	At high / medium / low fan speed	dBA	37.0/35.0/33.0	40.0/38.0/36.0	47.0/44.0/40.0	
		At high / medium / low fan speed	dBA	37.0/35.0/33.0	40.0/38.0/36.0	47.0/44.0/40.0	
Refrigerant	Type/GWP			R-32/675			
Piping connections	Liquid	OD	mm	6.35		9.52	
	Gas	OD	mm	12.7		15.9	
	Drain			VP20			
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220			
Current - 50Hz	Maximum fuse amps (MFA)		A	6			
Control systems	Infrared remote control			BRC7CB58 / BRC7CB59			
	Wired remote control			BRC1H52W/S/K			

Contains fluorinated greenhouse gases



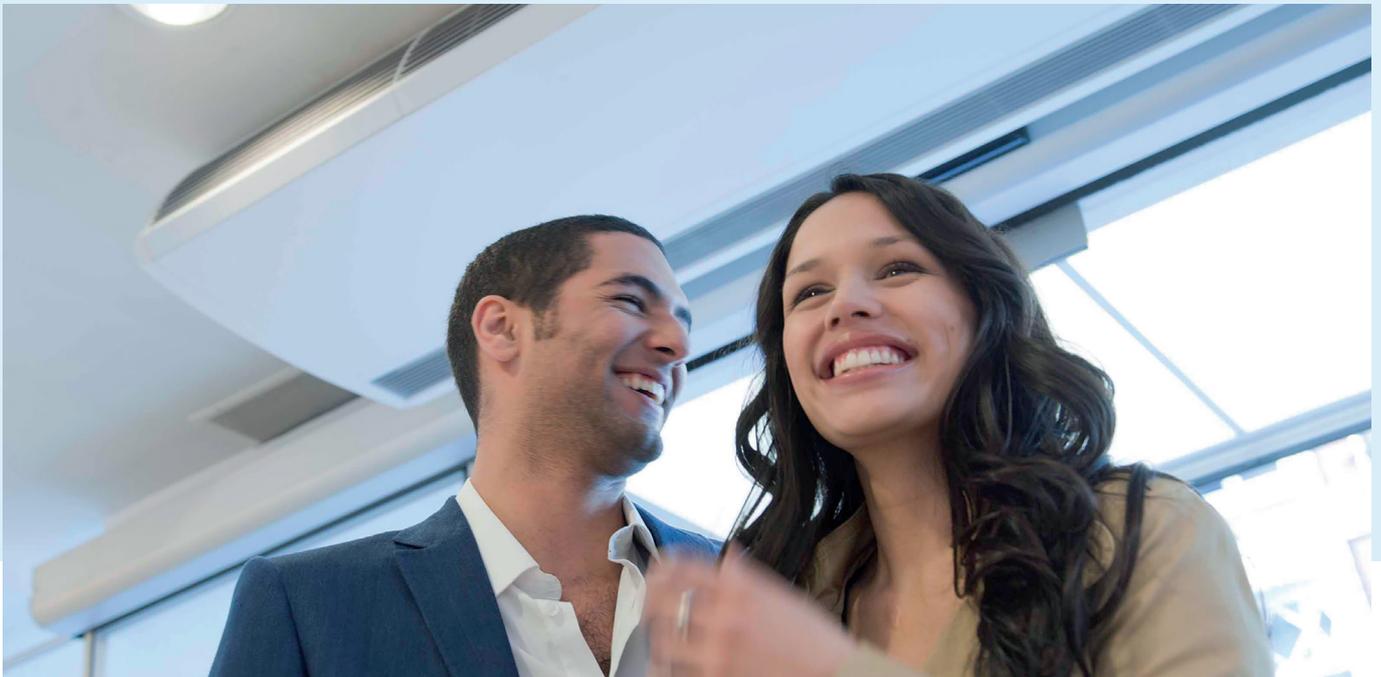


Biddle air curtains

Biddle air curtains provide highly efficient solutions for retailers and consultants to combat the issue of climate separation across their outlet or office doorway.

Benefits of Biddle air curtains

- Connectable to ERQ and VRV units
- Unified range for R-32 and R-410A refrigerant
- payback period of less than 1.5 years compared to installing an electric air curtain

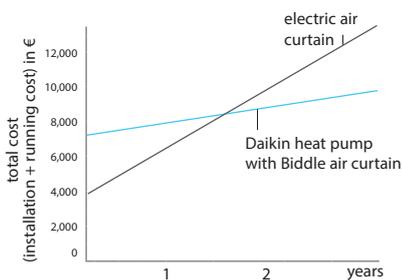

3 different models to choose from:



Free-hanging model (F):
easy wall mounted installation




Cassette model (C):
mounted into a false ceiling leaving only the decoration panel visible



Recessed model (R):
neatly concealed in the ceiling

Select your Biddle air curtain range

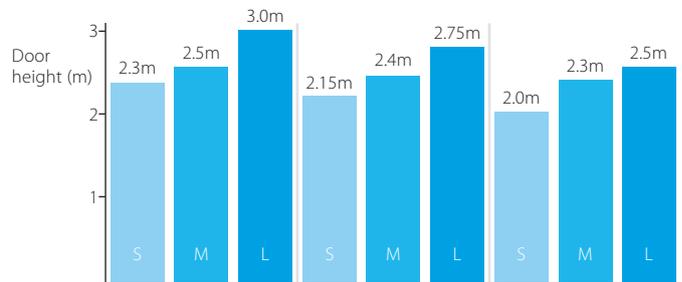

Installation condition

Favourable

ex: covered shopping mall or revolving door entrance


Normal

ex: little direct wind, no opposite open doors, building with ground floor only

Unfavourable


ex: location at a corner or square, multiple floors and/or open stairwell

Biddle air curtain nomenclature

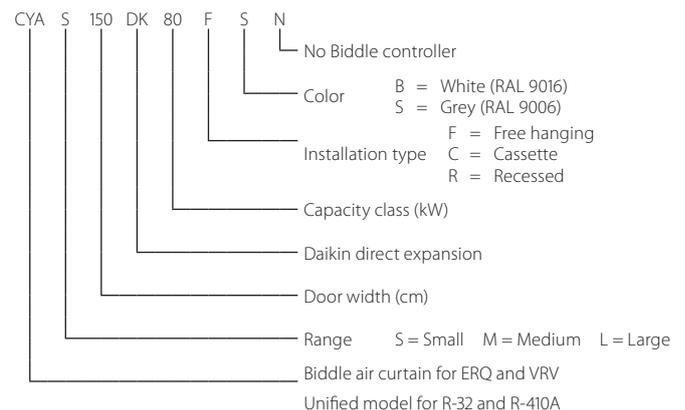

Biddle air curtain

- Connectable to ERQ and VRV DX outdoor units
- Unified model for R-32 and R-410A refrigerant
- Free-hanging model (F): easy wall mounted installation
- Cassette model (C): mounted into a false ceiling leaving only the decoration panel visible
- Recessed model (R): neatly concealed in the ceiling
- A payback period of less than 1.5 years compared to installing an electric air curtain
- Provides virtually free air curtain heating via recovered heat from indoor units in cooling mode (in case of VRV heat recovery)
- Easy and quick to install at reduced costs since no additional water systems, boilers and gas connections are required

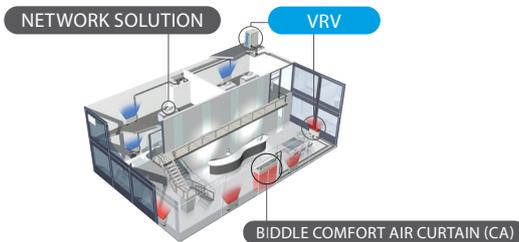


More details and final information can be found by scanning or clicking the QR codes.



CYA

				Small				Medium			
				CYA100DK80*	CYA150DK80*	CYA200DK100*	CYA250DK140*	CYAM100DK80*	CYAM150DK80*	CYAM200DK100*	CYAM250DK140*
Heating capacity	Speed 3		kW	6,94	8,6	10,9	15,2	8,65	10,5	12,5	18,6
Power input	Fan only	Nom.	kW	0,14	0,21	0,28	0,36	0,27	0,40	0,53	0,67
	Heating	Nom.	kW	0,14	0,21	0,28	0,36	0,27	0,40	0,53	0,67
Delta T	Speed 3		K	17,7	14,6	13,9	15,5	16	12,9	12,7	13,8
Casing	Colour	B: RAL9016 / S: RAL9006				B: RAL9016 / S: RAL9006					
Dimensions	Unit	Height F/C/R	mm	270/270/270				270/270/270			
		Width F/C/R	mm	1000/1000/1048	1500/1500/1548	2000/2000/2048	2500/2500/2548	1000/1000/1048	1500/1500/1548	2000/2000/2048	2500/2500/2548
		Depth F/C/R	mm	590/821/561				590/821/561			
Required ceiling void >	mm		mm	420				420			
Door height	Max.		m	2,3				2,5			
Door width	Max.		m	1	1,5	2	2,5	1	1,5	2	2,5
Weight	Unit		kg	56/59/61	66/83/88	83/102/108	107/129/137	57/68/66	73/88/93	94/111/117	108/136/144
Fan		Speed 3	m ³ /h	1164	1746	2328	2910	1605	2408	2910	4013
Sound pressure level	Heating	Speed 3	dB(A)	47	49	50	51	50	51	53	54
Refrigerant	GWP			675/2087,5				675/2087,5			
	Type			R32/R410A				R32/R410A			
Piping connections	Liquid	OD	mm	6,35			9,52	6,35			9,52
	Gas	OD	mm	12,7			15,9	12,7			15,9
Air filter	Type			Vacuum cleanable filter G1							
Power supply	Frequency		Hz	50Hz				50Hz			
	Voltage		V	230V				230V			
	Maximum fuse amps (MFA)		A	16				16			


				Large			
				CYAL100DK125*	CYAL150DK200*	CYAL200DK250*	CYAL250DK250*
Heating capacity	Speed 3		kW	14,4	21,5	27,6	29,7
Power input	Fan only	Nom.	kW	0,48	0,72	0,96	1,20
	Heating	Nom.	kW	0,48	0,72	0,96	1,20
Delta T	Speed 3		K	13,8	13,7	13,2	11,4
Casing	Colour	B: RAL9016 / S: RAL9006					
Dimensions	Unit	Height F/C/R	mm	370/370/370			
		Width F/C/R	mm	1000/1000/1048	1500/1500/1548	2000/2000/2048	2500/2500/2548
		Depth F/C/R	mm	774/1105/745			
Required ceiling void >	mm		mm	520			
Door height	Max.		m	3			
Door width	Max.		m	1	1,5	2	2,5
Weight	Unit		kg	76/81/83	100/118/141	126/151/155	157/190/196
Fan		Speed 3	m ³ /h	3100	4650	6200	7750
Sound pressure level	Heating	Speed 3	dB(A)	53	54	56	57
Refrigerant	GWP			675/2087,5			
	Type			R32/R410A			
Piping connections	Liquid	OD	mm	9,522			
	Gas	OD	mm	15,9	19,1	19,1	19,1
Air filter	Type			Vacuum cleanable filter G1			
Power supply	Frequency		Hz	50Hz			
	Voltage		V	230V			
Current	Maximum fuse amps (MFA)		A	16			

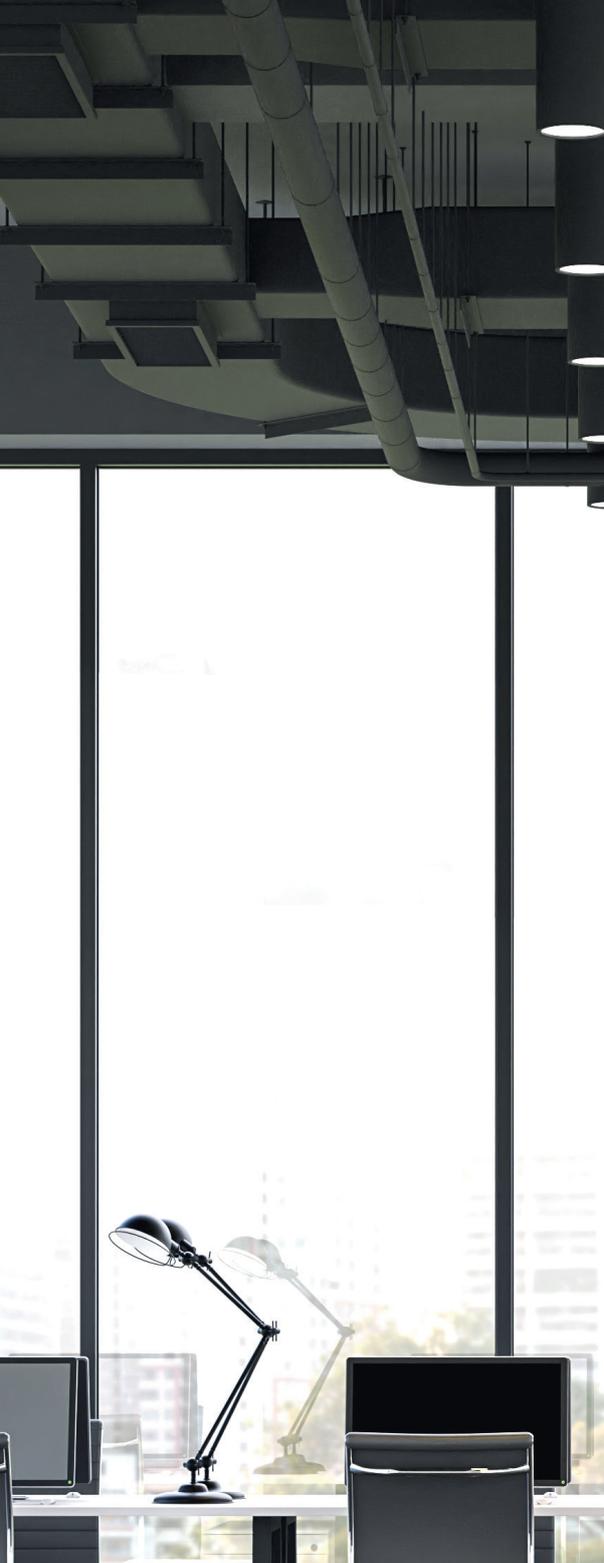

Ventilation

VAM-FC9/J Energy recovery ventilation	p. 44
EKVDX DX coil for air processing	p. 45
VKM-GBM Energy recovery ventilation, humidification and air processing	p. 46
ALB-LBS/RBS Modular L Smart	p. 48
ATB-S Modular T Smart	p. 49
Combining Air Handling Units with DX outdoor units	p. 50
Daikin Air Handling Unit kits for connection to DX outdoor units	p. 51
Air Handling Unit kits – Layout possibilities	p. 52
Daikin Fresh Air package	p. 53


Products overview

	150	500	1,000	2,000	2,500	3,000	3,500	4,000	15,000	25,000	140,000 [m³/h]	
Decentralised systems	 <ul style="list-style-type: none"> > Superior IAQ level: up to three stage filtration on supply side > DX coil integration for a unique Daikin fresh air package > Plug&Play control solution, for a quick and easy start-up 											
	MODULAR T 200 m³/h up to 4,200 m³/h											
	 <ul style="list-style-type: none"> > High efficiency counterflow heat exchanger > VDI 6022 Certified > Compact design for false ceiling installation 											
	MODULAR L 150 m³/h up to 3,400 m³/h											
	 <ul style="list-style-type: none"> > Compact size > High energy efficient paper recovering sensible and latent heat > EC fan motors > Filter clogging alarm based on pressure 											
VAM-FC9 / VAM-J 150 m³/h up to 2,000 m³/h												
 <ul style="list-style-type: none"> > DX coil for post-treatment of fresh air > Split up concept increases application flexibility > Integrates both in R-32 and R-410A VRV systems 												
VAM + DX COIL 500 m³/h up to 2,000 m³/h												
 <ul style="list-style-type: none"> > With DX coil for post-treated fresh air > Increased comfort > Humidifier option 												
VKM-GBM 500 m³/h up to 1,000 m³/h												
Centralised systems	 <ul style="list-style-type: none"> > Fully customizable > Daikin Digital Plug & Play Control as option > With DX or water coil option 											
	D-AHU PROFESSIONAL 750 m³/h up to 144,000 m³/h											
	 <ul style="list-style-type: none"> > High efficiency aluminium plate heat exchanger > Pre-configured sizes > Plug & Play pre-configured controls > With DX or water coil option 											
D-AHU MODULAR P 500 m³/h up to 25,000 m³/h												
 <ul style="list-style-type: none"> > Rotary heat exchanger (sorption and sensible technology) > Pre-configured sizes > Plug & Play pre-configured controls > With DX or water coil option 												
D-AHU MODULAR R 500 m³/h up to 25,000 m³/h												

Energy recovery ventilation

Ventilation with heat recovery as standard

- Thinnest High Efficiency Enthalpy Heat Exchanger in the market (J-series)
- Energy saving ventilation using indoor heating, cooling and moisture recovery
- Free cooling possible when outdoor temperature is below indoor temperature (eg. during nighttime)
- Prevent energy losses from over-ventilation while improving indoor air quality with optional CO₂ sensor (J-series)
- Possibility to change ESP via wired remote control allows optimisation of the supply air volume (J - series)
- Can be used as stand alone or integrated in the Sky Air or VRV system
- Wide range of units: air flow rate from 150 up to 2,000 m³/h
- Shorter installation time thanks to easy adjustment of nominal air flow rate, so less need for dampers compared with traditional installation
- No drain piping needed
- Can operate in over- and under pressure
- Total solution for fresh air with Daikin supply of both VAM / VKM and electrical heaters
- VAM-J8 series are connectable to EKVDX DX coil for air processing
- Possibility of visualizing CO₂ concentration when combining VAM-J8 with optional BRYMA CO₂ sensor and Madoka remote controller (with or without EKVDX)

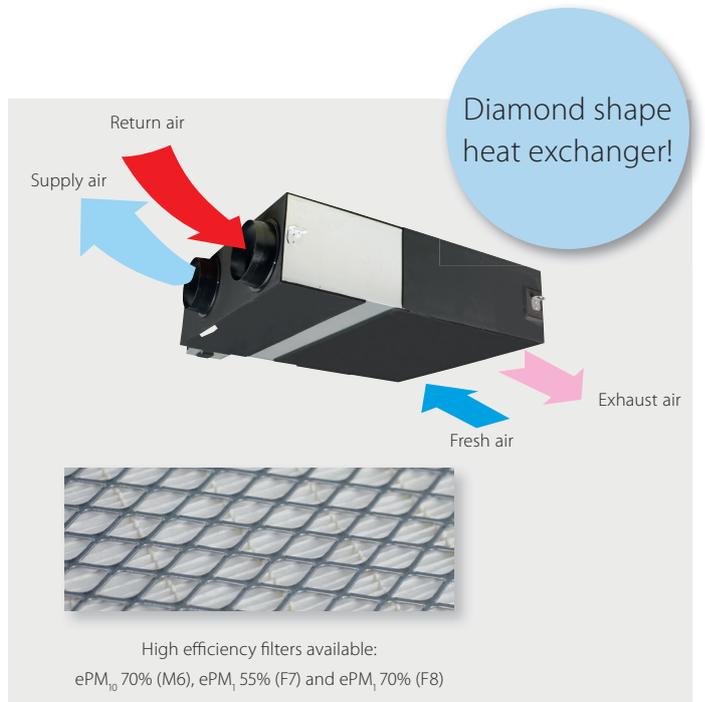

More details and final information can be found by scanning or clicking the QR codes.

VAM-FC9



VAM-J8





Ventilation		VAM/VAM		150FC9	250FC9	350J8	500J8	650J8	800J8	1000J8	1500J8	2000J8								
Power input - 50Hz	Heat exchange mode	Nom.	Ultra high/High/Low	kW	0.132/0.111/0.058	0.161/0.079/0.064	0.097/0.070/0.039	0.164/0.113/0.054	0.247/0.173/0.081	0.303/0.212/0.103	0.416/0.307/0.137	0.548/0.384/0.191	0.833/0.614/0.273							
	Bypass mode	Nom.	Ultra high/High/Low	kW	0.132/0.111/0.058	0.161/0.079/0.064	0.085/0.061/0.031	0.148/0.100/0.045	0.195/0.131/0.059	0.289/0.194/0.086	0.417/0.300/0.119	0.525/0.350/0.156	0.835/0.600/0.239							
Temperature exchange efficiency - 50Hz	Ultra high/High/Low		%	77.0(1)/72.0(2)/78.3(1)/72.3(2)/82.8(1)/73.2(2)	74.9(1)/69.5(2)/76.0(1)/70.0(2)/80.1(1)/72.0(2)	85.1/86.7/90.1	80.0/82.5/87.6	84.3/86.4/90.5	82.5/84.2/87.7	79.6/81.8/86.1	83.2/84.8/88.1	79.6/81.8/86.1								
Enthalpy exchange efficiency - 50Hz	Cooling	Ultra high/High/Low	%	60.3(1)/61.9(1)/67.3(1)	60.3(1)/61.2(1)/64.5(1)	65.2/67.9/74.6	59.2/61.8/69.5	59.2/63.8/73.1	67.7/70.7/76.8	62.6/66.4/74.0	68.9/71.8/77.5	62.6/66.4/74.0								
	Heating	Ultra high/High/Low	%	66.6(1)/67.9(1)/72.4(1)	66.6(1)/67.4(1)/70.7(1)	75.5/77.6/82.0	69.0/72.2/78.7	73.1/76.3/82.7	72.8/75.3/80.2	68.6/71.7/77.9	73.8/76.1/80.8	68.6/71.7/77.9								
Operation mode	Heat exchange mode, bypass mode, fresh-up mode																			
Heat exchange system	Air to air cross flow total heat (sensible + latent heat) exchange																			
Heat exchange element	Specially processed non-flammable paper																			
Dimensions	Unit	HeightxWidthxDepth	mm	285x776x525		301x1,113x886		368x1,354x920		368x1,354x1,172		731x1,354x1,172								
Weight	Unit	kg	24.0		46.5		61.5		79.0		157									
Casing	Material	Galvanised steel plate																		
Fan	Air flow rate - 50Hz	Heat exchange mode	Ultra high/High/Low	m ³ /h	150/140/105	250/230/155	350(1)/300(1)/200(1)	500(1)/425(1)/275(1)	650(1)/550(1)/350(1)	800(1)/680(1)/440(1)	1,000(1)/850(1)/550(1)	1,500(1)/1,275(1)/825(1)	2,000(1)/1,700(1)/1,100(1)							
		Bypass mode	Ultra high/High/Low	m ³ /h	150/140/105	250/230/155	350(1)/300(1)/200(1)	500(1)/425(1)/275(1)	650(1)/550(1)/350(1)	800(1)/680(1)/440(1)	1,000(1)/850(1)/550(1)	1,500(1)/1,275(1)/825(1)	2,000(1)/1,700(1)/1,100(1)							
	External static pressure - 50Hz	Ultra high/High/Low	Pa	90/87/40		70/63/25		90(1)/70.0/50.0(1)												
Air filter	Type	Multidirectional fibrous fleeces																		
Sound pressure level - 50Hz	Heat exchange mode	Ultra high/High/Low	dBA	27.0/26.0/20.5		28.0/26.0/21.0		34.5(1)/32.0(1)/29.0(1)		37.5(1)/35.0(1)/30.5(1)		39.0(1)/36.0(1)/31.0(1)		42.0(1)/38.5(1)/32.5(1)		42.0(1)/39.0(1)/33.5(1)		45.0(1)/41.5(1)/36.0(1)		
	Bypass mode	Ultra high/High/Low	dBA	27.0/26.5/20.5		28.0/27.0/21.0		34.5(1)/32.0(1)/28.0(1)		38.0(1)/35.0(1)/29.5(1)		38.0(1)/34.5(1)/30.5(1)		40.0(1)/36.5(1)/30.5(1)		42.5(1)/40.0(1)/32.5(1)		42.0(1)/39.0(1)/32.5(1)		45.0(1)/41.0(1)/35.0(1)
Operation range	Around unit	°CDB	-				0°C~40°CDB, 80% RH or less													
Connection duct diameter	mm	100		150		200		250		2x250										
Power supply	Phase/Frequency/Voltage	Hz/V	1~; 50/60; 220-240/220																	
Current	Maximum fuse amps (MFA)	A	15.0				16.0													
Specific energy consumption (SEC)	Cold climate	kWh/(m ² ·a)	-56.0(5)		-60.5(5)		-													
	Average climate	kWh/(m ² ·a)	-22.1(5)		-27.0(5)		-													
	Warm climate	kWh/(m ² ·a)	-0.100(5)		-5.30(5)		-													
SEC class		D / See note 5		B / See note 5		-														
Maximum flow rate at 100 Pa ESP	Flow rate	m ³ /h	130		207		-													
	Electric power input	W	129		160		-													
Sound power level (Lwa)		dB	40		43		51		54		58		61		62		65			
Annual electricity consumption		kWh/a	18.9(5)		13.6(5)		-													
Annual heating saved	Cold climate	kWh/a	41.0(5)		40.6(5)		-													
	Average climate	kWh/a	80.2(5)		79.4(5)		-													
	Warm climate	kWh/a	18.5(5)		18.4(5)		-													

(1)Measured according to JIS B 8628 | (2)Measured at reference flow rate according to EN13141-7 | (5) At reference flow rate in accordance with commission regulation (EU) No 1254/2014

DX coil for air processing

Post heating or cooling of fresh air to lower the load on the air conditioning system

- Creates a high quality indoor environment by pre conditioning of incoming fresh air
- Maximum installation flexibility thanks to separate DX coil
- Wide range of units covering fresh air flows of 500 up to 2,000 m³/h
- High ESP up to 150 Pa
- Can be integrated in both R-32/R-410A VRV systems

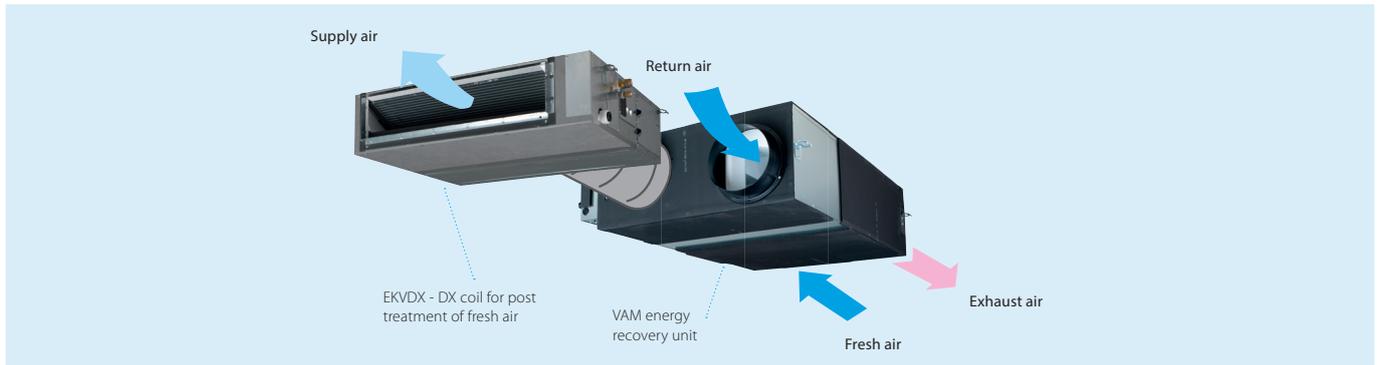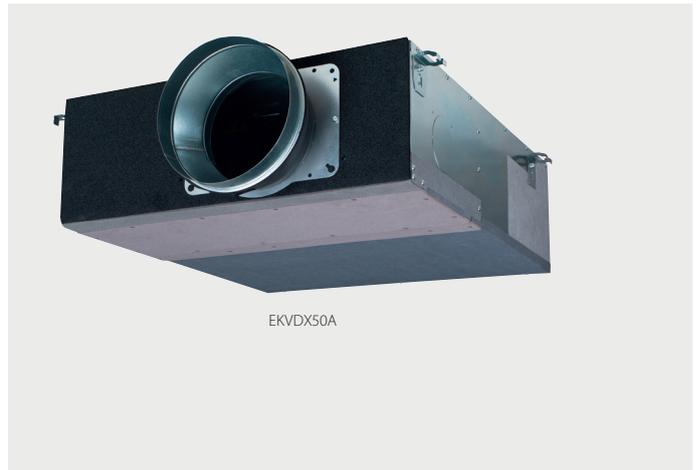

More details and final information can be found by scanning or clicking the QR codes.

EKVDX-A

				EKVDX32A	EKVDX50A	EKVDX80A	EKVDX100A
Power input - 50Hz	Cooling	Nom.	kW	0.035	0.035	0.035	0.035
	Heating	Nom.	kW	0.035	0.035	0.035	0.035
Casing	Galvanised steel plate						
Insulation material	Opcell and anti-sweat material						
Dimensions	Unit	Height	mm	250			
		Width	mm	550	700	1,000	1,400
		Depth	mm	809			
Weight	Unit		kg	19	23.4	30.1	37.7
Operation range	Around unit		°CDB	10°C~40°CDB, 80% RH or less			
	On coil temperature	Cooling	Max.	35			
		Heating	Min.	11			
Piping connections	Liquid	OD	mm	6.35			
	Gas	OD	mm	12.7			
	Drain	VP20 (I.D. 20/O.D. 26), drain height 625 mm					
Refrigerant	Type	R410A/R32					
	GWP	2,087.5/675					
Heat exchange system	Direct expansion						
Power supply	Phase	single phase					
	Frequency	50/60					
	Voltage	220-240/220					

Possible Combination VAMJ8 + EKVDX				EKVDX32A + VAM500J8	EKVDX50A + VAM650J8	EKVDX50A + VAM800J8	EKVDX80A + VAM1000J8	EKVDX100A + VAM1500J8	EKVDX100A + VAM2000J8	
Cooling capacity	Total (VAM+DX coil)	At ultra high fan speed	kW	5.1	7.1	8.6	9.3	15.4	18.4	
		DX coil	At ultra high fan speed	kW	3.4	4.8	5.5	5.7	9.5	11.2
	Heating capacity	Total (VAM+DX coil)	At high fan speed	kW	2.7	4.1	4.4	4.5	8.8	9.2
DX coil			At ultra high fan speed	kW	6.7	8.5	11	11.9	18.7	22.9
Fan		Air flow rate - 50Hz	At high fan speed	kW	4.2	5.1	6.9	7	10.8	13
	Ultra high		m ³ /h	3.6	4.6	5.8	6.3	9.6	11.7	
	High		m ³ /h	425	550	680	850	1,275	1,700	
	External static pressure - 50Hz	Bypass mode	Ultra high	m ³ /h	500	650	800	1,000	1,500	2,000
			High	m ³ /h	425	550	680	850	1,275	1,700
		Maximum	Pa	81.9	73.0	133.7	106.0	153.6	92.1	
Sound pressure level - 50Hz	Cooling	Ultra high	Pa	51.9	43.0	23.7	26.0	43.6	12.1	
		High	Pa	39.0	33.9	19.4	21.4	35.1	11.9	
		Ultra high	dBA	32	34	35.5	40.5	38.5	43.5	
	Heating	High	dBA	30.5	32	34	38	37	40	
		Ultra high	dBA	32.5	34.5	36	40.5	39	44	
		High	dBA	31.5	32	34	38.5	37	40.5	
Current	Maximum fuse amps (MFA)		A	6	6	6	6	16	16	

The heat reclaim ventilation unit and the EKVDX indoor unit MUST share the same electrical safety devices and power supply

Energy recovery ventilation, humidification and air processing



VKM80-100GBM

Post heating or cooling of fresh air for lower load on the air conditioning system

- Energy saving ventilation using indoor heating, cooling and moisture recovery
- Creates a high quality indoor environment by pre conditioning of incoming fresh air
- Humidification of the fresh air results in comfortable indoor humidity level, even during heating
- Free cooling possible when outdoor temperature is below indoor temperature (eg. during nighttime)
- Low energy consumption thanks to DC fan motor
- Prevent energy losses from over-ventilation while improving indoor air quality with optional CO₂ sensor
- Shorter installation time thanks to easy adjustment of nominal air flow rate, so less need for dampers compared with traditional installation
- Specially developed heat exchange element with High Efficiency Paper (HEP)
- Can operate in over- and under pressure



More details and final information can be found by scanning or clicking the QR codes.

VKM-GBM

Ventilation		VKM-GBM		50GBM	80GBM	100GBM	
Power input - 50Hz	Heat exchange mode	Nom.	Ultra high/High/Low	kW	0.270/0.230/0.170	0.330/0.280/0.192	0.410/0.365/0.230
	Bypass mode	Nom.	Ultra high/High/Low	kW	0.270/0.230/0.170	0.330/0.280/0.192	0.410/0.365/0.230
Fresh air conditioning load	Cooling			kW	4.71/1.91/3.5	7.46/2.96/5.6	9.12/3.52/7.0
	Heating			kW	5.58/2.38/3.5	8.79/3.79/5.6	10.69/4.39/7.0
Temperature exchange efficiency - 50Hz	Ultra high/High/Low			%	76/76/77.5	78/78/79	74/74/76.5
Enthalpy exchange efficiency - 50Hz	Cooling	Ultra high/High/Low		%	64/64/67	66/66/68	62/62/66
	Heating	Ultra high/High/Low		%	67/67/69	71/71/73	65/65/69
Operation mode				Heat exchange mode / Bypass mode / Fresh-up mode			
Heat exchange system				Air to air cross flow total heat (sensible + latent heat) exchange			
Heat exchange element				Specially processed non-flammable paper			
Humidifier				Natural evaporating type			
Dimensions	Unit	HeightxWidthxDepth		mm	387x1,764x832	387x1,764x1,214	
Weight	Unit			kg	100	119	123
Casing				Galvanised steel plate			
Fan-Air flow rate - 50Hz	Heat exchange mode	Ultra high/High/Low		m ³ /h	500/500/440	750/750/640	950/950/820
	Bypass mode	Ultra high/High/Low		m ³ /h	500/500/440	750/750/640	950/950/820
Fan-External static pressure - 50Hz	Ultra high/High/Low			Pa	200/150/120	205/155/105	110/70/60
Air filter				Multidirectional fibrous fleeces			
Sound pressure level - 50Hz	Heat exchange mode	Ultra high/High/Low		dB(A)	38/36/34	40/37.5/35.5	40/38/35.5
	Bypass mode	Ultra high/High/Low		dB(A)	39/36/34.5	41/38/36	41/39/35.5
Operation range	Around unit			°CDB	0°C~40°CDB, 80% RH or less		
	Supply air			°CDB	-15°C~40°CDB, 80% RH or less		
	Return air			°CDB	0°C~40°CDB, 80% RH or less		
	On coil temperature	Cooling/Max./Heating/Min.		°CDB	-15/43		
Refrigerant	Control			Electronic expansion valve			
	Type			R-410A			
	GWP			2,087.5			
Connection duct diameter				mm	200	250	
Piping connections	Liquid	OD		mm	6.35		
	Gas	OD		mm	12.7		
	Water supply			mm	6.4		
	Drain				PT3/4 external thread		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240		
Current	Maximum fuse amps (MFA)			A	15		



Modular L Smart

Premium efficiency heat recovery unit

Highlights

- Connects Plug&Play into the Sky Air and VRV control network
- Easy installation and commissioning
- Internal pre-filter stage (up to ePM1 50% (F7) + ePM1 80% (F9)) making the unit reach highest indoor air quality requirements.
- Wide air flow coverage from 150m3/h to 3,400m3/h
- Exceeding ErP 2018 requirements
- Best choice when compactness is needed (only 280 mm height up to 550 m3/h)
- 50 mm double skin panel (120 kg/m3) for a maximum sound and thermal insulation

EC centrifugal fan

- Maximum ESP available 600 Pa (depending on model sizes and airflow)
- Inverter driven with IE4 premium efficiency motor
- High-efficient blade profiling
- Reduced energy consumption
- Optimized SFP (Specific Fan Power) for an efficient unit operation

Heat exchanger

- Premium quality counter flow plate heat exchanger
- Up to 91% of the thermal energy recovered
- High grade aluminum allowing optimum corrosion protection



For integration with Applied systems, please refer to the Modular L, in the AHU chapter

More details and final information can be found by scanning or clicking the QR codes.

ALB-LBS



ALB-RBS



Technical details

D-AHU Modular L Smart		ALB02*BS	ALB03*BS	ALB04*BS	ALB05*BS	ALB06*BS	ALB07*BS
Airflow	m ³ /h	300	600	1,200	1,600	2,300	3,000
Heat exchanger thermal efficiency (1)	%	86		87		86	
External static pressure	Nom. Pa	100					
Current	Nom. A	0.61	1.35	2.26	2.83	4.39	6.22
Power input	Nom. kW	0.14	0.31	0.52	0.65	1.01	1.43
SFPv (2)	kW/m ³ /s	1.25	1.52	1.3	1.35	1.35	1.51
Electrical supply	Phase	ph					
	Frequency	Hz					
	Voltage	V					
Main unit dimensions	Width	mm	920	1,100	1,600	2,000	
	Height	mm	280	350	415	500	
	Length	mm	1,660	1,800	2,000		
Rectangular duct flange	Width	mm	250	400	500	700	
	Height	mm	150	200	300	400	
Weight unit	kg	125	180	270	280	355	360

(1) Winter design condition: Outdoor: -5°C, 90% Indoor: 22°C, 50% | (2) SFPv is a parameter that quantifies the fan efficiency (the lower it is the better will be). This reduces if airflow decreases.

Modular T Smart

Top connected Air Handling Unit

Highlights

- Duct connections are located at the top, reducing the unit's footprint
- Low power consumption and low SFP (Specific Fan Power) for a very efficient unit operation
- Superior IAQ level: up to three stage filtration on supply side (more than the 90% of PM1 is removed from outdoor air)
- Plug&Play control solution, for a quick and easy start-up
- Very compact unit, starting from 550 mm width, for an air flow up to 1,100 m³/h
- DX coil integration for a unique Daikin fresh air package available for connection to VRV or ERQ



IAQ matters

An excellent IAQ improves people's performance and well-being, and decreases risk factors for various diseases. Modular T satisfies the ventilation and filtration needs of the indoor environment, guaranteeing an outstanding level of IAQ.

The future of ventilation

The Modular T, with its unique features, represents the latest product developed by Daikin for fresh air treatment and not only. Thanks to its optimized design, it can be easily transported and installed into new projects or existing buildings.

More details and final information can be found by scanning or clicking the QR codes.



Technical details

MODULAR T Pro & Smart	Size (1)	03	04	05	06	07		
Airflow	m ³ /h	800	1,650	2,300	2,700	3,900		
HE Thermal efficiency (2)	%	89.3	88.3	85.1	85.5	90.8		
External static pressure	Pa			100				
Current	A	1.70	3.39	4.61	5.17	7.87		
Power input	kW	0.39	0.78	1.06	1.19	1.81		
SFPv (2)	kW/m ³ /s	1.47	1.5	1.49	1.41	1.5		
Electrical supply	Phase (ph)	1						
	Frequency (Hz)	50/60						
	Voltage (V)	220/240 Vac						
Main unit Dimensions	Width (mm)	550		790		890		
	Height (3) (mm)		1,600		1,900	2,050		
	Length (mm)	1,580		1,650	2,170 (4)	2,620 (5)	2,950 (5)	
Circular duct flange	Diameter (mm)	255		315	355	400	500	
Unit sound power level	dB(A)	57		52		55	58	
Unit sound pressure level (6)	dB(A)	50		45		48	51	
Weight unit	Kg	200		250		400	500	620

(1) All size available in Smart or Pro version and right or left handing | (2) Outdoor condition: -5°C, 90% Indoor condition: 25°C, 50% | (3) Including feet and duct connections | (4) Size 05 is provided in two sections | (5) Size 06 and 07 are provided in three sections | (6) Simple source reference value at 1 meter, directivity factor Q=4 (quarter sphere) and non-reverberant field. Allowances on declared values: +/- 3dB

Combining Air Handling Units with DX outdoor units



High comfort levels

- Rapid response of supply air temperature to changing loads, results in a steady indoor temperature
- VRV offers the ultimate comfort thanks to continuous heating, also during defrost

Low carbon footprint and operating costs

- DX heat pumps are highly efficient inverter units using a lower GWP refrigerant
- By integrating a VRV heat recovery system, excess heat from rooms in cooling can be reused to heat up incoming fresh air


Easy design, all components integrated

- A DX system is an all-in-one system, no boilers, tanks or pumps are needed reducing the total investment cost

One-stop shop, Daikin's fresh air package

- A plug & play package with a Daikin DX outdoor unit and Daikin Air Handling Unit
- One point of contact for the design, installation and commissioning, streamlining the process

Total solution operation example

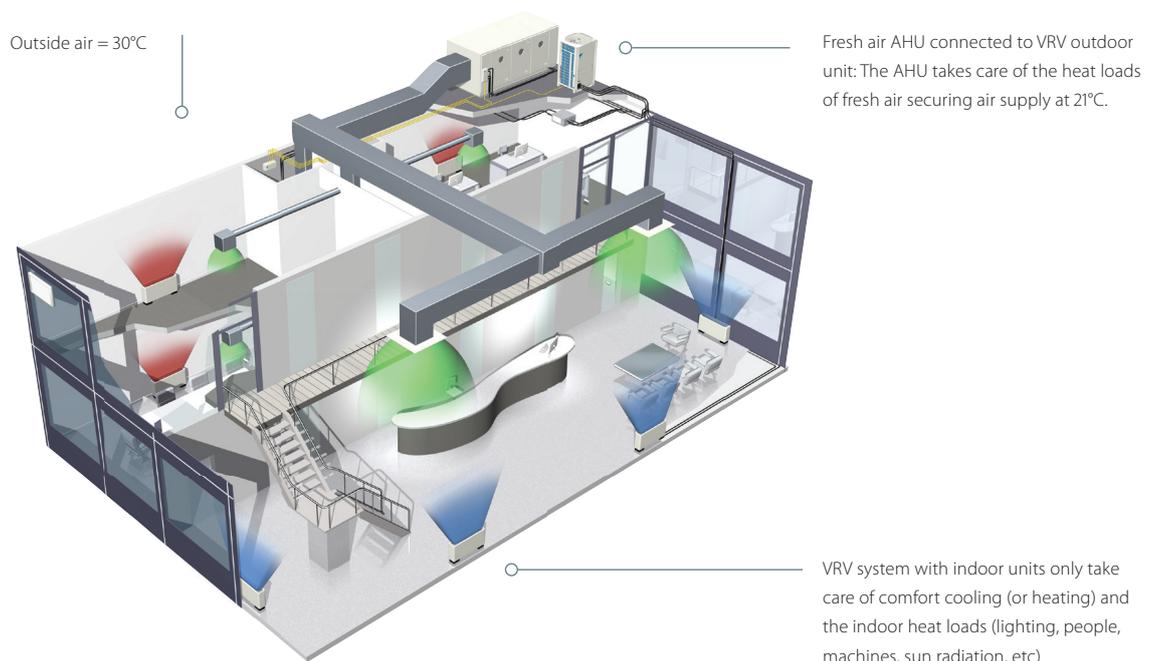

Daikin Air Handling Unit kits for connection to DX outdoor units

R-32

NEW Expansion valve kits

- 3 new capacities (300,350,400) offer a complete range of expansion valve kits from 5 to 69.3kW
- Improved flexibility thanks to combination ratio from 65% up to 110%
- Unified range connectable both to R-32 and R-410A systems
- Can be used in the most extreme outdoor conditions, down to -20°C
- Fully compliant to IEC60335-2-40, thanks to Shirudo Technology




NEW Control box

- Complete offer of 5 control possibilities
 - Daikin integrated or third-party controller
 - Control of return air or fresh air supply temperature
- All control methods unified in one box
- Hinged door for easy servicing



Expansion valve set (EKEXVA*)

- Controls the refrigerant flow in the AHU DX coil
- Fully brazed and wired in case of a Daikin AHU

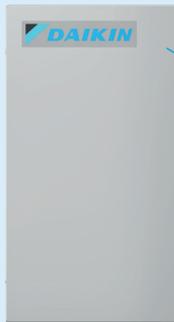

Control box (EKEACB)

- Controls the expansion valve set and outdoor unit(s) capacity
- Mounted and wired in case of a Daikin AHU



Specifications

EKEXVA – EXPANSION VALVE KIT

Ventilation		EKEXVA	50	63	80	100	120	140	200	250	300	350	400	450	500		
Dimensions	Unit	mm	404x217x80.5														
Weight	Unit	kg	2.9														
Operation range	On coil temperature	Heating Min.	10.0														
		Cooling Max.	35.0														
Ambient installation conditions	Min.	°CDB	-20.0														
		Max	52.0														
Sound pressure level	Cooling	Nom.	dBA	36.5	37.5	38.6	39.5	40.5	41.1	42.5	43.5	44.3	45.1	45.6	46.1	46.5	
	Nom.	dBA	24.8	25.8	26.8	27.8	28.8	29.4	30.8	31.8	32.5	33.3	33.8	34.3	34.8		
Refrigerant	Type / GWP	R-32 / 675 R-410A / 2,0875															
Piping connections	Liquid	Type	mm														
		OD	mm			mm						mm					
			6.35			9.52						12.7					

EKEACB – CONTROL BOX

		EKEACB	
Layout		Pair Multi Mix	
Dimensions	Unit	mm	300x400x150
Weight	Unit	kg	5.1
Ambient installation conditions	Min	°CDB	-20
	Max	°CDB	52
Power supply	Phase		1~
	Frequency	Hz	50/60
	Voltage	V	220-240/220

Click more information on [EKEACB](#) or [EKEXVA](#) outdoor units

Air Handling Unit kits – Layout possibilities

With our wide capacity range and different control options, a variety of layout possibilities to match your application:

- > Pair layout: one or more outdoor units combined with 1 air handling unit
- > Multi layout: one outdoor unit combined with multiple air handling units
- > Mix layout: one outdoor unit combined with an air handling unit AND indoor units

Pair layout


One ERQ or VRV heat pump (system) connected to one AHU through one refrigerant circuit

- > with W, X, Y, Z, Z' control
- > not allowed for VRV H/R




One VRV heat pump (system) connected to the interlaced coil of one AHU through several refrigerant circuits

- > with W, X, Y control
- > not allowed for VRV H/R and VRV-i

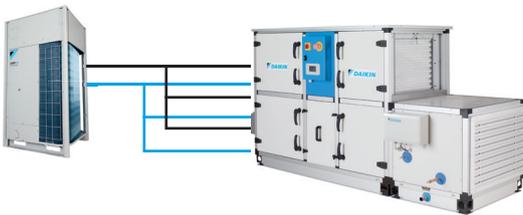

Several ERQ or VRV heat pumps connected to the interlaced coil of one AHU through several refrigerant circuits


- > with W, X, Y control
- > not allowed for VRV H/R and VRV-i

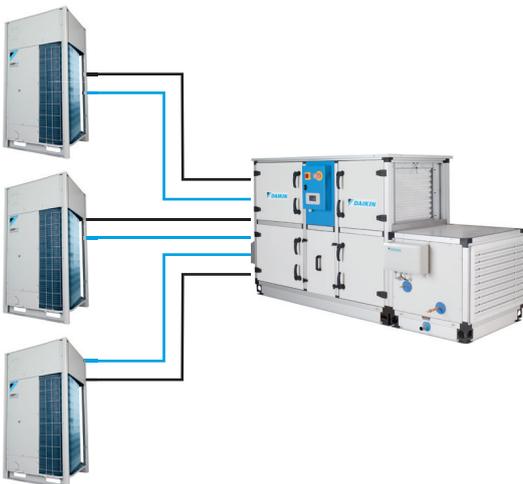

Multi layout

One VRV heat pump connected to several AHUs


- > with Z, Z' control and field supplied controls on AHU side.
- > not allowed for VRV H/R
- > no interlaced coil possible

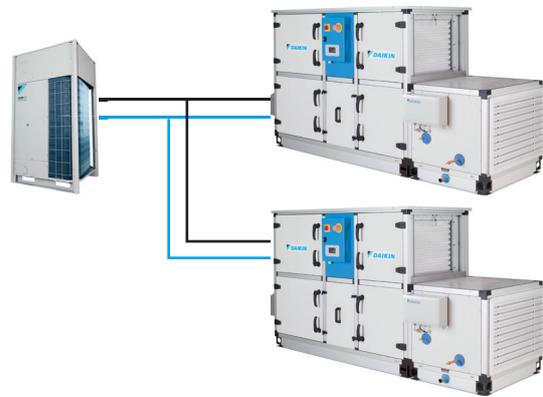

Mix layout

VRV indoor units and AHU(s) mixed in the same VRV heat pump or heat recovery system

- > with Z, Z' control and field supplied controls on AHU side
- > no interlaced coil possible
- > hydrobox not possible

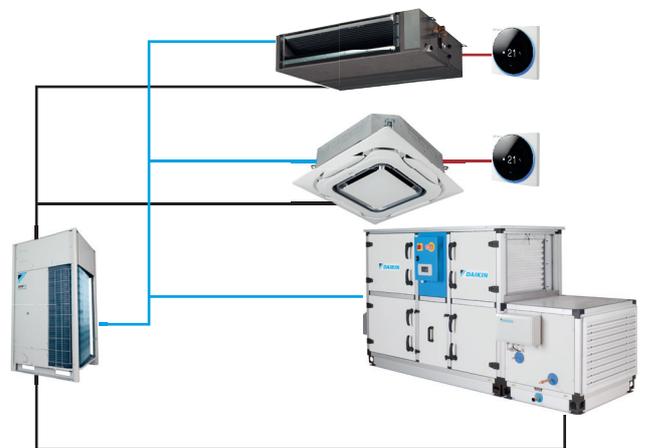

- Refrigerant piping
- F1-F2
- P1-P2



Daikin Fresh Air package

What is included?

- A plug & play package with a Daikin DX outdoor unit and Daikin Air Handling Unit
- Factory fitted and welded DX coil, expansion valve kit and control box
- One point of contact



VRV or ERQ outdoor condensing unit



Daikin Air Handling Unit



Factory fitted and welded DX coil, expansion valve kit and control box

Simplified business

- Unique total solution approach of heating, cooling and ventilation
- Off-the-shelf compatibility between Daikin outdoor unit and Daikin AHU
- Plug&play control for outstanding reliability
- **Peace-of-mind thanks to a single point of contact**


Simple selection in 2-steps

STEP 1



Select your design in ASTRA software

STEP 2

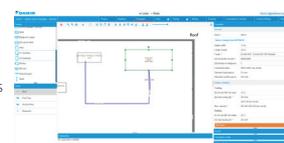

Add the AHU design in Xpress (including capacity, dimensions, refrigerant connection location,...)

Share with Xpress

Complete range of possibilities



750 m³/h up to 144,000 m³/h

D-AHU Professional

- Infinite variable sizes
- Tailored to the individual customer



500 m³/h up to 25,000 m³/h

D-AHU Modular R

- Pre-configured sizes
- Plug and play concept
- EC Fan technology
- Heat recovery wheel (sorption and sensible technology)
- Compact design



500 m³/h up to 25,000 m³/h

D-AHU Modular P

- Pre-configured sizes
- Plug and play concept
- EC Fan technology
- High efficiency aluminium counter flow PHE
- Compact design



Application overview

Individual control systems	p. 55
Onecta App	p. 58
Madoka wired remote controller	p. 60
Wired / infrared remote controllers	p. 63
Centralised control systems	p. 64
Intelligent tablet controller 	p. 64
Intelligent touch manager 	p. 66
NEW Daikin Cloud Plus 	p. 70
Standard protocol interfaces	p. 70
NEW Individual Modbus Interface	p. 78
DIII-net modbus Interface	p. 80
KNX Interface	p. 81
PMS Interface for hotels	p. 82
BACnet Interface	p. 83
LonWorks Interface	p. 84
Daikin Configurator Software	p. 85
EKPCAB4	p. 85
Other devices	p. 86
Wireless room temperature sensor	p. 86
Wired room temperature sensor	p. 86
Adapter PCB's	p. 87

Connect with Daikin

If you are a user or installer it is important you can **interact with our systems** in the easiest way, from **anywhere you are**. For any user our interfaces create **peace of mind** that their system is running in the best possible way.

Depending on the type of user and application Daikin develops controls and cloud services to ensure the best experience.

- For home owners it means **app and voice control** of their home comfort.
- For hotel owners it means easy and stylish **personal control for guests**, with an integration in hotel booking software for central control
- For facility managers it means **cloud access** to all sites, with the possibility to benchmark, optimize performance
- For installers it means **easy transfer of settings during commissioning**, remote retrieval of errors and preventive alerts to save time on maintenance or interventions

Our controls enable you to **connect with your customer**, save time, improve your comfort intelligently and reduce energy bills.



White





Silver



Black

Remote monitoring

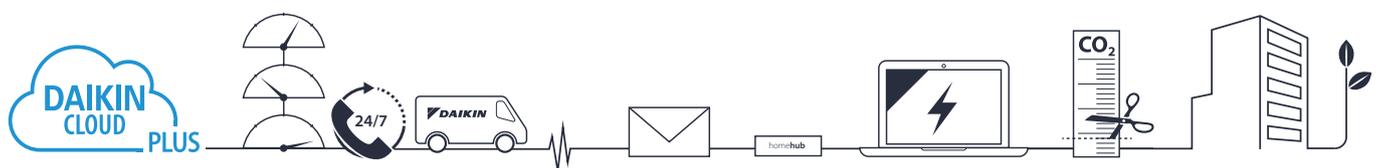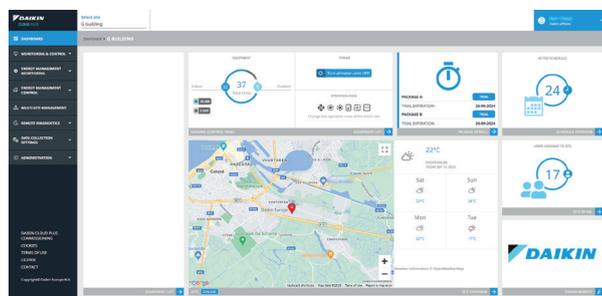

Control solutions summary

Daikin offers various control solutions adapted to the requirements of even the most demanding commercial application.

- Basic control solutions for those customers with few requirements and limited budget
- Integrating control solutions for those customers who would like to integrate Daikin units into their existing BMS system
- Advanced control solutions for those customers who expect Daikin to deliver a mini BMS solution, including advanced energy management

Infrastructure cooling



	Unit	Integrating control	Advanced
			
	BRC1H52W/S/K	RTD-10	DCM601B51
	1 remote controller for 1 indoor unit (group) (2)	1 gateway for 1 indoor unit (group) Up to 8 gateways can be linked together	1 iTM for 64 indoor unit(s) (groups) (1)
Automatic control of A/C	●	●	●
Back-up operation	●	●	●
Duty rotation	●	●	●
Limit control possibilities in the technical cooling room	●	●	●
If room temperature above max., then show alarm & start standby unit.		●	●
If an error occurs, an alarm will be shown.	●	●	●
If an error occurs, activate an alarm output	Via KRP2/4A option (3)	●	Via WAGO I/O

(1) 7 iTM plus adapters (DGE601A52 and DGE601A53) can be added to have 512 indoor groups and 80 outdoor (systems) | (2) Infrastructure cooling functions only compatible with indoor units connected to RZQG*/RZAG* outdoor units. | (3) See option list of indoor unit

Hotel



	Unit control	Integrating control		Advanced control		
						
	BRC1H52 W/S/K	RTD-20	KLIC DI V2	DCM010A51	DCM601B51	DGE601A51 DGE602A51
	1 remote controller for 1 indoor unit (group)	1 gateway for 1 indoor unit (group)	Two additional probes can be connected	1 interface for up to 2,500 indoor units	1 iTM for 64 indoor unit(s) (groups) (1)	Up to 512 units with extension modules via Daikin Cloud Plus Max 64 units via Daikin Cloud Plus
Hotel guest can control & monitor basic functionalities from his room	●					
Limit control possibilities for hotel guests	●	●	●	●	●	●
Interlock with window contact		●			●	●
Interlock with key-card		●			●	●
Integrate Daikin units into existing BMS via Modbus		●				
Integrate Daikin units into existing BMS via KNX			●			
Integrate Daikin units into existing BMS via HTTP				●		
Integrate Daikin unit control in hotel booking software				●		
Oracle Opera PMS				●		
Monitor energy consumption					●	●
Advanced energy management					●	●
Integrate Daikin products cross pillars into Daikin BMS					●	
Integrate third party products into Daikin BMS					●	●
Online control					●	●

(1) 7 iTM plus adapters (DGE601A52 and DGE601A53) can be added to have 512 indoor groups and 80 outdoor (systems)


Office



	Unit control	Integrating control				Advanced control			
	BRC1H52 W/S/K	EKMBDXB	DMS504B51	DMS502A51	DCC601A51	DCM601B51	DGE601A51	DGE602A51	
	1 remote controller for 1 indoor unit (group)	1 gateway for max. 64 indoor unit(s) (groups) & 10 outdoors	1 gateway for 64 indoor unit(s) (groups)	1 gateway for 128 indoor unit(s) (groups), 20 outdoors (2)	1 unit for 32 indoor unit(s) (groups)	1 iTM for 64 indoor unit(s) (groups) (1)	Up to 512 units with extension modules via Daikin Cloud Plus	Max 64 units via Daikin Cloud Plus	
Automatic control of A/C	●	●	●	●	●	●	●	●	
Centralised control for management		●	●	●	●	●	●	●	
Local control for office staff	●				●	Through web	●	●	
Limit control possibilities for office staff	●	●	●	●	●	●	●	●	
Integrate Daikin units into existing BMS via Modbus		●							
Integrate Daikin units into existing BMS via HTTP						●			
Integrate Daikin units into existing BMS via LonTalk			●						
Integrate Daikin units into existing BMS via BACnet				●					
Energy consumption read out	● (3)					●	●	●	
Monitor energy consumption						●	●	●	
Advanced energy management						● (5)	●	●	
PPD software to distribute used kWh/indoor unit				● (4)		●	●	●	
Integrate Daikin cross pillar products into Daikin BMS						●			
Integrate third party products into Daikin BMS						●	●	●	
Online control							●	●	
Manage multiple sites							●	●	

(1) 7 iTM plus adapters (DGE601A52 and DGE601A53) can be added to have 512 indoor groups and 80 outdoor (systems) | (2) Extension (DAM411B51) needed to have up to 256 indoor unit(s) (groups), 40 outdoors | (3) Not available on all indoor units | (4) via DAM412B51 option | (5) via DCM002A51 option

Shop

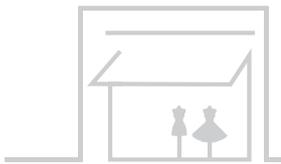

	Unit control	Integrating control				Advanced control				
	BRP069*	BRC1H52 W/S/K	RTD-20	EKMBPP1	KLIC DI V2	EKMBDXB	DCC601A51	DCM601B51	DGE601A51	DGE602A51
	Smartphone control for up to 50 indoor units	1 remote controller for 1 indoor unit (group)	1 gateway for 1 indoor unit (group)	1 gateway for 1 indoor unit (group)	Two additional probes can be connected	1 gateway for max. 64 indoor unit(s) (groups) & 10 outdoors	1 unit for 32 indoor unit(s)	1 iTM for 64 indoor unit(s) (groups) (1)	Up to 512 units with extension modules via Daikin Cloud Plus	Max 64 units via Daikin Cloud Plus
Automatic control of A/C	●	●	●	●	●	●	●	●	●	●
Limit control possibilities for shop staff	●	●	●	●	●	●	●	●	●	●
Create zones within the shop			●	●			●	●	●	●
Interlock with eg. Alarm, PIR sensor			●				● (limited)	●	●	●
Integration into smart home systems	● (5)									
Integrate Daikin units into existing BMS via Modbus			●	●		●				
Integrate Daikin units into existing BMS via KNX					●					
Integrate Daikin units into existing BMS via HTTP							●			
Monitor energy consumption	● (3)	● (3)					●	●	●	●
Advanced energy management							●	●	●	●
Allows free cooling							●			
Voice control	● (4)									
Integrate Daikin products cross pillars into Daikin BMS							●			
Integrate third party products into Daikin BMS							●	●	●	●
Online control	●						● (2)	●	●	●
Manage multiple sites								●	●	●

(1) 7 iTM plus adapters (DGE601A52 and DGE601A53) can be added to have 512 indoor groups and 80 outdoor (systems) | (2) Through own IT set-up (not Daikin cloud server) | (3) Not available on all indoors | (4) Only for BRP069C51, connection to Google Assistant and Amazon Alexa | (5) Only for BRP069C51, contact your local sales representative for an overview of available services.



Onecta App

Now available with voice control


The Onecta App is for those who live their life on the go and who want to manage their Daikin system from their smartphone.




onecta Voice control

To provide users with even more comfort and ease, the Onecta App now offers voice control. This hands-free feature cuts down on clicks to manage units faster than ever before.

Cross-functional and multilingual, voice control pairs well with any smart device, including Google Assistant and Amazon Alexa.

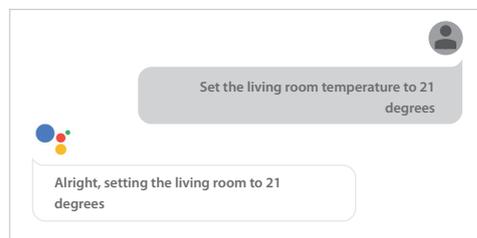

Example of using the voice control via Google Assistant

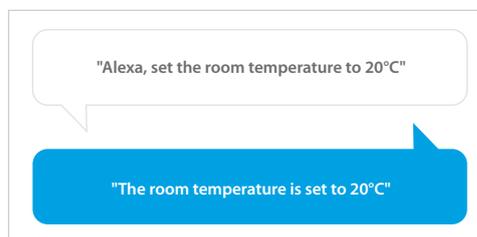

Scan the QR code to download the app now:





Schedule

Set up a programme outlining when the system should operate, and create up to six actions per day.

- Schedule room temperature and operation mode
- Enable holiday mode to save costs




Monitor

Receive a thorough overview of how the system is performing and how much energy it consumes.

- Check the status of the heating system
- Access energy consumption graphs (day, week, month)

Function availability depends on the system type, configuration and operation mode. The app functionality is only available if both the Daikin system and the app have a reliable internet connection.

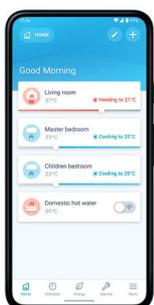

Control

Customise the system to fit your lifestyle and year-round comfort levels.

- Change room temperature
- Turn on powerful mode

For VRV

	Model #	WLAN
VRV 5 indoor units	FXFA-A	Optional: BRP069C51 (1)
	FXZA-A	
	FXKA-A	
	FXDA-A	
	FXSA-A	
	FXMA-A	
	FXHA-A	
	FXUA-A	
	FXAA-A	

(1) Must be combined with BRC1H52W/S/K

For Sky Air

	Model #	WLAN	
Sky Air	FDXM-F9	Optional BRP069C81 (1)	
	FFA-A9		
	FBA-A(9)		
	FDA125A		
	ADEA-A		
	FAA-B		
	FHA-A(9)		
	FUA-A		
	FVA-A		
	FNA-A9		
	FCAG-B		Optional BRP069C82 (2)
	FCAHG-H		
	FDA200-250A		Optional BRP069C82 (3)

(1) Only possible in combination with wired or wireless remote control | (2) EWHAR1 is required if autocleaning panel & Onecta is connected; Cannot be combined with KRP4A53; Only possible in combination with wired or wireless remote control | (3) Cannot be combined with KRP4A51 and KRP2A51

Madoka wired remote controller

The beauty of simplicity.

Madoka



White
RAL9003 (glossy)
BRC1H52W



Silver
RAL 9006 (metallic)
BRC1H52S



Black
RAL 9005 (matte)
BRC1H52K

User-friendly wired remote controller with premium design

Madoka combines refinement and simplicity

- Sleek and elegant design
- Intuitive touch-button control
- Three display options: standard, detailed and **new symbolic view**
- Three colours to match any interior
- Compact, measures only 85 x 85 mm
- Advanced settings **copy function** and commissioning via smartphone
- CO₂ concentration visualisation



reddot award 2018
winner







Madoka Assistant

Simplifies the advanced settings such as schedule or set point limitation


- Visual interface simplifies advanced settings such as schedule setting, energy saving activation, setting restrictions, etc.
- Save field settings and schedules on your phone and upload to multiple controllers, saving time and cost
- Easy and quick commissioning
- Featuring Bluetooth® low energy technology

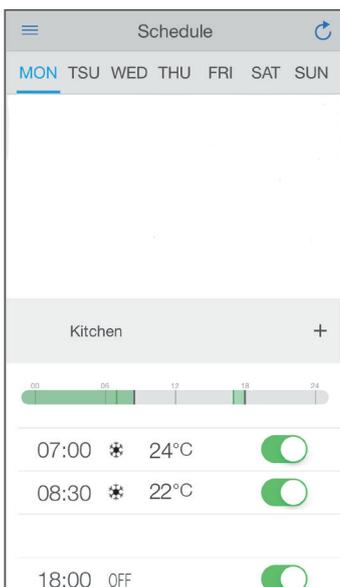


Easy setting of schedules

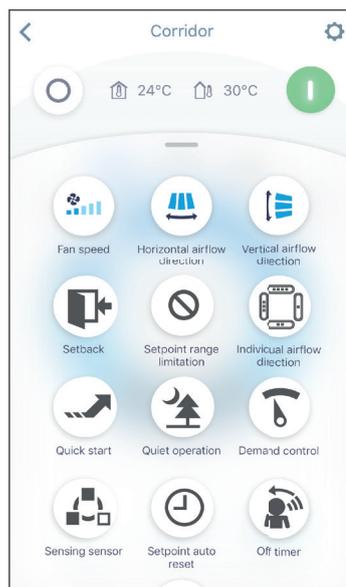

Advanced user settings

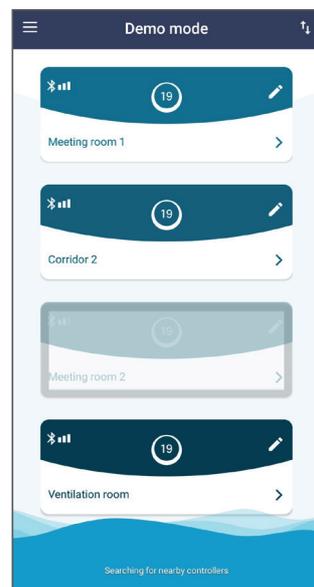

Bluetooth strength indication

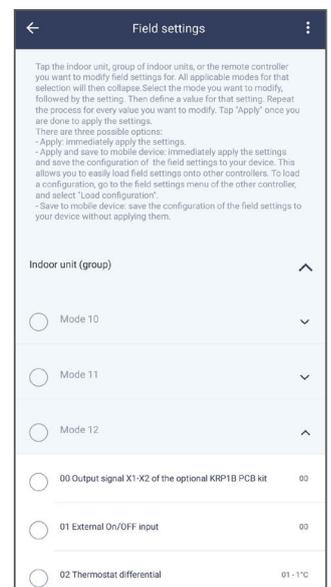

Field settings

Madoka wired remote controller for Sky Air and VRV

A complete redesigned controller focussed to enhance user experience

- Sleek and elegant design
- Intuitive touch-button control
- Three display options: standard, detailed and **symbolic view**
- Direct access to basic functions (on/off, set point, mode, target values, fan speed, louvres, filter icon & reset, error & code)
- Three colours to match any interior
- Compact, measures only 85 x 85 mm
- Real time clock with auto update to daylight saving time

Hotel application features

- Energy saving through key card, window contact integration and set point limitation (BRP7A*)
- Flexible setback function ensures room temperature remains within comfortable limits to ensure guest comfort




BRC1H52W
Symbolic view



BRC1H52S
Standard view



BRC1H52K
CO₂ visualisation

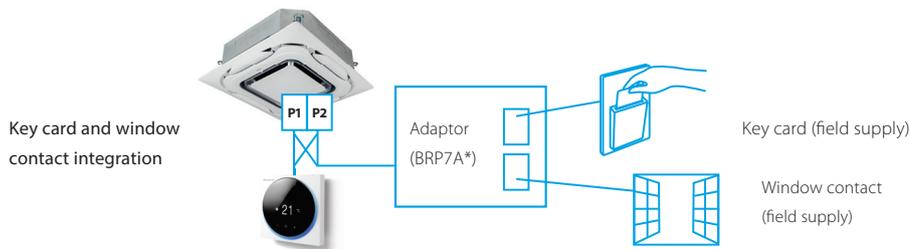

Madoka Assistant: Advanced settings can be easily done via your smartphone



A range of energy-saving functions that can be selected individually

- Temperature range restriction: Save on energy by setting the low temperature limit in cooling mode and the high temperature limit in heating mode (1)
- Setback function
- Adjustable presence detector and floor sensor (available on the Round Flow and Fully Flat Cassettes)
- Automatic temperature reset
- Auto off timer

Other functions

- Three user access levels: Basic user, Advanced and Installer to match user requirements and prevent improper use.
- Save field settings and schedules on your phone and upload to multiple controllers, saving time and cost
- Mark frequently used menu's as favourites for direct access
- Up to three independent schedules can be programmed, allowing you to switch easily between them throughout the year (e.g. summer/winter/mid-season)
- Menu settings can be individually locked or restricted
- The outdoor unit can be set to quiet mode and power consumption limit control by schedule (3)
- Real-time clock that updates automatically for daylight saving

Kilowatt-hour consumption tracking (2)

The kWh indicator displays indicative power consumption for the last day/month/year.



Cost-effective solution for infrastructure cooling applications

- Only in combination with RZAG* / RZQG*
- Duty rotation

After a certain period of time, the operating unit will go into standby and the standby unit will take over, extending the system lifetime. Rotation interval can be set for 6, 12, 24, 72 or 96 hours, as well as weekly.

- Back-up operation: if one unit fails, the other unit will start automatically

(1) Also available in auto cooling/heating changeover mode
 (2) For Sky Air FBA, FCAG and FCAHG pair combinations only
 (3) Only available on RZAG*, RZASG*, RZQG*, RZQSG*

BRC1E53A

User friendly remote control for Sky Air and VRV



Graphical display of indicative electricity consumption (Function available in combination with FBA-A, FCAG and FCAHG)

A series of energy saving functions that can be individually selected

- Demand control (1)
- Temperature range limit
- Setback function
- Presence & floor sensor connection (available on round flow and fully flat cassette)
- kWh indication (2)
- Set temperature auto reset
- Off timer

Other functions

- Up to 3 independent schedules
- Possibility to individually restrict menu functions
- Choice of display between symbol or text
- Real time clock with auto update to daylight saving time
- Built-in backup power for clock (up to 48 hours). Settings are always kept in case of power loss.
- Supports multiple languages:
BRC1E53A: English, German, French, Dutch, Spanish, Italian, Portuguese



Cost-effective solution for infrastructure cooling applications

- > Only in combination with RZAG* / RZQG*

(1) Only available on RZAG*, RZASG*, RZQG*, RZQSG* (2) For Sky Air FBA, FCAG and FCAHG pair combinations only

BRC1D52

Wired remote control for Sky Air and VRV



BRC1D52

- Schedule timer: Five day actions can be set
- Home leave (frost protection): during absence, the indoor temperature can be maintained at a certain level. This function can also switch the unit ON/OFF
- User friendly HRV function, thanks to the introduction of a button for ventilation mode and fan speed
- Immediate display of fault location and condition
- Reduction of maintenance time and costs

BRC4*/BRC7*

Infrared remote control



BRC4*/BRC7*

Operation buttons: ON / OFF, timer mode start / stop, timer mode on / off, programme time, temperature setting, air flow direction (1), operating mode, fan speed control, filter sign reset (2), inspection (2)/ test indication (2)
Display: Operating mode, battery change, set temperature, air flow direction (1), programmed time, fan speed, inspection / test operation (2)

- (1) Not applicable for FXDQ, FXSQ, FXNQ, FBDQ, FDXM, FBA
- (2) For FX** units only
- (3) For all features of the remote control, refer to the operation manual

DCC601A51

Advanced centralised controller



- Intuitive and user-friendly interface
- Flexible concept for stand alone applications
- Total solution thanks to integration of 3rd party equipment

Local solution

- Offline centralised control
- Stylish optional screen fits any interior

System layout





CENTRALISED CONTROL SYSTEMS

Total solution

- Total solution thanks to a large integration of Daikin products and 3rd party equipment
- Connect a wide range of units (Split, Sky Air, VRV, Ventilation, Biddle air curtains)
- Simply control your entire building centrally
- Increased customer shopping experience by better management of your shop comfort level


User friendly touch control

- Stylish Daikin supplied optional screen for local control fits any interior
- Intuitive and user-friendly interface
- Full solution with simple control
- Easy commissioning

Flexible

- Pulse/digital inputs for 3rd party equipment such as kWh meters, emergency input, window contact, ...
- Control up to 32 indoor units per controller and 320 units per site

(1) only available in combination with certain indoor units

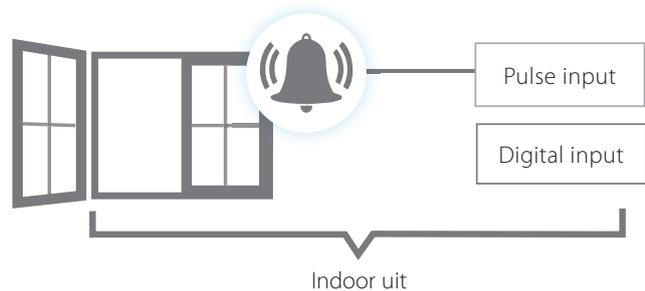

Functions overview

		Local solution
Languages		Depends on local device
System layout	N° of connectable indoor units Multiple sites control	32
Monitoring & control	Basic control functions (ON/OFF, mode, filter sign, setpoint, fan speed, ventilation mode, room temperature, ...)	●
	Remote control prohibition	●
	All devices ON/OFF	●
	Zone control	
	Group control	●
	Weekly schedule	●
	Yearly schedule	
	Interlock control	●
	Set point limitation	
	Visualisation of energy use per operation mode	
Connectable to	DX split, Sky Air, VRV	●
	Modular L Smart, VAM, VKM ventilation	●
	Air curtains	●

For available Daikin Cloud Service options refer to the option list

DCM601B51

Mini BMS with full integration across all product pillars

- Price competitive mini BMS
- Cross-pillar integration of Daikin products
- Integration of third party equipment

 Intelligent Manager



Download the WAGO selection tool from my.daikin.eu


- Easy selection of WAGO materials
- Material list creation
- Time saving
 - Includes wiring schemes
 - Contains commissioning/preset data for iTM



Check on
You Tube

<https://www.youtube.com/DaikinEurope>


System overview

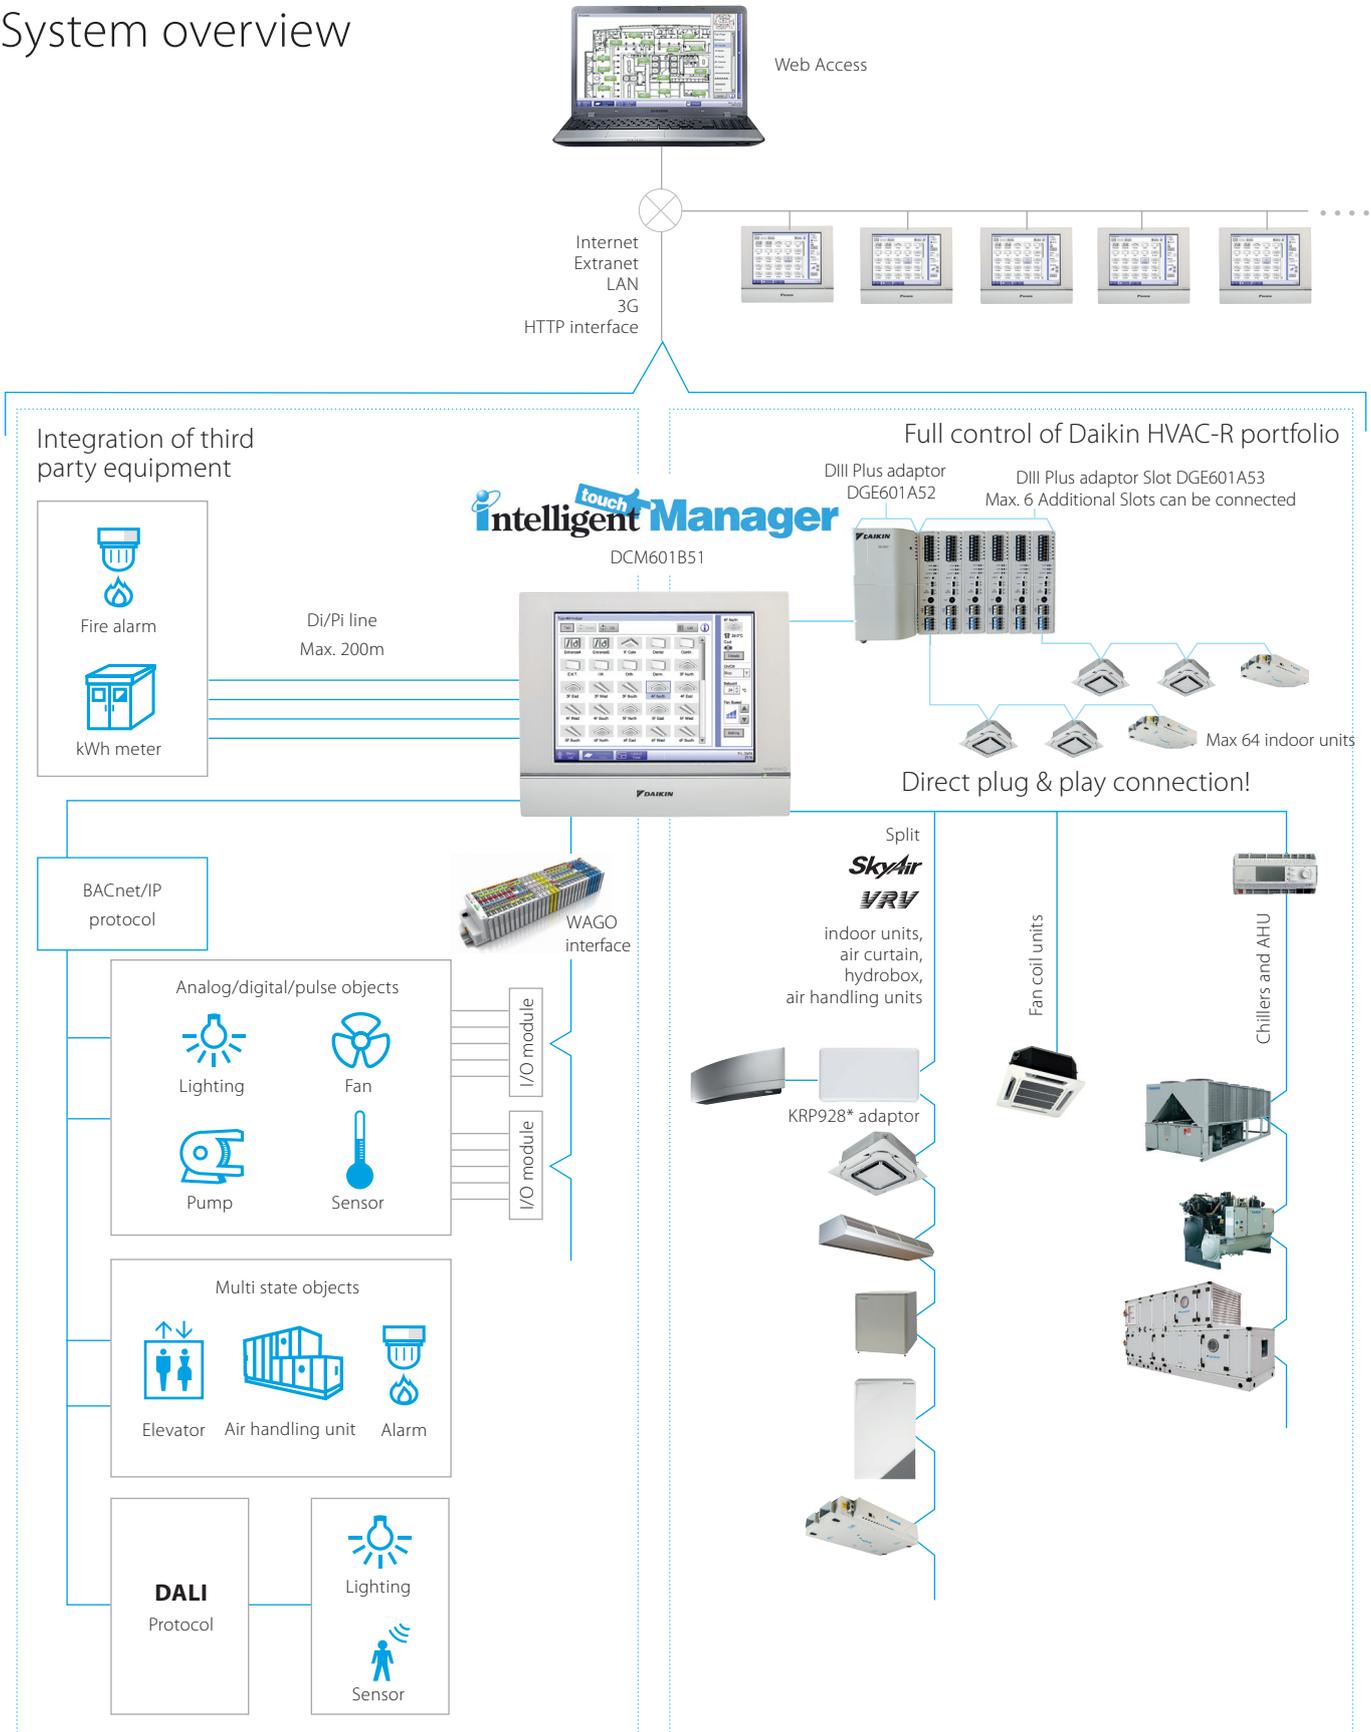

CENTRALISED CONTROL SYSTEMS

User friendliness

- Intuitive user interface
- Visual lay out view and direct access to indoor unit main functions
- All functions direct accessible via touch screen or via web interface
- Simplified electrical wiring, only one power supply & one connection wiring required

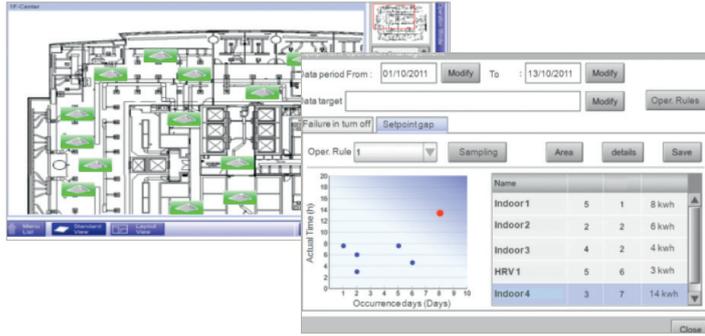

Smart energy management

- Monitoring if energy use is according to plan
- Helps to detect origins of energy waste
- Powerful schedules guarantee correct operation throughout the year
- Save energy by interlocking A/C operation with other equipment such as heating
- Peak Power Cut off Control: Activating this feature in schedule function allows users to operate the outdoor unit in 4 settings i.e. 100%,70%, 40% and 0%


Flexibility

- Cross-pillar integration (heating, air conditioning, applied systems, refrigeration, air handling units)
- BACnet protocol for 3rd party products integration
- I/O for integration of equipment such as lights, pumps... on WAGO modules
- Modular concept for small to large applications
- Control up to 512 indoor unit groups via one ITM and combine multiple ITM via web interface



Easy servicing and commissioning

- Remote refrigerant containment check reducing on site visit
- Simplified troubleshooting
- Save time on commissioning thanks to the pre-commissioning tool
- Auto registration of indoor units

Plug & play

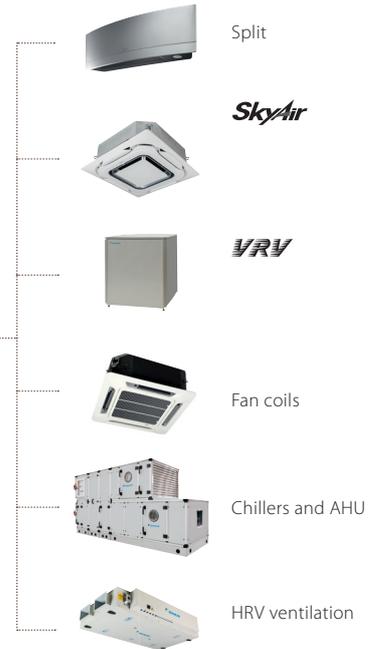

Flexibility in size
64 up to 512 groups

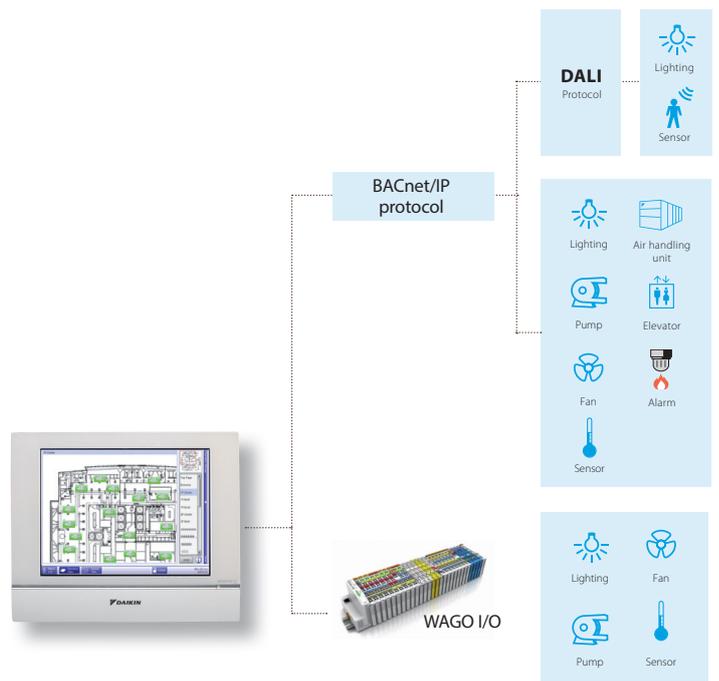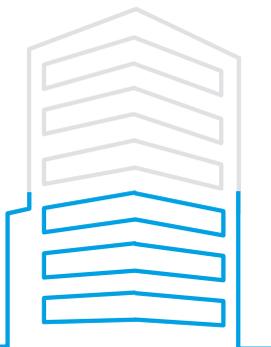

Functions overview

Languages

- English
- French
- German
- Italian
- Spanish
- Dutch
- Portuguese

Management

- Web access via html 5
- Power Proportional Distribution (option)
- Operational history (malfunctions, ...)
- Smart energy management
 - monitor if energy use is according to plan
 - detect origins of energy waste
- Setback function
- Sliding temperature

WAGO Interface

- Modular integration of 3rd party equipment
- Large variety of input and outputs available. For more details refer to the options list

Open http interface

- Communication to any third party controller (domotics, BMS, etc.) is possible via http open interface (http option DCM007A51)

System layout

- Up to 512 unit groups can be controlled (ITM + 7 iTM Plus adapters)

Control

- Individual control (512 groups)
- Schedule setting (Weekly schedule, yearly calendar, seasonal schedule)
- Interlock control
- Setpoint limitation
- Temperature limit
- Schedule function to activate quiet operation mode on outdoor unit

DALI integration

- Control and monitor the lights
- Easier facility management: receive error signal when light or light controller has a malfunction
- Flexible approach and less wiring needed, compared to classic light scheme
- Easier to make groups and control scenes
- Connection between intelligent Touch Manager and DALI through WAGO BACnet / IP interface

Connectable to

- DX Split, Sky Air, VRV
- HRV
- Chillers (via MT3-EKCBACIP controller)
- Daikin AHU (via MT3-EKCBACIP controller)
- Fan coils
- LT and HT hydroboxes
- Biddle Air curtains
- WAGO I/O
- BACnet/IP protocol
- Daikin PMS interface (option DCM010A51)





Introduction to Daikin Cloud Plus



Daikin Cloud Plus is a cloud-based remote control and monitoring solution for Daikin commercial HVAC installations. Using enhanced control, monitoring and predictive logic, Daikin Cloud Plus provides real-time data and support from Daikin experts to help you identify cost-saving opportunities, increase the lifetime of your equipment and reduce the risk of unexpected issues.

The ultimate control over your indoor climate and air quality

- Save energy & reduce costs
- Enhance comfort & satisfaction
- Smart control from anywhere
- Ensure healthy indoor environment
- Maximize uptime (remote prediction, monitor & diagnose)
- Integrates easily with building systems

Supporting your business and helping you succeed

- Maximize comfort and satisfaction of your staff, customers, tenants, ...
- Save energy & reduce costs
- Facilitate your sustainability goals
- Cost effective control and energy monitoring of HVAC and other facility systems such as lighting
- Limits the necessity for on-site interventions
- Minimizes downtime and engineer call outs

Benefits

Easy control of multiple sites

- Remote control and manage sites remotely
- Floor plan control per site
- Multi-site access
- Permission based access

Save energy & meet sustainability goals


- Monitor energy consumption trends
- Smart control of systems to save energy
- Insights to improve HVAC system performance
- Reduced costs
- Contribute to carbon neutrality

Connectivity and integration possibilities

- Simple to advanced edge controllers
- Various interfaces
- Advanced security

Manage, monitor and control indoor climate from anywhere

- Limits the necessity for on-site control
- Minimizes downtime and engineer call outs
- Optimized maintenance
- Monitoring of indoor air quality

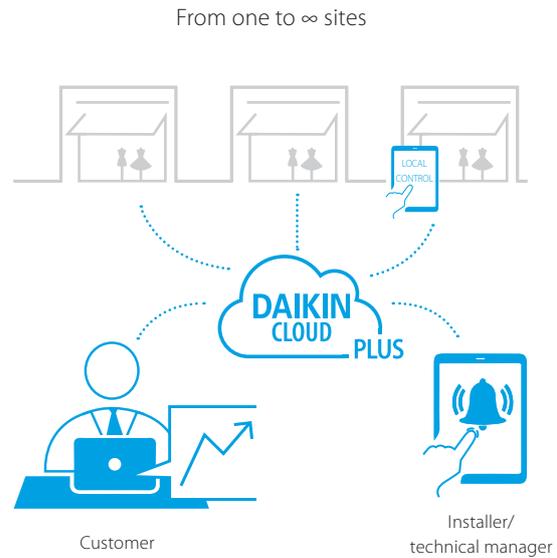

Main applications

Light commercial and commercial systems



Non-food retailers



Hotels



Offices



Schools



Healthcare


Ranges

VRV and Sky Air, air curtains. Integration through I/O. BACnet client available in 2024.


- Direct integration with lights and other facility systems using Daikin Cloud Plus as master of the building
- Integration with BMS, Daikin Cloud Plus as part of the system




Cloud application interface

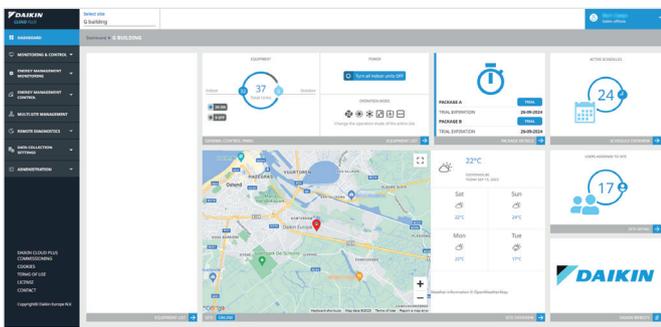


Dashboard

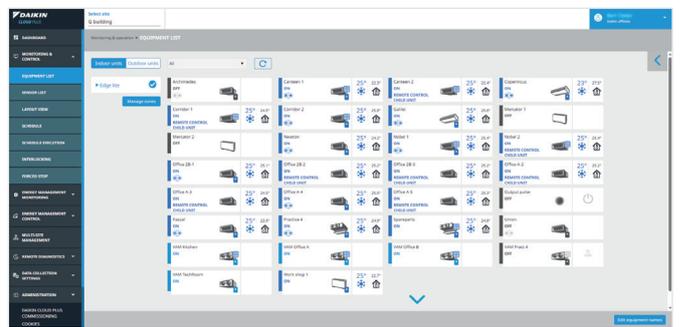

Equipment List

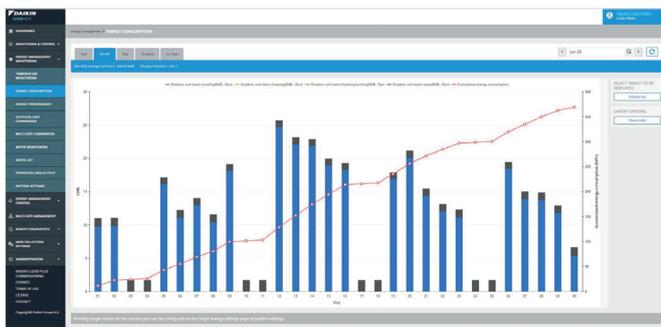

Energy Consumption

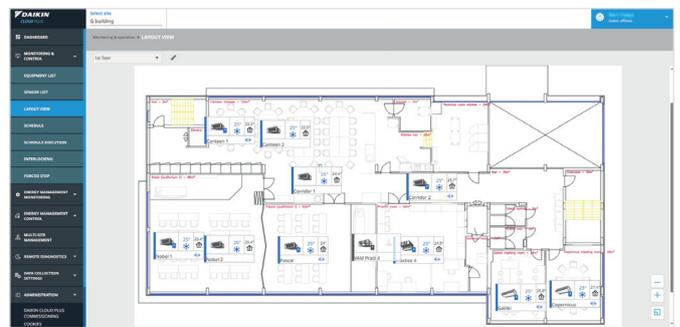

Layout View

* Features depend on unit compatibility and region.
Images are indicative and might change if the product evolves.



What can Daikin Cloud Plus do for you?

Were you aware that HVAC systems account for as much as 40% of the total energy consumption in buildings?

- Daikin Cloud Plus logs historical data and allows you to monitor, compare HVAC consumption
- Daikin Cloud Plus allows you to integrate with energy meters so you can monitor not only HVAC but also other energy consumers (facility, gas, water, ...)
- Daikin Cloud Plus allows you to configure and control the system smarter to save energy with restrictions, interlocking rules, schedules, etc.

Are you interested in tracking the progress of sustainability goals or the sustainability policies you put into action?

- Daikin Cloud Plus allows you to monitor, analyse and compare HVAC energy consumption
- Daikin Cloud Plus allows you to remote control and manage new cooling or heating related policies (e.g. heating setpoint of 1° lower)

How do you ensure maximum comfort and minimal interruptions of cooling and heating?

- Daikin Cloud Plus can predict failures to anticipate and prevent unplanned downtime of the heating or cooling
- Daikin Cloud Plus real-time system error notifications to ensure a direct response in case something goes wrong
- Daikin Cloud Plus logs all events in the system and visualized the temperature evolutions
- Daikin Cloud Plus remote system access to indoor and outdoor unit operational data reduces engineering visits on site

How to manage and remote control one or multi-site building estate and apply uniformization in climate control?

- Daikin Cloud Plus allows you to monitor, manage and control multiple sites from anywhere
- Daikin Cloud Plus allows to compare multiple sites

How give peace of mind about indoor air quality?

- Daikin Cloud Plus integrates with IAQ sensors and can take automated actions or provide warnings where needed
- Daikin Cloud Plus allows to monitor and analyse the indoor air quality in order to take necessary actions

How to control my other systems at the facility?

- Daikin Cloud Plus provides possibilities to integrate with other facility systems as a stand-alone system, such as integration with lighting system
- Daikin Cloud Plus provides possibilities to integrate with other facility management systems like BMS or BEMS

Main features



Remote Control, Demand Control and Scheduling

Control and monitor the climate of your buildings at any time, from anywhere. From a web browser, it is possible to adjust your units' parameters, including temperature setpoints, fan speeds, heating or cooling operation modes and much more. All these parameters can be scheduled for maximum convenience during weekdays, weekends, holidays, office hours, opening hours, etc. Schedules are stored on the controller so the units are functioned as scheduled despite the internet connection. Additionally, units can be positioned in a visual floor plan to make it easier to locate an unit and change the setpoints remotely. Demand control reduces the peak consumption with minimal impact on comfort by predicting future needs and adjusting the operational capacity of the units accordingly.



Multi-site Management

Get a map view of all your sites with status alerts, benchmark and compare sites to one another. From the map view, you can get direct access to each site to monitor and control the site remotely. This helps to reduce site visits and get insights that lead to opportunities for reducing operational costs while maintaining great comfort levels.



Building Integration

Not only HVAC but other facilities in the buildings can be controlled from the central platform. For example, the lighting system can be included in schedules and integrated with interlocking to have one single point of control and optimize energy efficiency for your buildings.



Energy Monitoring

Get detailed visualization and export energy data of your buildings. Powerful graphs, comparisons and visualisations are available to help you assess the performance and potential improvements to reduce excessive energy and lower your energy costs. Next to detailed energy data of HVAC systems, it is possible to add external meters to measure consumption of lighting and water systems.



Alarm History & Email Notification

Get detailed overview of alarms relating to your sites and real-time status of the alarms. Receive alarms notification email with access to alarm details on Daikin Cloud Plus platform.



Power Consumption Distribution

Proportional distribution of power consumption allows you to calculate the consumption for specific areas in your buildings. For example, you can calculate how much power is used by a tenant on a certain floor. For this function, energy meters are required.



Interlocking

Smart rules can be integrated to optimize the operation of your units by setting specific triggers and scheduling necessary actions when these conditions happen. Through "if this, then that" principle, both the comfort of users and the efficiency of units can be optimized. For example, a rule can be: "Trigger: if a window is open then take the Action: after 5 min turn off the air conditioner". Furthermore, the system enables setting restrictions remotely. For example, a user can only change the temperature between certain limits, which gives users control over their comfort while restricting extreme settings.



Remote Field Settings

Field settings of outdoor units can be adjusted remotely. This allows technicians and building operators to adjust, configure and monitor outdoor units from a distance, reducing the need to be at the location, save time and costs associated with travel, labour and maintenance, increase efficiency and overall performance.



Site History

Trace schedule trigger units or manual actions that were done on the units and sites. Past events, changes, and adjustments, enabling you to identify trends, gauge performance improvements, and strategize for the future. By drawing from historical data, you'll make informed decisions, adapt strategies, and drive continuous enhancements, revolutionizing your HVAC management approach.



Prediction & Email Notification

Early fault predictive algorithms help to prevent major failures. Based on the alarm and operational data, unit-specific prediction logic allows you to preventively, see whether a unit could run into issues. Prediction logic alarms will be generated in this case, allowing early warnings and ensuring smooth operation.



Operational Data Access

Effortlessly monitor, analyse, and fine-tune HVAC parameters remotely, enabling you to make informed decisions on the go. Real-time access to operational data, performance metrics, and energy usage empowers you to adjust settings, troubleshoot anomalies, and maintain peak efficiency, all while minimizing the need for physical intervention. Operational data can be downloaded for further analysis and periodical reporting.



Indoor & Outdoor Unit Analysis

Dive into comprehensive insights into each unit's performance, energy consumption, and environmental impact. Seamlessly compare data across units, pinpointing inefficiencies and optimizing your system's overall effectiveness. With a holistic view of indoor and outdoor units, you'll achieve unprecedented levels of operational harmony and energy savings.

Use cases



For retailers

- Remote control and monitoring of all units in different shops from a centralized platform
- Testing and validating parameters and standardizing settings for shops
- Energy visualizations and exports
- Remote control over lightings



For hotels

- Setting temperature ranges for rooms to avoid extreme settings by guests
- Energy monitoring
- Scalability made easier thanks to standardized system settings



For offices

- Setting temperature ranges for office areas to avoid extreme settings by staff
- Detailed energy monitoring and export of data per tenant of different office areas
- Estimation of energy consumption and setting the right pricing for each tenant
- Scheduling and restrict controls to avoid energy waste and save energy costs

* Features depend on unit compatibility and region.

Images are indicative and might change if the product evolves.



CENTRALISED CONTROL SYSTEMS

Controllers & accessories

Controllers and their connections

Composition



Internet Connection

USER INTERFACE



Remote control and monitoring



IAQ control and monitoring



Maintenance and diagnostics



Multi-site management



Energy control, monitoring and insights



Demand Control



BUILDING

Limited local app (optional)

Local fallback function in case of internet disconnection



Other connections
WAGO, BACnet, Di/Pi

Edge controller and adapters

1.



DC+ Edge
(DGE601A51)



DGPf DIII
Plus ADP
(DGE601A52)

+



DGPf DIII
Plus ADP SLOT
(DGE601A53)

2.



DC+ Edge lite
(DGE602A51)



Controller Features

				DGE601A51 (Edge)	DGE602A51 (Edge lite)	
Controller specification	I/F	DIII	port	2	1	
			(Indoor unit connection / port)	64	64	
		Ethernet	Internet	1	1	
			2nd LAN port (BACnet)	1(N.A. yet)	0	
		RS485	WAGO	1	0	
		ADP	For DIII NET Plus ADP	1	0	
			(Maximum expansion)	6		
		Contact	Di/Pi	8	4	
			Do	3	2	
		Number of connection	DIII management points	Standard	128	64
				Maximum with ADP	512	-
			Total management points	Including AC and other facilities	1,000	76

Individual Modbus interfaces

RTD-RA

- Modbus interface for monitoring and control of residential indoor units

NEW DAIKIN MODBUS ADAPTOR SIMPLE (EKMBPP1)

- Modbus interface for monitoring & control of Sky air, VRV & ventilation units.
- Smart grid control for Sky air indoor units.

RTD-10

- Advanced integration into BMS of Sky Air, VRV, VAM and VKM through either:
 - Modbus
 - Voltage (0-10V)
 - Resistance
- Duty/standby function for server rooms

RTD-20

- Advanced control of Sky Air, VRV, VAM/VKM and air curtains
- Clone or independent zone control
- Increased comfort with integration of CO₂ sensor for fresh air volume control
- Save on running costs via
 - pre/post and trade mode
 - set point limitation
 - overall shut down
- PIR sensor for adaptive deadband

RTD-HO

- Modbus interface for monitoring and control of Sky Air, VRV, VAM and VKM
- Intelligent hotel room controller

RTD-W

- Modbus interface for monitoring and control of Daikin Altherma Flex Type, VRV HT hydrobox and small inverter chiller

NEW Daikin HomeHub EKRHH


- Modbus RTU/IP interface for Daikin Altherma 3
- Integrate the Daikin Altherma 3 air-to-water heat pump in a home automation or energy management system

DCOM-LT/MB

- Modbus interface of Daikin Altherma air-to-water heat pumps, hybrid heat pumps and ground source heat pumps

DCOM/LT-IO

- Voltage & resistance control in addition to Modbus

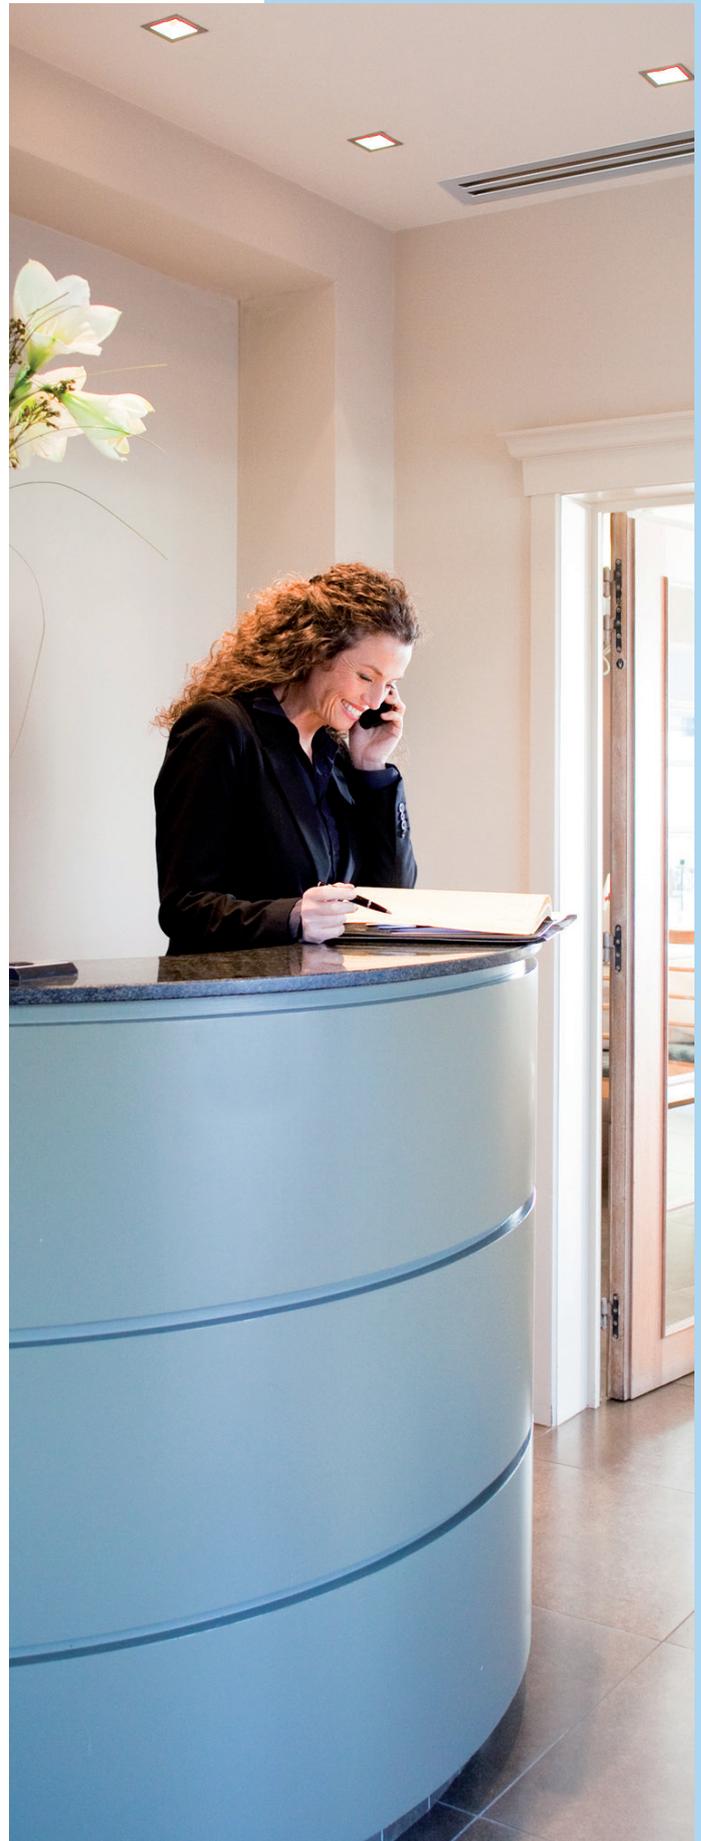

Overview functions



Main functions	RTD-RA	EKMBPP1	RTD-10	RTD-20	RTD-HO
Dimensions H x W x D mm	80 x 80 x 37,5	100 x 100 x 20		100 x 100 x 22	
Key card + window contact					✓
Set back function	✓				✓
Prohibit or restrict remote control functions (setpoint limitation, ...)	✓	✓	✓	✓**	✓
Modbus (RS485)	✓	✓	✓	✓	✓
Group control	✓(1)	✓	✓	✓	✓
0 - 10 V control			✓	✓	
Resistance control			✓	✓	
IT application	✓		✓		
Heating interlock			✓		
Output signal (on/defrost, error)			✓	✓****	✓
Retail application				✓	
Partitioned room control				✓	
Air curtain		✓***	✓***	✓	

(1): By combining RTD-RA devices

Control functions	RTD-RA	EKMBPP1	RTD-10	RTD-20	RTD-HO
On/Off	M,C	M	M,V,R	M	M*
Set point	M	M	M,V,R	M	M*
Mode	M	M	M,V,R	M	M*
Fan	M	M	M,V,R	M	M*
Louver	M	M	M,V,R	M	M*
HRV Damper control		M	M,V,R	M	
Prohibit/Restrict functions	M	M	M,V,R	M	M*
Forced thermo off	M				
Smart Grid Control		M			

Monitoring functions	RTD-RA	EKMBPP1	RTD-10	RTD-20	RTD-HO
On/Off	M	M	M	M	M
Set point	M	M	M	M	M
Mode	M	M	M	M	M
Fan	M	M	M	M	M
Louver	M	M	M	M	M
RC temperature		M	M	M	M
RC mode		M	M	M	M
N° of units		M	M	M	M
Fault	M	M	M	M	M
Fault code	M	M	M	M	M
Return air temperature (Average/Min/Max)	M	M	M	M	M
Filter alarm		M	M	M	M
Termo on	M	M	M	M	M
Defrost		M	M	M	M
Coil In/Out temperature	M	M	M	M	M



Main functions	RTD-W
Dimensions H x W x D mm	100x100x22
On/off prohibition	✓
Modbus RS485	✓
Dry contact control	✓
Output signal (operation error)	✓
Space heating / cooling operation	✓
Domestic hot water control	✓
Smart Grid control	

Control functions	RTD-W
On/Off Space heating/cooling	M,C
Set point leaving water temperature (heating / cooling)	M,V
Room temperature setpoint	M
Operation mode	M
Domestic Hot water ON	
Domestic Hot Water reheat	M,C
Domestic Hot Water reheat setpoint	
Domestic Hot Water storage	M
Domestic Hot Water Booster setpoint	
Quiet mode	M,C
Weather dependent setpoint enable	M
Weather dependent curve shift	M
Fault/pump info relay choice	
Control source prohibition	M

Smart grid mode control	RTD-W
Prohibit Space heating/cooling	
Prohibit DHW	
Prohibit Electric heaters	
Prohibit All operation	
PV available for storage	
Powerful boost	

Monitoring functions	RTD-W
› On/Off Space heating/cooling	M,C
› Set point leaving water temperature (H/C)	M
› Room temperature setpoint	M
› Operation mode	M
› Domestic Hot Water reheat	M
› Domestic Hot Water storage	M
› Number of units in the group	M
› Average leaving water temperature	M
› Remocon room temperature	M
› Fault	M,C
› Fault code	M
› Circulation pump operation	M
› Flow rate	
› Solar pump operation	
› Compressor status	M
› Desinfection operation	M
› Setback operation	M
› Defrost/ start up	M
› Hot start	
› Booster Heater operation	
› 3-Way valve status	
› Pump running hours accumulated	M
› Compressor running hours accumulated	
› Actual leaving water temperature	M
› Actual return water temperature	M
› Actual DHW tank temperature (*)	M
› Actual refrigerant temperature	
› Actual outdoor temperature	M

Control functions	EKRHH
Leaving water main heating or cooling setpoint	✓
Operation mode	✓
Space heating/cooling ON/OFF	✓
Room thermostat control heating or cooling setpoint	✓
Room thermostat ON/OFF	✓
Quiet mode ON/OFF	✓
DHW reheat set point	✓
DHW reheat ON/OFF	✓
DHW powerful mode ON/OFF	✓
Weather dependent mode and offset	✓
SG operation mode	✓
Power limit during recommended on / buffering	✓
General power limit	✓

Monitoring functions	EKRHH
Error code	✓
Circulation pump running	✓
Compressor running	✓
Backup heater running	✓
Disinfection operation	✓
Defrost/startup/hot start	✓
Operation mode	✓
Leaving water temperature PHE/BUH	✓
Return water temperature	✓
Domestic hot water temperature	✓
Ambient temperature	✓
Liquid refrigerant temperature	✓
Flowrate	✓
Room temperature	✓
Heat pump power consumption	✓
DHW operation / space heating operation	✓
Leaving water temperature lower and upper limit	✓


M: Modbus / R: Resistance / V: Voltage / C: control | * : only when room is occupied / ** : setpoint limitation / (*) if available | ***: no fan speed control on the CVV air curtain / ****: run & fault

EKMBDXB

DIII-net Modbus interface

Integrated control system for seamless connection between Split, Sky Air, VRV and small inverter chillers and BMS systems

- Communication via Modbus RS485 protocol
- Detailed monitoring and control of the VRV total solution
- Easy and fast installation via DIII-net protocol
- As the Daikin DIII-net protocol is being used, only one modbus interface is needed for a group of Daikin systems (up to 10 outdoor units systems).

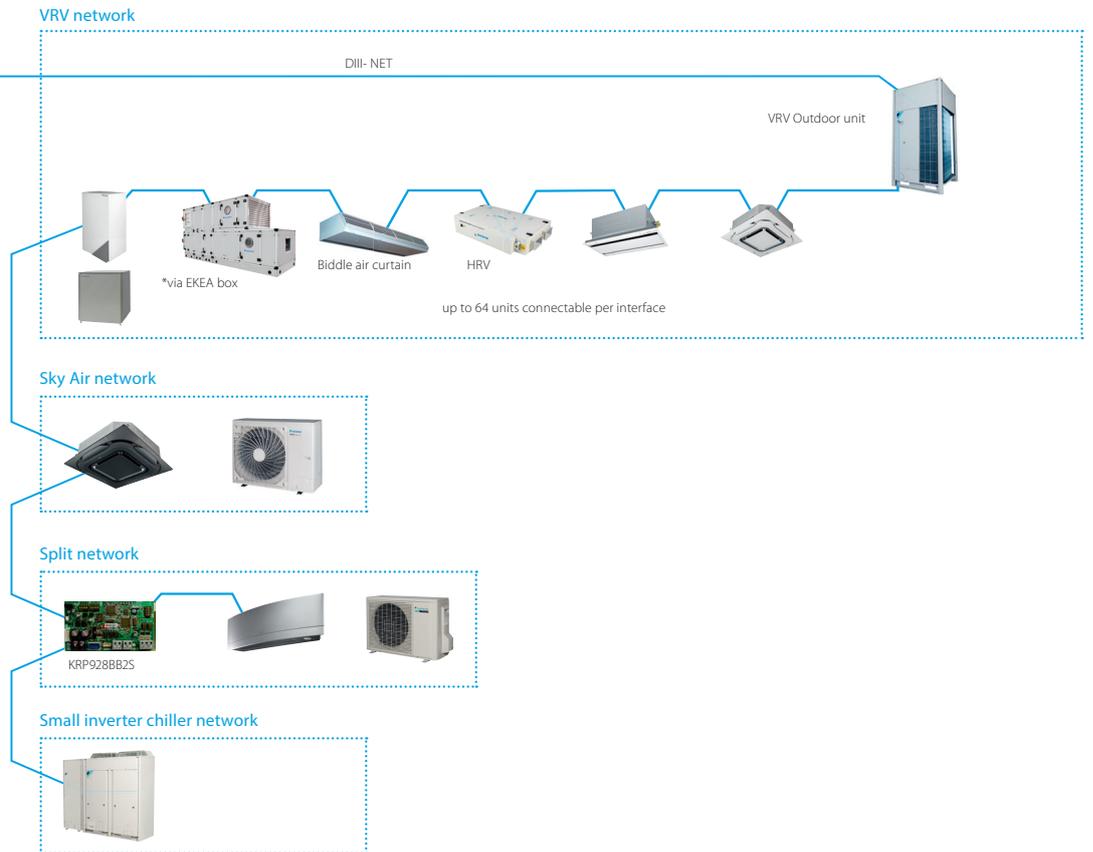

Building control network


- Fire alarm
- Security
- Power supply facility
- Lighting
- Pump
- Elevator

			EKMBDXB7V1	
Maximum number of connectable indoor units			64	
Maximum number of connectable outdoor units			10	
Communication	DIII-NET - Remark		DIII-NET (F1F2)	
	Protocol - Remark		2 wire; communication speed: 9,600 bps or 19,200 bps	
	Protocol - Type		RS485 (modbus)	
	Protocol - Max. Wiring length	m	500	
Dimensions	HeightxWidthxDepth	mm	124x379x87	
Weight			kg	2.1
Ambient temperature - operation	Max.	°C	60	
	Min.	°C	0	
Installation			Indoor installation	
Power supply	Frequency	Hz	50	
	Voltage	V	220-240	


KNX interface

Integration of Split, Sky Air and VRV in HA/BMS systems

Connect split indoor units to KNX interface for Home Automation system

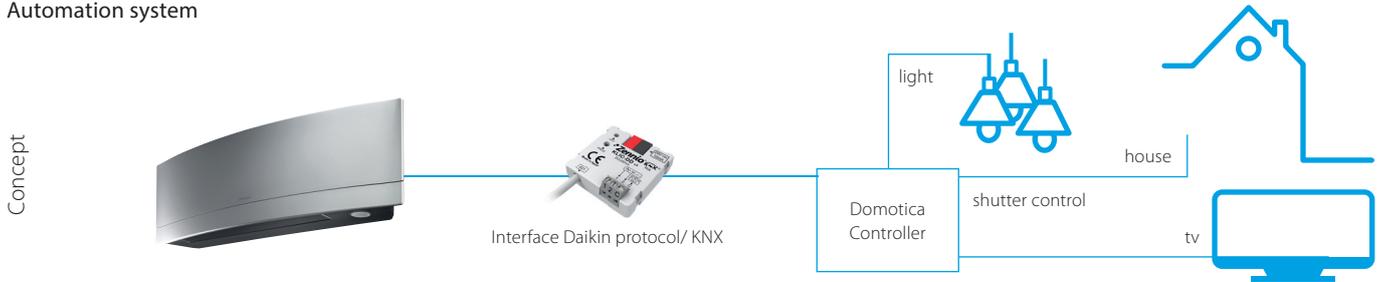

Connect Sky Air / VRV indoor units to KNX interface for BMS integration

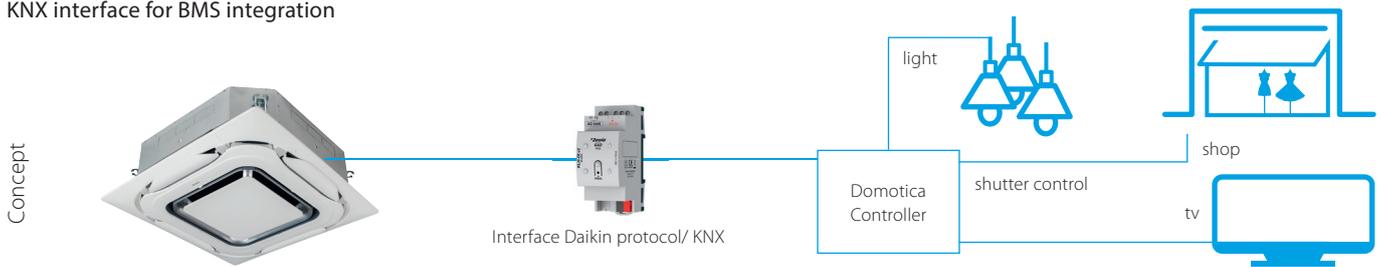

KNX interface line-up

The integration of Daikin indoor units through the KNX interface allows monitoring and control of several devices, such as lights and shutters, from one central controller. One particularly important feature is the ability to programme a 'scene'

- such as "Home leave" - in which the end-user selects a range of commands to be executed simultaneously once the scenario is selected. For instance in "Home leave", the air conditioner is off, the lights are turned off, the shutters are closed and the alarm is on.

KNX interface for

	 KLIC-DDV3 size 45x45x15mm Split	 KLIC-DI_V2 size 90x60x35mm Sky Air	 KLIC-DI_V2 size 90x60x35mm VRV
Basic control			
On/Off	•	•	•
Mode	Auto, heat, dry, fan, cool	Auto, heat, dry, fan, cool	Auto, heat, dry, fan, cool
Temperature	•	•	•
Fan speed levels	3 or 5 + auto	2 or 3	2 or 3
Swing	Stop or movement	Stop or movement	Swing or fixed positions (5)
Advanced functionalities			
Error management	Communication errors, Daikin unit errors		
Scenes	•	•	•
Auto switch off	•	•	•
Temperature limitation	•	•	•
Initial configuration	•	•	•
Master and slave configuration		•	•

PMS Interface

Hotel interface connecting Daikin HVAC Property Management Systems




Room view showing room status: check-in, check-out, pre-heating / cooling status, room temperature and A/C status

HVAC settings can be easily observed and changed by the reception desk

Multiple room types (bedroom, meeting room, ...) can be defined with customized A/C settings for each type

Simplified configuration of Daikin PMS interface

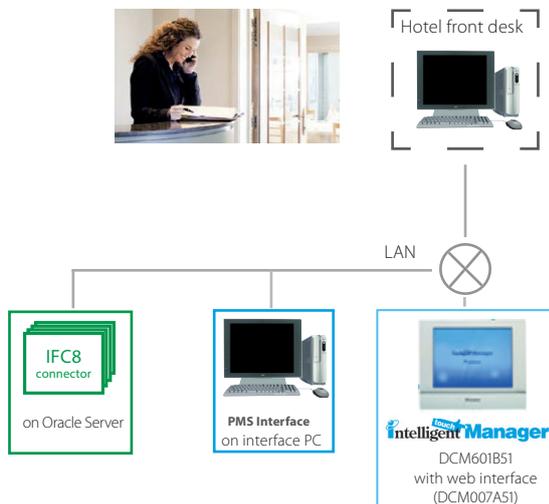


Features

- User-friendly interface for easy front desk support in hotels, conference centers, ...
- Compatible with Oracle Opera PMS (formerly known as Micros Fidelio)
- Automated push of indoor unit settings based on the Opera PMS Check-In and Check-Out commands
- Energy saving thanks to the possibility to limit temperature setpoint
- Up to 5 customized operation profiles based on weather conditions
- Available in 23 languages
- Up to 2,500 units / rooms can be managed
- The Daikin PMS is using the FIAS protocol, designed by Oracle, to interface with the Property Management System.


Hotel case example:

- On check-in the HVAC for the room is automatically switched on
- On check-out the HVAC for the room is automatically switched off.
- Increased hotel customer experience by pre-heating / cooling of booked rooms

Hotel front desk

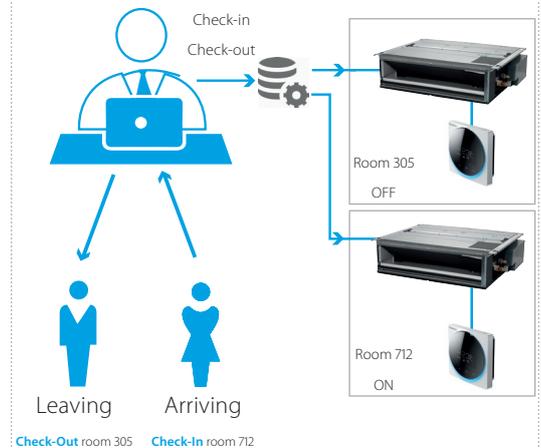

Daikin HVAC network

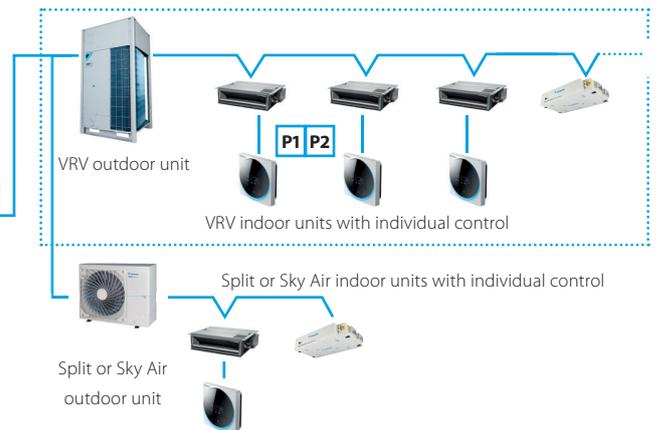


DMS502A51

BACnet Interface

Integrated control system for seamless connection between VRV, applied systems, air handling units and BMS systems

- Interface for BMS system
- Communication via BACnet protocol (connection via Ethernet)
- Unlimited site size
- Easy and fast installation
- PPD data is available on BMS system (only for VRV)

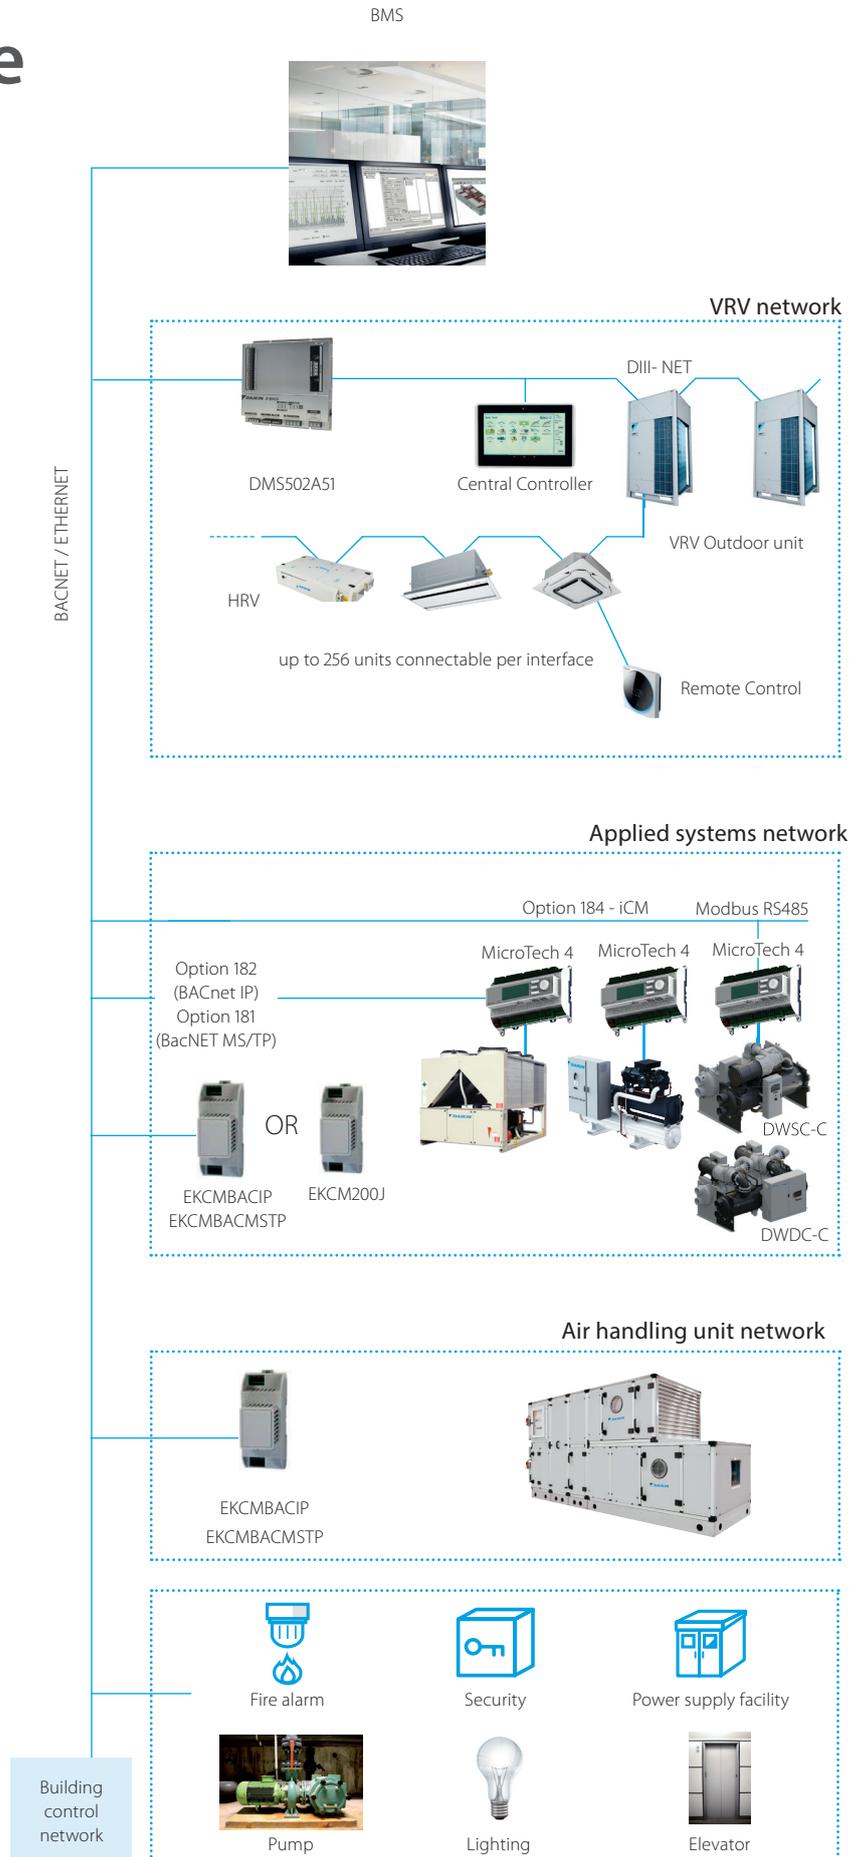


DMS504B51

LonWorks Interface

Open network integration of VRV monitoring and control functions into LonWorks networks

- Interface for Lon connection to LonWorks networks
- Communication via Lon protocol (twisted pair wire)
- Unlimited sitesize
- Quick and easy installation

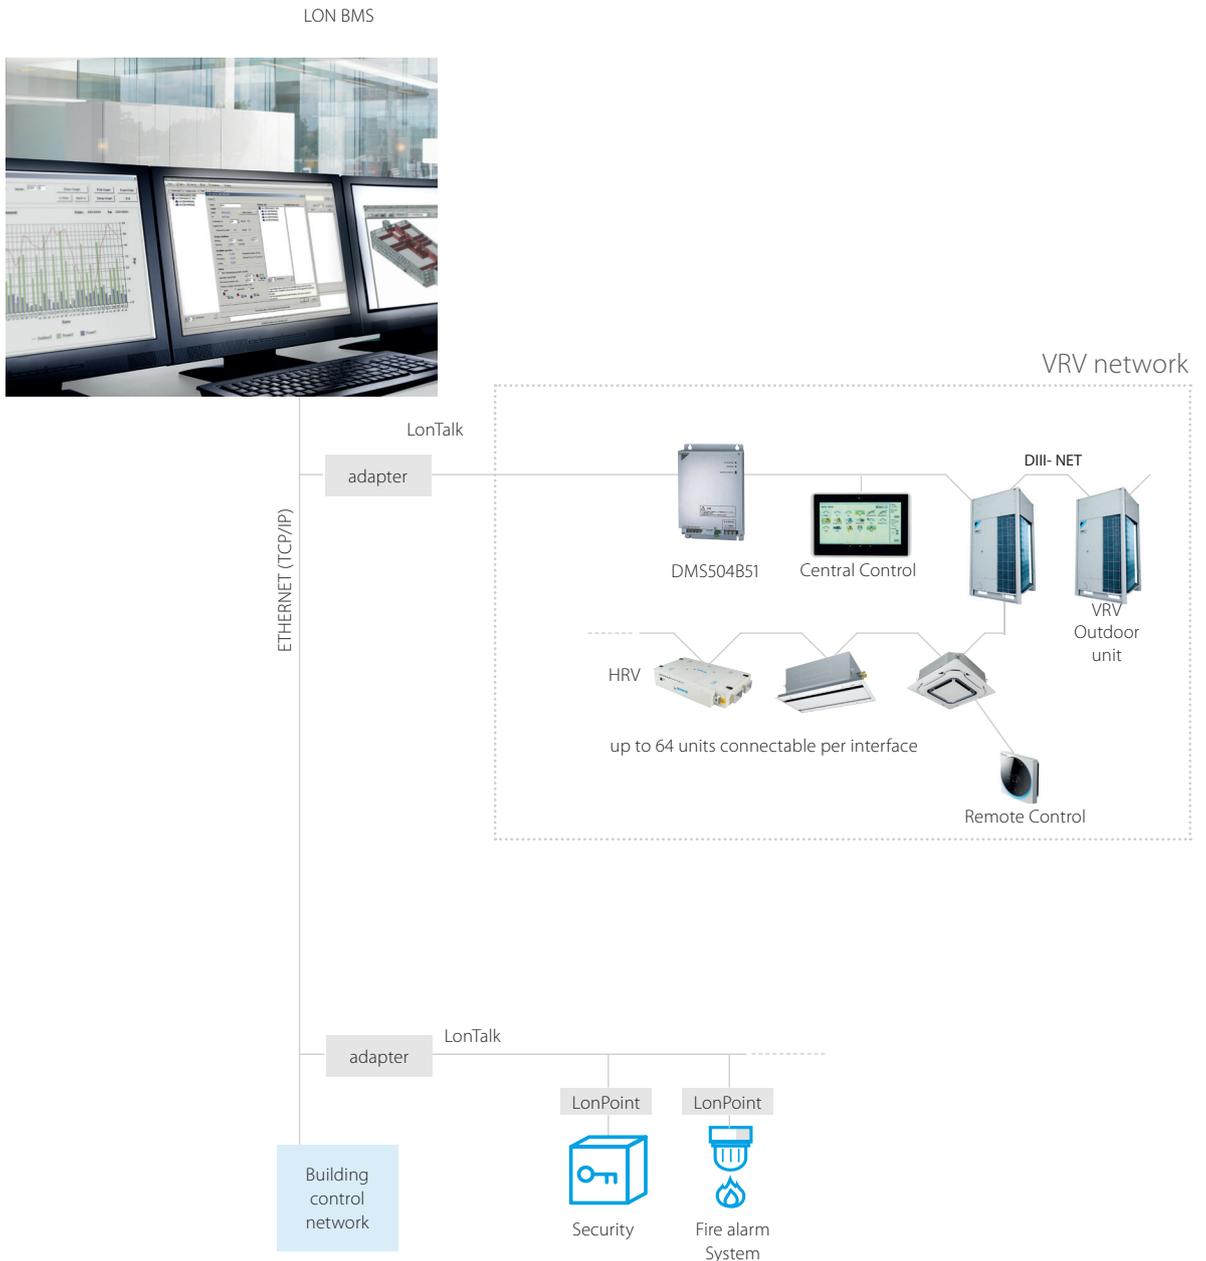

EKPCCAB4

Daikin Configurator Tool + Software

Simplified commissioning:
graphical interface to configure,
commission and upload system
settings

Simplified commissioning

- The Daikin configurator for VRV is an advanced software solution that allows for easy system configuration and commissioning:
- Less time is required on the roof configuring the outdoor unit
- Multiple systems at different sites can be managed in exactly the same way, thus offering simplified commissioning for key accounts
- Initial settings on the outdoor unit can be easily retrieved



Simplified
commissioning



Retrieve initial
system settings



K.RSS

Wireless room temperature sensor for Sky Air and VRV

Flexible and easy installation

- Accurate temperature measurement thanks to flexible placement of the sensor
- No need for wiring
- No need to drill holes
- Ideal for refurbishment



Connection diagram Daikin indoor unit PCB (FXSQ example)



Specifications

		Wireless room temperature sensor kit (K.RSS)	
		Wireless room temperature receiver	Wireless room temperature sensor
Dimensions	mm	50 x 50	ø 75
Weight	g	40	60
Power supply		16VDC, max. 20 mA	N/A
Battery life		N/A	+/- 3 years
Battery type		N/A	3 Volt Lithium battery
Maximum range	m		10
Operation range	°C		0~50
Communication	Type		RF
	Frequency	MHz	868.3

> Room temperature is sent to the indoor unit every 90 seconds or if the temperature difference is 0.2°C or larger.

KRCS*

Wired room temperature sensor for Sky Air and VRV

- Accurate temperature measurement, thanks to flexible placement of the sensor
- Specific model code for each indoor unit can be found in the option tables



Specifications




Dimensions (HxW)	mm	60 x 50
Weight	g	300
Length of branch wiring	m	12

Adapter PCBs

Simple solutions for unique requirements

Concept and benefits

- Low cost option to satisfy simple control requirements
- Deployed on single or multiple units

			Connectable to:		
			Split	Sky Air	VRV
	(E)KRP1B* adapter for wiring	<ul style="list-style-type: none"> › Facilitates integration of auxiliary heating apparatus, humidifiers, fans, damper › Powered by and installed at the indoor unit 		●	●
	KRP2A*/KRP4A* Wiring adapter for electrical appendices	<ul style="list-style-type: none"> › Remotely start and stop up to 16 indoor units (1 group) (KRP4A* via F1 F2) › Remotely start and stop up to 128 indoor units (64 groups) (KRP2A* via P1 P2) › Alarm indication/ fire shut down › Remote temperature setpoint adjustment › Cannot be used in combination with a central controller 		●	●
	SB.KRP58M2	<ul style="list-style-type: none"> › Low noise and demand control option for RZAG-N* and RZASG-M* series. › Obligatory mounted plate EKMKS2A needs to be ordered separately 		●	
	KRP58M51	<ul style="list-style-type: none"> › Low noise and demand control option for RZA-D series. › Includes obligatory mounted plate EKMKS3 › Obligatory mounting plate EKMKS3A3 needs to be ordered separately 		●	
	DTA104A* Outdoor Unit External Control Adapter	<ul style="list-style-type: none"> › Individual or simultaneous control of VRV system operating mode › Demand control of individual or multiple systems › Low noise option for individual or multiple systems 			●
	DCS302A52-9 Unification adapter for computerized control	<ul style="list-style-type: none"> › Enables unified display (operation/malfunction) and unified control (ON/OFF) from BMS system › Must be used together with Intelligent Touch Controller or intelligent Touch Manager › Cannot be combined with KRP2/4* › Can be used for all VRV indoor models 			●
	KRP928* Interface adapter for DIII-net	<ul style="list-style-type: none"> › Allows integration of split units to Daikin central controls 	●		
	KRP980* Adapter for split units without an S21 port	<ul style="list-style-type: none"> › Connect a wired remote control › Connect to Daikin central controls › Allow external contact 	●		
	KRP413* Wiring adapter normal open contact / normal open pulse contact	<ul style="list-style-type: none"> › Switch off auto restart after power failure › Indication of operation mode / error › Remotely start / stop › Remotely change operation mode › Remotely change fan speed 	●		

Some adapters require an installation box, refer to the option lists for more information

Accessories

EKRORO		<ul style="list-style-type: none"> • External ON/OFF or forced off • Example: door or window contact
EKRORO 3		<ul style="list-style-type: none"> • External ON/OFF or forced off • F1/F2 contact • Example: door or window contact
KRC19-26A		<ul style="list-style-type: none"> • Mechanical cool/heat selector • Allows switching over an entire system between cooling/heating/fan only • Connects to the A/B/C terminals of the unit
BRP2A81		<ul style="list-style-type: none"> • Cool/heat selector PCB • Required to connect KRC19-26A to a VRV IV outdoor unit



Options & accessories

Tightfit
VRV5 Outdoor
Ventilation
Control Systems


p. 89
p. 92
p. 96
p. 100

Tightfit

Daikin Tightfit is a non-brazed connection suitable for refrigerant piping. **Pipes can be joined easily and quickly without brazing or using any special tools.** It meets stringent safety requirements and provides leak-free tightness.

- Double edged claw catches the pipe to form tight, **mechanical sealing ISO 14903 certified**
- Specially developed REFNET allows direct connection to Tightfit joints
- Unique mechanical and resin sealing prevents any leak
- Extremely durable: can withstand up to 4 times the maximum operating pressure of R-32 refrigerant (17.2 Mpa)


Tightfit Mechanism

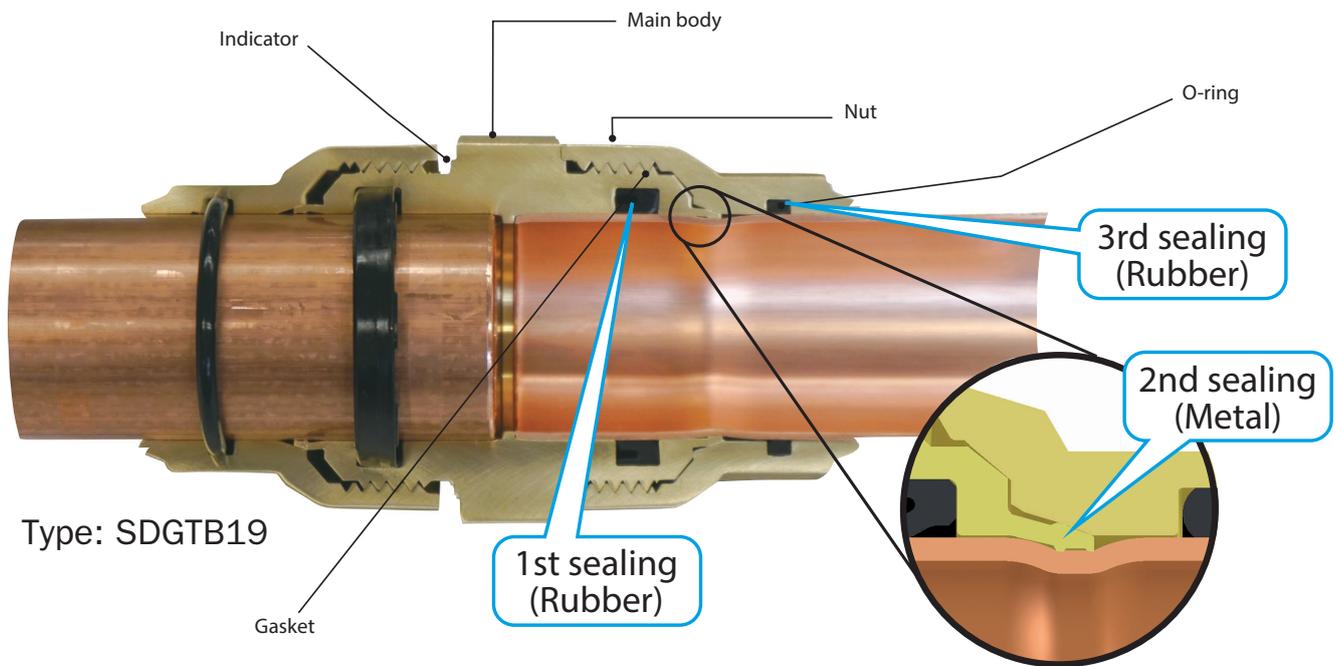

Daikin Tightfit is awarded 3 Ticks Excellent Rating by Singapore Green Building Product (SGBP) scheme. SGBP is a certification for green building products and materials, ensuring that sustainability is integrated throughout the design and manufacturing process of green building products.





Installation in 4 easy steps

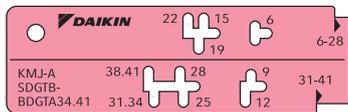



1 Mark the insertion line

Mark the insertion 'T' or 'L' standard line with the marking gauge and marker pen at the proper position of each pipe size.

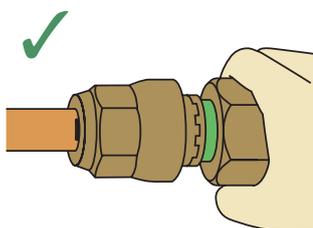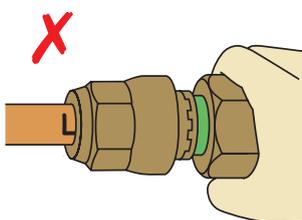



2 Insert the pipe

1. Insert firmly by hand until the pipe stops.
2. Make sure that the insertion standard line is no longer visible.

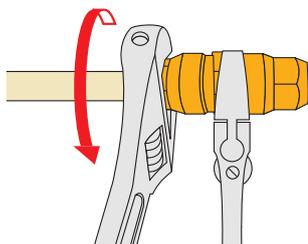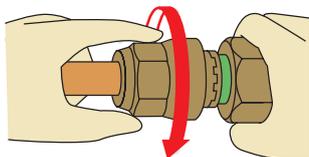



3 Tighten the nut

1. Hold the main body and tighten the nut by hand
2. Hold the main body and tighten the nut with a monkey wrench, until the green indicator disappears and the nut comes into contact with the flat face of the body.

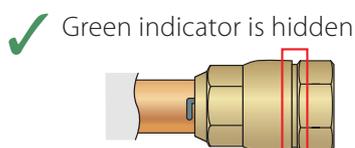

4 Check

1. Green indicator should be hidden.
2. Place the marking gauge on the end face of the nut and make sure that the 'T' or 'L' shaped mark falls completely within the notch in the marking gauge.

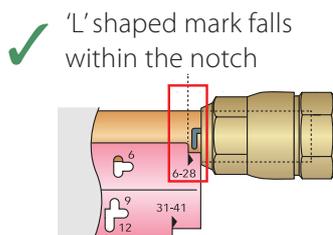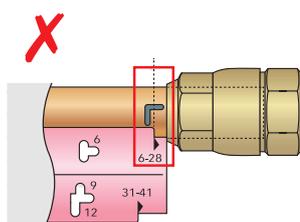

View our installation video!

Tightfit joint





Tightfit REFNET




Tightfit - range and specifications

Standard joints (same size piping on each side)						
	Box Model Name	No. of joints/box	Dimensions			Single Weight (g)
			Diameter	L (mm)	W (mm)	
	SDGTB06_B	100	1/4" (6.35mm)	50.4	15	43
	SDGTB09_B	90	3/8" (9.52mm)	55	19.9	79
	SDGTB12_B	70	1/2" (12.7mm)	59	23.5	113
	SDGTB15_B	60	5/8" (15.9mm)	74	30	210
	SDGTB19_B	45	3/4" (19.1mm)	76.8	34.6	273
	SDGTB22_B	30	7/8" (22.2mm)	83.4	40.2	292
	SDGTB28_B	24	1 1/8" (28.6mm)	88	46.7	515
	BDGTA34_B	20	1 3/8" (34.9mm)	101.5	51.1	686
	BDGTA41_B	16	1 5/8" (41.3mm)	103.5	58.3	881

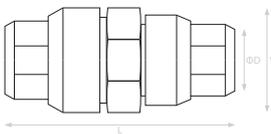Asymmetric joints (different size piping on each side)						
	Box Model Name	No. of joints/box	Dimensions			Single Weight (g)
			Diameter	L (mm)	W (mm)	
	SDGTB0906_B	90	1/4"-3/8" (6.35-9.52mm)	52.7	19.9	67
	SDGTB1209_B	70	3/8"-1/2" (9.42-12.7mm)	57.5	23.5	101
	SDGTB1512_B	60	1/2"-5/8" (12.7-15.9mm)	65	30	164
	SDGTB1915_B	45	5/8"-3/4" (15.9-19.1mm)	76.8	34.6	244
	SDGTB2219_B	30	3/4"-7/8" (19.1-22.2mm)	81.5	40.2	358
	SDGTB2522_B	30	7/8"-1" (22.2-25.4mm)	85.8	43.5	444
	SDGTB2825_B	24	1"-1 1/8" (25.4-28.6mm)	88.1	46.7	505
	SDGTB3428_B	20	1 1/8"-1 3/8" (28.6-34.9mm)	101.5	51.1	645

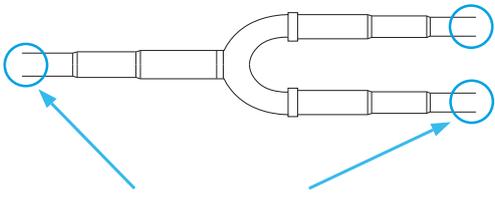Refnets compatible with Tightfit joints						
	Capacity index		Tightfit REFNET	Standard Refnet (for reference only)		
	 <p>Possible to connect Tightfit directly</p>	X < 290	2-pipe	BHRG26A33T	KHRQ22M20TA	
290 <= X <= 640					BHRG26A72T	KHRQ22M20T
						KHRQ22M29T9
640 <= X		BHRG26A73T	KHRQ22M64T			
X < 290		3-pipe	BHRG25A33T	KHRQ22M75T		
				290 <= X <= 640	KHRQ23M20T	
	KHRQ23M29T9					
640 <= X	BHRG25A72T	KHRQ23M64T				
		BHRG25A73T	KHRQ23M75T			

Accessories		New Measuring Tool
		SDGT_GAUGE

Options & accessories

VRV 5 outdoor

		VRV 5 heat recovery		VRV 5 heat pump		VRV S-series		
		REYA8-20 REMA5	2 module systems	RXYA 8~20 RYMA5	2-module systems	RXYS4-6AV1/AY1	RXYS4-12AAAY1	
Kits	Multi-module connection kit (obligatory) - Connects multiple modules into a single refrigerant system		2 modules: BHFQ23P907A		2 modules: BHFA22P1007			
	Extended level difference kit - Allows outdoor unit to be more than 50m above indoor units	Special order unit						
	Central drain pan kit - Installs onto the underside of the outdoor unit and collects drain water from all bottom plate outlets into a single outlet. In cold areas should be heated by a field-supplied heater to prevent drain water from freezing in the drain pan.							
	Bottom plate heater - To keep drain holes ice-free in extreme weather conditions (one per outdoor unit needed)	5/8-12: EKBPH012TA 14-20: EKBPH020TA	1 kit per system	5/8-12: EKBPH012TA 14-20: EKBPH020TA	1 kit per system	EKBPH250D		
Adapters	External control adapter for outdoor unit - Allows to activate Low Noise Operation and three levels of demand control, limiting power consumption via external dry contacts. Connects to the F1/F2 communication line and requires power supply from an indoor unit, BSVQ box, or VRV-WIII outdoor unit.	DTA104A53/61/62 For installation into an indoor unit: exact adapter type depends on type of indoor unit. For 14-20 HP the demand PCB mounting plate is required (2). See Options & Accessories of indoor units				DTA104A53/61/62 For installation into an indoor unit: exact adapter type depends on type of indoor unit. See Options & Accessories of indoor units		
	KRC19-26 Mechanical cool/heat selector – allows to switch an entire Heat Pump system, or one BS-box of a Heat Recovery system between cooling, heating and fan only. Connects to the A-B-C terminals of the outdoor unit / BS-box.			● (3)		● (3)	Standard on unit	
	Cool/heat selector PCB (required to connect KRC19-26)			EKBRP2A81		Standard on unit	Standard on unit	
Others	EKCHSC - Cool/heat selector cable							
	EKPCCAB4 VRV configurator					●		
	DTA109A51 DIII-net expander adapter	● (2) (4)		● (2) (4)				
	BPMKS967A2/A3 Branch provider (for connection of 2/3 RA indoor units)							
	EKDK04 Drain plug kit							
	EKLN140A Sound enclosure					●		

Refnets

		Refnet Joints				Refnet Headers		
		Capacity index	Capacity index	Capacity index	Capacity index	Capacity index	Capacity index	Capacity index
		< 200	200 ≤ x < 290	290 ≤ x < 640	> 640	< 290	290 ≤ x < 640	> 640
Refnets	Imperial-size connections for heat recovery pump (2-pipe)	For all R-410A VRV: KHRQ22M20T For all R-410A+R-32 VRV: KHRQ22M20TA	KHRQ22M29T9	For all R-410A VRV: KHRQ22M64T For all R-32 VRV: KHRA22M65T	KHRQ22M75T	KHRQ22M29H	For all R-410A VRV: KHRQ22M64H For all R-32 VRV: KHRA22M65H	KHRQ22M75H
	Imperial-size connections for heat recovery pump (2-pipe) (1)	KHRQ23M20T	KHRQ23M29T	KHRQ23M64T	KHRQ23M75T	KHRQ23M29H	KHRQ23M64H	KHRQ23M75H

(1) For metric size connections, contact your local sales responsible

Branch selector boxes

		VRV 5 Heat Recovery Branch Selector (BSSV) boxes	VRV 5 Heat Pump optional Shut off valve (SV) boxes
		Multi port	Single & multi port
		BS-A14AV1B	SV-A
Options for Branch selector boxes (BS box) (only for connection with VRV heat recovery system)	Closed pipe kit		Accessories in the box
	Joint kit	EKBSJK	EKBSJK (2)
	Duct connection: To connect extraction of BSSV boxes in serial	EKBSDCK	EKBSDCK
	Drain pump kit	K-KDU303KVE	K-KDU303KVE

(2) not applicable for SV1A25A

Options & accessories

VRV 5 outdoor R-32

		Ceiling mounted cassette units		
		Round flow (800x800)	Fully flat (600x600)	Corner (1-way)
		FXFA-A	FXZA-A	FXKA-A
Panels	Decoration panel (obligatory for cassette units, optional for others, rear panel for FXLQ)	Standard panels: BYCQ140E (white) / BYCQ140EW (full white)(3) / BYCQ140EB (black) Auto cleaning (5)(6): BYCQ140EGF (white) / BYCQ140EGFB (black) Designer panels: BYCQ140EP (white) / BYCQ140EPB (black)	BYFQ60C4WIW (white panel) (19) BYFQ60C4WIS (grey panel) (19) BYFQ60B3WI (standard panel) (20)	20-32: BYK32G 40-63: BYK63G
	Panel spacer for reducing required installation height		KDBQ44B60 (Standard panel)	
	Sealing kit for 3- or 2-directional air discharge	KDBHQ56B140 (7)	BDBHQ44C60 (white & grey panel)	
Sensor kit	BRYQ140B (white panels) BRYQ140BB (black panels) BRYQ140C (white designer panel) BRYQ140CB (black designer panel)	BRYQ60A3W (white) BRYQ60A3S (grey)		
Individual control systems	Infrared remote control (incl. receiver)	BRC7FA532F (white panels) (7)(15) BRC7FA532FB (black panels) (7)(15) BRC7FB532F (white designer panel) (7)(15) BRC7FB532FB (black designer panel) (7)(15)	BRC7F530W (9) (10) (white panel) BRC7F530S (9) (10) (grey panel) BRC7EB530W (9) (10) (standard panel)	
	BRP069C51 - Onecta app	•	•	•
	Madoka BRC1H52W (White) / BRC1H52S (Silver) / BRC1H52K (Black) User-friendly wired remote controller with premium design	• (mandatory)	• (mandatory)	• (mandatory)
	BRC1E53A/B/C - Wired remote control with full-text interface and back-light			
	BRC1D52 (4) - Standard wired remote control with weekly timer			
Centralised control systems	DCC601A51 - intelligent Tablet Controller	•	•	•
	DCS601C51 (12) - intelligent Touch Controller	•	•	•
	DCS302C51 (12) - Central remote controller	•	•	•
	DCS301B51 (12) (13) - Unified ON/OFF controller	•	•	•
Building Management System & Standard protocol interfaces	for individual control			
	EKMBPP1 - Modbus interface for monitoring and control (check compatibility)	•	•	•
	RTD-10 - Modbus interface for infrastructure cooling	•	•	•
	RTD-20 - Modbus interface for retail	•	•	•
	RTD-HO - Modbus interface for hotel	•	•	•
	KLIC-DI_V2 - KNX Interface	•	•	•
	for central control			
	DCM601B51 - intelligent Touch Manager	•	•	•
	DGE601A51 - Edge adapter for connection to Daikin Cloud Plus	•	•	•
	DGE602A51 - Edge lite adapter for connection to Daikin Cloud Plus	•	•	•
	EKMDBDXB - Modbus interface	•	•	•
	DCM010A51 - Daikin PMS interface	•	•	•
	DMS502A51 - BACnet Interface	•	•	•
	DMS504B51 - LonWorks Interface	•	•	•
Filters	Auto cleaning filter	see decoration panel		
	UV Streamer kit (purifies the air of pollutants such as viruses, bacteria, fine dust, odours, allergens, etc ensuring a healthy indoor environment)	UV Streamer kit Replacement filter	BAEF125AWB (22) BAF55A125	
	High efficiency filter		ePM10 60% BAF552AA160 (23) (BAF552AA160-5: box of 5 filters) (BAF552AA160-10: box of 10 filter)	
	Replacement long life filter, non-woven type		KAF5511D160	KAF441C60
Pre-filter Filter chamber				
Wiring and sensors	K.RCS - External wired temperature sensor	KRCS01-5B	KRCS01-6B	KRCS01-6B
	K.RSS - External wireless temperature sensor	SB.K.RSS_RFC (EKEWTSC-2 + K.RSS)	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)
Adapters	Adapter with 2 output signals (Compressor / Error, Fan output)	KRP1BA58 (2)(7)	ERP02A50 (2)	ERP02A50 (2)
	Adapter with 4 output signals (Compressor / Error, Fan, Aux. heater, Humidifier output)	EKRPI12 (2)(7)	EKRPI14 (2)	EKRPI14 (2)
	Adapter for centralised external monitoring/control via dry contacts and setpoint control via 0-140Q (for dedicated indoor)	KRP4A53 (2)(7)	KRP4A53 (2)	KRP4A53 (2)
	Adapter for external central monitoring/control (controls 1 entire system)		KRP2A52	KRP2A52
	Adapter for keypad and/or window contact connection (2)(11)	BRP7A53	BRP7A53 (2)	BRP7A51 (2)
	Adapter for multi-tenant applications (24VAC PCB power supply interface)	DTA114A61	DTA114A61	DTA114A61
	External control adapter for outdoor unit (installation on indoor unit)			
	Installation box / Mounting plate for adapter PCBs (For units where there is no space in the switchbox)	KRP1H98A (7) KRP1BC101	KRP1BC101	KRP1BC101 / KRP4B93
Wiring kit for Remote ON/OFF or Forced OFF	Standard	Standard	Standard	
Relay PCB for output signal of refrigerant sensor	ERP01A51 (2)	ERP01A50 (2)	ERP01A50 (2)	
Others	Drain pump kit	Standard	Standard	Standard
	Multi zoning kit (for detailed model code overview refer to multizoning argue card in this catalogue)			
	Fresh air intake kit (direct installation type)	KDDP55C160-1 + KDDP55D160-2 (7)(8)	KDDQ44XA60	
	Air discharge adapter for round duct			
	L-type piping kit			
Insulation kit for high humidity				

(1) pump station is necessary for this option

(2) Installation box is necessary for these adapters

(3) The BYCQ140EW has white insulation. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140EW decoration panel in environments exposed to concentrations of dirt*

(4) Not recommended because of the limitation of the functions

(5) To be able to control the BYCQ140EGF(B) the controller BRC1E or BRC1H* is needed

(6) The BYCQ140EGF(B) is not compatible with Multi and Split Non-Inverter Outdoor units

(7) Option not available in combination with BYCQ140EGF(B)

(8) Both parts of the fresh air intake are needed for each unit

(9) Cannot be combined with sensor kit

(10) Independently controllable flaps function not available

(11) Only possible in combination with BRC1H* / BRC1E*

(12) When fixing box is required, use KJB212A, KJB311A or KJB411A depending on the size of the controller

Concealed ceiling units (duct units)			Ceiling suspended units		Wall mounted units
Slim	Medium ESP	High ESP	1-way blow	4-way blow	
FXKA-A	FXSA-A	FXMA-A	FXHA-A	FXUA-A	FXAA-A
				BRE49B2F	
BRC4C65	BRC4C65	BRC4C65	BRC7GA53-9	BRC7C58	BRC7EA630
●	●	●	●	●	●
● (mandatory)	● (mandatory)	● (mandatory)	● (mandatory)	● (mandatory)	● (mandatory)
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
15-32: BAE20A62 40-50: BAE20A82 63: BAE20A102					
		Replacement filters for 200~250: BAFM503A250 (65%) (Z1) BAFH504A250 (90%) (Z1)			
		200~250: BAFL502A250 (Z1)	32: KAF501B56 50~63: KAF501B80 71~100: KAF501B160	KAFP551K160	
		200~250: BAFL501A250 (Z1) 200~250: BDD500B250			
KRCS01-6B	KRCS01-6B	KRCS01-6B	KRCS01-6B	KRCS01-6B	KRCS01-6B
SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS) KRP1BA58	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)
ERP02A50 (2)	EKRP1C14 (2)	EKRP1C14 (2)		EKRP1C14 (2)	ERP02A50 (2)
KRP4A54-9 (2)	KRP4A52 (2)	50~125: KRP4A52 200~250: KRP4A51	KRP4A52 (2)	KRP4A53 (2)	KRP4A51 (2)
KRP2A53 (2)	KRP2A51 (2)	KRP2A51	KRP2A62		KRP2A61(2)
BRP7A54	BRP7A51	BRP7A51	BRP7A52 (2)	BRP7A53	BRP7A51 (2)
DTA114A61	DTA114A61	DTA114A61	DTA114A61-9	DTA114A61-9	DTA114A61
DTA104A53	DTA104A61 (2)	DTA104A61 (2)	DTA104A61	DTA104A61	DTA104A51(2) / DTA104A61(2)
KRP1BC101 / KRP4B93	KRP1BC101	KRP1BC101	KRP1D93A/KRP4B93	KRP1B97 / KRP1C97	KRP4A93
	Standard	Standard	standard	standard	Standard
ERP01A51 (2)	ERP01A50 (2)	ERP01A50	ERP01A51 (2)	ERP01A51 (2)	ERP01A51 (2)
Standard	Standard	200~250: BDU510B250VM	32-50-63: KDU50R63 100: KDU50R160		K-KDU572KVE
	15~32: KDAP25A36A 40~50: KDAP25A56A 63~80: KDAP25A71A 100~125: KDAP25A140A 140: -	50~80: KDAJ25K71 100~125: KDAJ25K140 200~250: -			
			32: KHFP5M35 50~63: KHFP5N63 71~100: KHFP5N160		
KDT25N32 / KDT25N50 / KDT25N63					

(13) Option KEK26-1A (Noise filter) is required when installing DCS301B51

(14) Wire harness EKEWTSC is necessary

(15) The active airflow circulation function is not available for this controller.

(16) Up to 2 adaptor PCBs can be installed per installation box

(17) Only one installation box can be installed per indoor unit

(18) VRV R-32 indoor units cannot be connected to this controller

(19) The BYFQ60C4* R-32 panels can be connected to R-410A indoor units with wire harness EKRS22

(20) Wire harness EKRS23 is necessary

(21) Filter chamber needed

(22) Only possible in combination with BYCQ140E and BYCQ140EW. Cannot be combined with other filters, chambers, fresh air intake kits or air discharge outlet sealing member kit

(23) Only possible in combination with BYCQ140E/EW/EB. Cannot be combined with other filters, chambers, fresh air intake kits or discharge outlet sealing member kit

Options - Ventilation

		Energy recovery ventilation - VAM								
		VAM 150FC9	VAM 250FC9	VAM 350J8	VAM 500J8	VAM 650J8	VAM 800J8	VAM 1000J8	VAM 1500J8	VAM 2000J8
Individual control systems	BRC301B61 VAM wired remote control	•	•	•	•	•	•	•	•	•
	Madoka BRC1H52W (White) / BRC1H52S (Silver) / BRC1H52K (Black) User-friendly wired remote controller with premium design	•	•	•	•	•	•	•	•	•
	BRC1E53A/B/C Wired remote control with full-text interface and back-light	•	•	•	•	•	•	•	•	•
	BRC1D52 Standard wired remote control with weekly timer	•	•	•	•	•	•	•	•	•
Centralised control systems	DCC601A51 intelligent Tablet Controller	•	•	•	•	•	•	•	•	•
	DCS601C51 intelligent Touch Controller	•	•	•	•	•	•	•	•	•
	DCS302C51 Central remote control	•	•	•	•	•	•	•	•	•
	DCS301B51 Unified ON/OFF control	•	•	•	•	•	•	•	•	•
Building Management System & Standard protocol interface	DCM601A51 intelligent Touch Manager	•	•	•	•	•	•	•	•	•
	EKMBDXB Modbus interface	•	•	•	•	•	•	•	•	•
	DMS502A51 BACnet Interface	•	•	•	•	•	•	•	•	•
	DMS504B51 LonWorks Interface	•	•	•	•	•	•	•	•	•
Filters	Coarse 55% (G4)									
	ePM10 75% (M5)									
	ePM10 70% (M6)			EKAFVJ50F6	EKAFVJ50F6	EKAFVJ65F6	EKAFVJ100F6	EKAFVJ100F6	EKAFVJ100F6 x2	EKAFVJ100F6 x2
	ePM1 50% (F7)									
	ePM1 60% (F7)			EKAFVJ50F7	EKAFVJ50F7	EKAFVJ65F7	EKAFVJ100F7	EKAFVJ100F7	EKAFVJ100F7 x2	EKAFVJ100F7 x2
	ePM1 70% (F8)			EKAFVJ50F8	EKAFVJ50F8	EKAFVJ65F8	EKAFVJ100F8	EKAFVJ100F8	EKAFVJ100F8 x2	EKAFVJ100F8 x2
	ePM1 80% (F9)									
	High efficiency filter									
	Replacement air filter									
Mechanical accessories	Rail									
	Rectangular to round duct transition									
	Separate plenum								EKPLEN200 (5)	EKPLEN200 (5)
CO ₂ sensor			BRYMA65	BRYMA65	BRYMA65	BRYMA100	BRYMA100	BRYMA200	BRYMA200	
Electrical heater for pre treatment of fresh air	GSIEKA10009	GSIEKA15018	GSIEKA20024	GSIEKA20024	GSIEKA25030	GSIEKA25030	GSIEKA25030	GSIEKA35530 (6)		
DX coil for post treatment of fresh air				EKVDX32A	EKVDX50A	EKVDX50A	EKVDX80A	EKVDX100A	EKVDX100A	
Silencer (900mm depth)										
Electrical accessories	Wiring adapter for external monitoring/control (controls 1 entire system)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)
	Adapter PCB for humidifier									
	Adapter PCB for third party heater	BRP4A50A	BRP4A50A	BRP4A50A (4)	BRP4A50A (4)	BRP4A50A (3/4)	BRP4A50A (4)	BRP4A50A (4)	BRP4A50A (3/4)	BRP4A50A (3/4)
	External wired temperature sensor									
	Adapter PCB Mounting plate	EKMP25VAM	EKMP25VAM			EKMP65VAM			EKMPVAM	
	Installation box for adaptor PCB	KRP1BB101	KRP1BB101	KRP1BB101	KRP1BB101	KRP1BB101	KRP1BB101	KRP1BB101	KRP1BB101	KRP1BB101

Notes

- (1) Do not connect the system to DIII-net devices LONWorks interface, BACnet interface, ...; (intelligent Touch Manager, EKMBDXA are allowed)
- (2) Installation box needed
- (3) Adapter PCB mounting plate needed, applicable model can be found in the table above
- (4) 3rd party heater and 3rd party humidifier cannot be combined
- (5) Contains 1 plenum and can be used for half side of the unit (up to 4 plenums can be used on 1 unit)
- (6) Available only with optional plenum

Options - Ventilation

Accessories	Modular L Pro						Modular T Pro				
	ALB02LB ALB02RB	ALB03LB ALB03RB	ALB04LB ALB04RB	ALB05LB ALB05RB	ALB06LB ALB06RB	ALB07LB ALB07RB	ATB03RA ATB03LA	ATB04RA ATB04LA	ATB05RA ATB05LA	ATB06RA ATB06LA	ATB07RA ATB07LA
Iso Coarse 55% (G4) Filter	ALF02G4A	ALF03G4A	ALF05G4A		ALF07G4A		ATF03G4A	ATF04G4A	ATF05G4A	ATF06G4A	ATF07G4A
ePM10 75% (M5) Filter	ALF02M5A	ALF03M5A	ALF05M5A		ALF07M5A		ATF03M5A	ATF04M5A	ATF05M5A	ATF06M5A	ATF07M5A
ePM1 50% (F7) Filter	ALF02F7A	ALF03F7A	ALF05F7A		ALF07F7A		ATF03F7A	ATF04F7A	ATF05F7A	ATF06F7A	ATF07F7A
ePM1 80% (F9) Filter	ALF02F9A	ALF03F9A	ALF05F9A		ALF07F9A		ATF03F9A	ATF04F9A	ATF05F9A	ATF06F9A	ATF07F9A
Sound attenuator	ALS0290A	ALS0390A	ALS0590A		ALS0790A		ATS0360A	ATS0460A	ATS0560A	ATS0660A	ATS0760A
Rails for door	ALA02RLA	ALA03RLA	ALA05RLA		ALA07RLA						
Duct transition	ALA02RCA	ALA03RCA	ALA05RCA		ALA07RCA						
Mixing damper							ATA03MDA	ATA04MDA	ATA05MDA	ATA06MDA	ATA07MDA
External damper							ATA03EDA	ATA04EDA	ATA05EDA	ATA06EDA	ATA07EDA
Electric pre heater ¹	ALD02HEFA	ALD03HEFA	ALD05HEFA		ALD07HEFA		ATD03HEFAU	ATD04HEFAU	ATD05HEFAU	ATD06HEFAU	ATD07HEFAU
Electric post heater ¹	ALD02HESA	ALD03HESA	ALD05HESA		ALD07HESA		ATD03HESAU	ATD04HESAU	ATD05HESAU	ATD06HESAU	ATD07HESAU
DX coil ²							ATD03UDSAR	ATD04UDSAR	ATD05UDSAR	ATD06UDSAR	ATD07UDSAR
							ATD03UDSAL	ATD04UDSAL	ATD05UDSAL	ATD06UDSAL	ATD07UDSAL
WATER coil ²	ALD02CWSA	ALD03CWSA	ALD05CWSA		ALD07CWSA		ATD03UWSAR	ATD04UWSAR	ATD05UWSAR	ATD06UWSAR	ATD07UWSAR
							ATD03UWSAL	ATD04UWSAL	ATD05UWSAL	ATD06UWSAL	ATD07UWSAL
Water pre heating coil	ALD02HWUA	ALD03HWUA	ALD05HWUA		ALD07HWUA		ATD03HWFUA	ATD04HWFUA	ATD05HWFUA	ATD06HWFUA	ATD07HWFUA
Water post heating coil ²	ALD02HWUA	ALD03HWUA	ALD05HWUA		ALD07HWUA		ATD03HWSAR	ATD04HWSAR	ATD05HWSAR	ATD06HWSAR	ATD07HWSAR
							ATD03HWSAL	ATD04HWSAL	ATD05HWSAL	ATD06HWSAL	ATD07HWSAL
Water valve 2 way cooling	ALV02CW2A	ALV03CW2A	ALV05CW2A		ALV07CW2A		ATV03CW2A	ATV04CW2A	ATV05CW2A	ATV06CW2A	ATV07CW2A
Water valve 2 way heating	ALV02HW2A	ALV03HW2A	ALV05HW2A		ALV07HW2A		ATV03HW2A	ATV04HW2A	ATV05HW2A	ATV06HW2A	ATV07HW2A
Water valve 3 way cooling	ALV02CW3A	ALV03CW3A	ALV05CW3A		ALV07CW3A		ATV03CW3A	ATV04CW3A	ATV05CW3A	ATV06CW3A	ATV07CW3A
Water valve 3 way heating	ALV02HW3A	ALV03HW3A	ALV05HW3A		ALV07HW3A		ATV03HW3A	ATV04HW3A	ATV05HW3A	ATV06HW3A	ATV07HW3A
Valve modulating actuator	ALE00AMVA						ATE00AMVA				
Damper modulating actuator							ATE00AMDA				
Digital PCB							ATE00DPUA				
Frost switch							ATE00FSUA				
CO ₂ sensor							ALP00COA				
Humidity sensor							ALP00HUA				
Temperature probe							ALP00TEA				
Room Interface							ALC00822A (POL 822)				
Commissioning module							ALC00895A (POL 895)				
Modbus RTU module							ALC00902A (POL 902)				
Bacnet IP module							ALC00908A (POL 908)				
LonWorks Interface											
Intelligent Touch Manager											
Intelligent Tablet Controller											
Intelligent Touch Controller											
Central remote control											
Unified ON/OFF control											

Notes

- (1) For modular T pro only, both electric heater can be used as pre and post heater
- (2) For modular T pro only, sixth digit on main unit material name has to be aligned with last digit of the coil material name
 ATB0*RA --> ATD00*UDSAR
 ATB0*LA --> ATD00*UDSAL
 ATB0*RA --> ATD00*UWSAR
 ATB0*LA --> ATD00*UWSAL
 ATB0*RA --> ATD00*HWSAR
 ATB0*LA --> ATD00*HWSAL
- (3) Please refer to the selection software for more details on accessories and their incompatibilities.

Options - Control systems

Individual and centralised controls

	BRC1D*	BRC1E*	BRC1H*	DCS301B51	DST301B51	DCS302C51	DCS601C51
Madoka Assistant app for advanced settings			•				
Electrical box KJB111A	•	•	•				
Electrical box KJB212A(A) (1)	•	•		•	•		
Electrical box KJB311A(A)						•	
Electrical box KJB411AA							•

(1) recommended as wider (more stable mounting)

Intelligent Tablet Controller - DCC601A51

		intelligent Controller
		Options for local control
Wired screen for local control	AL-CCD07-VESA-1	•
Commissioning tool		•
Software update tool		•

Standard protocol interfaces - DMS502A51

		BACnet Interface
DIII-net expansion board (2 ports), connects up to 128 additional indoor units	DAM411B51	•
Digital pulse inputs (12) for PPD functionality	DAM412B51	•



Launching VRV 5 heat pumps

Continuing our path to lower CO₂ equivalent solutions



VRV 5 S-series



VRV 5 Heat Recovery



VRV 5 Heat Pump

Decarbonisation of buildings made easy: Benefit from leading VRV 5 technology!

Adapts to any building

- › Extensive piping lengths & heights
- › 5 low sound steps down to 41 dB(A)

Reduces the CO₂ footprint significantly

- › High, real life seasonal efficiency
- › Lower GWP refrigerant R-32

Shirudo Technology provides peace of mind

- › Easy installation of R-32 VRV in any size of room
- › Factory-integrated refrigerant control measures avoids time-consuming studies
- › 3rd party certification according to the product standard IEC60335-2-40

Widest R-32 portfolio to match any application

- › 11 indoor unit models in 96 variations
- › Plug & Play ventilation solutions from 150 up to 140,000 m³/h
- › Strong range of intuitive, cloud based controls

Specialised advice and support

- › Maximise BREEAM, LEED, ... scores thanks to VRV 5 and our expert support
- › Online support software to ensure compliance with product standards

Learn more by visiting www.daikin.eu/vrv5

Daikin Europe N.V. Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Publisher)



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Liquid Chilling Packages and Hydronic Heat Pumps, Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

FSC

ECPEN24-213 02/2024
Printed on non-chlorinated paper.