


PREJ-T

Insulated plenum for grilles with round-duct connection

Description

Galvanized steel insulated plenum for supply grilles PREJ. Mechanical air flow. Round/elliptical connection for round duct that can be adapted to front or superior round sleeve.

Compatible with AirQ supply grilles without regulation elements.

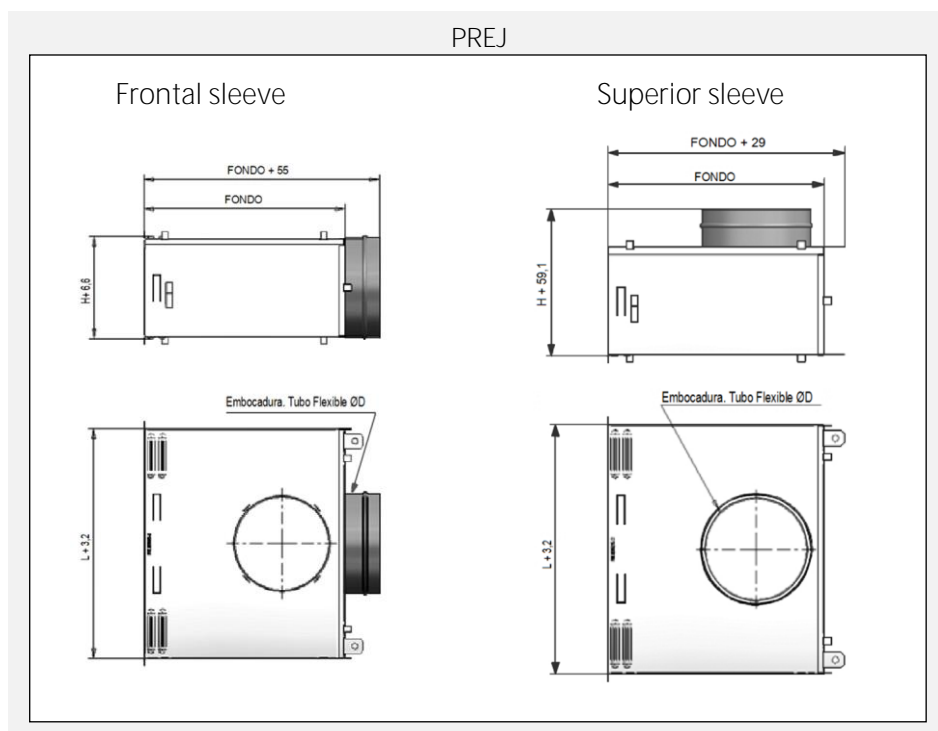

Technical specs

Sizes	L: 200 - 800 mm, H: 100 – 300 mm
Material	Galvanized sheet (1mm wide)
Insulation	Type: 25 Bs1d0 + PS. Alu Width: 5 mm
Fixing	On mounting frames False ceiling suspension support
Type of sleeve	Round / elliptical (different diameters according to model)
Compatible accessories	Insulated flexible duct (TFTA) and non-insulated flexible duct (TFST)

Number/diameter of the sleeves according to size and depth (mm)

HxL	Number/diameter according to size (Depth)												
	200	250	300	350	400	450	500	550	600	650	700	750	800
100	160* (XS)	160* (XS)	160* (XS)	160* (XS)	160* (XS)	2x160* (XS)	2x160* (XS)	2x160* (XS)	2x160* (XS)	2x160* (XS)	2x160* (XS)	2x160* (XS)	2x160* (XS)
150	160 (S)	160 (S)	160 (S)	160 (S)	200* (S)	200* (S)	200* (S)	200* (S)	200* (S)	2x160 (S)	2x160 (S)	2x160 (S)	2x160 (S)
200	160 (S)	160 (S)	200 (M)	200 (M)	200 (M)	200 (M)	200 (M)	250* (M)	250* (M)	250* (M)	250* (M)	2x200 (M)	2x200 (M)
250	160 (S)	200 (M)	200 (M)	200 (M)	250 (M)	250 (L)	250 (L)	250 (L)	250 (L)	250 (L)	300* (L)	300* (L)	300* (L)
300	200 (M)	200 (M)	200 (M)	250 (L)	250 (L)	250 (L)	250 (L)	300 (XL)	300 (XL)	300 (XL)	300 (XL)	300 (XL)	2x250 (L)

(*) Elliptical

L: Length (mm)
H: Height (mm)

XS: 257,4 mm
S: 307,4 mm
M: 357,4 mm
L: 407,4 mm
XL: 457,4 mm